

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[95228-301](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

PRODUCT NUMBER
95228-YXXLF


RoHS COMPATIBLE, SEE NOTE 7

PLATING

3=0.76µm GOLD/GXT ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL
1.27µm NI MIN UNDERPLATING




STYLE	SIZE	OMIT PIN POSITION
01	2x17	A5;A6;A7;A9;A10;A12;A13;A15;A16 B5;B6;B7;B9;B10;B12;B13;B15;B16

TOP VIEW

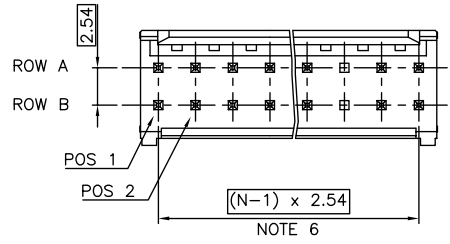

NOTES:

- BODY MATERIAL: POLYESTER 30% GLASSFILLED COLOR BLUE, FLAME RETARDANT PER UL-94 V0.
- CONTACT MATERIAL: PHOSPHOR BRONZE.
- 15N MIN PIN RETENTION IN EITHER DIRECTION
- 0.6 MAX PROTRUSION PERMITTED AT 4 PLACES
- PACKAGING :
- POLYBAGS FROM 2 x 02 TO 2 x 06 POSITIONS
- TUBE FROM 2 x 07 TO 2 x 36 POSITIONS
- TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - PLATING:
- "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.
 - MANUFACTURING PROCESS COMPATIBILITY
- THE HOUSING WILL WITHSTAND EXPOSURE TO 245°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - LABELING:
- MEETS PACKAGING SPECS AS PER GS-14-920
 - LEGAL STATEMENT: SEE GS-47-0004

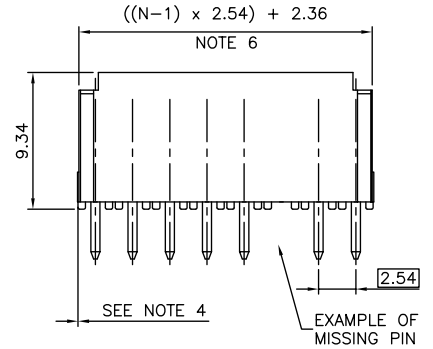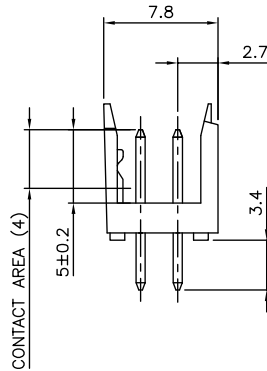

mat'l. code	surface	tolerance	projection	product family
SEE NOTES	ISO 1302 ✓	ISO 446 ISO 1101	mm	DUBOX HDR
ltr	ecn	no	dr	date
A	F90603	PNZ	95.08.18	
B	F05-0117	LMU	05.01.31	
C	F05-0244	JCO	05-09.08	
D	F06-0228	LMU	06.07.11	
E	F08-0147	YOV	08.04.14	
F	B-19285	AMA	14.11.03	
G	F-21810	AMA	15.06.19	
		app	JMP	95.08.18
sheet	revision			
index	sheet			

PDS: Rev : G

STATUS: Released Printed: Sep 01, 2015

FCIconnect.com
Copyright FCI