



Distributor of FCI: Excellent Integrated System Limited

Datasheet of D37S24B4PL00LF - D-Sub Connector Receptacle, Female Sockets 37 Position
Through Hole Solder

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[FCI](#)

[D37S24B4PL00LF](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

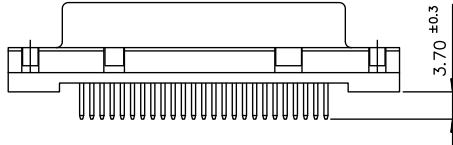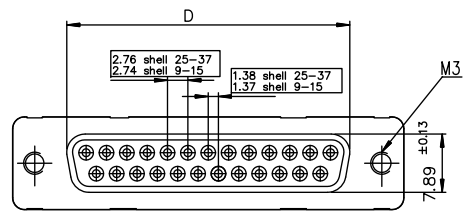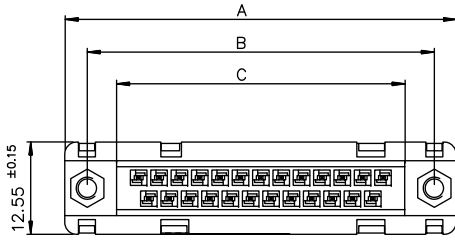

PC card drilling dimensions(after plating)
(thickness 2.40±0.20mm)

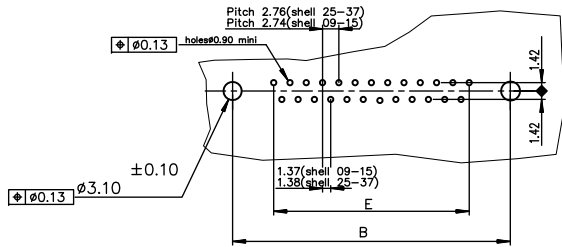

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24B.PL00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24B.PL00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24B.PL00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24B.PL00LF

Plating: 4 --> flash AU
Plating: 6 --> 0.76µ AU

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6±0.15 mm.

mat'l. code	surface	tolerance	projection	product family
-	ISO 1302	ISO 406 ISO 1101		D-SUB
ltr	ecn no	dr	date	title
E	BX-I-2256	AB	2015/07/14	FEMALE CONNECTOR DELTA-D
				STRAIGHT - SOLDER TYPE FOR PCB 2.4mm
				angles
				linear
				0±2°
				scale 2:1
	dr	LELEON	1992/09/16	dwg no
	engr	ALIAS BABU	2015/07/14	sheet 1 of 1
	chr	MITHUN PAUL	2015/07/14	size
	app	BIJU K PAUL	2015/07/14	A3
sheet	revision	E		type
index	sheet	1		Product Customer Drawing