



**Distributor of FCI: Excellent Integrated System Limited**

Datasheet of D37S24A4PX00LF - D-Sub Connector Receptacle, Female Sockets 37 Position  
Through Hole Solder

Contact us: [sales@integrated-circuit.com](mailto:sales@integrated-circuit.com) Website: [www.integrated-circuit.com](http://www.integrated-circuit.com)

---

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[FCI](#)

[D37S24A4PX00LF](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

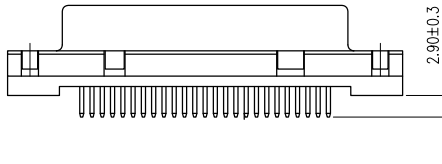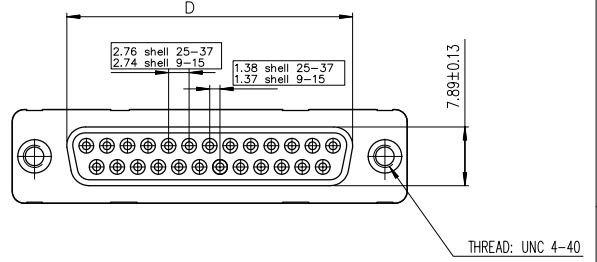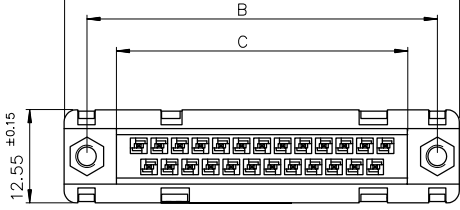

PC card drilling dimensions(after plating)  
(thickness 1.60 ± 0.20mm)

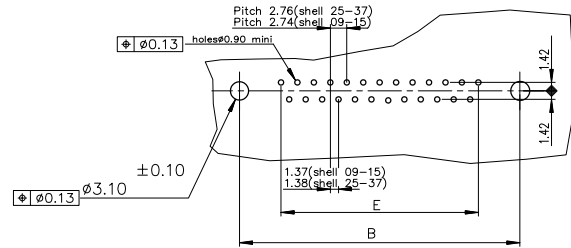

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6.0 ± 0.15 mm.

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0000

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24A.PX00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24A.PX00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24A.PX00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24A.PX00LF

Plating: 4 --> Flash Au  
Plating: 6 --> 0.76 μ Au

mat'l. code	surface	ISO 1302	tolerance	ISO 406	ISO 1101	projection	product family
lfr	ecr no	dr	date	tolerances unless otherwise specified		MM	D-SUB
E	ELX-I-22878	AB	2015/01/06	angles	linear	scale 2:1	title
				0°±2°	.00±0.1		FEMALE CONNECTOR STD EUROPE
				dr	JOUBERT	1996/09/10	STRAIGHT SOLDER TYPE FOR PCB 1.6mm
				engr	ALIAS BABU	2015/01/06	dwg no
				chr	MITHUN PAUL	2015/01/06	sheet 1 of 1
				appd	BIJU K PAUL	2015/01/06	size
sheet	revision	E					A3
index	sheet	1					type
							Product Customer Drawing