

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[FCI](#)

[D15P13A6PV00LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

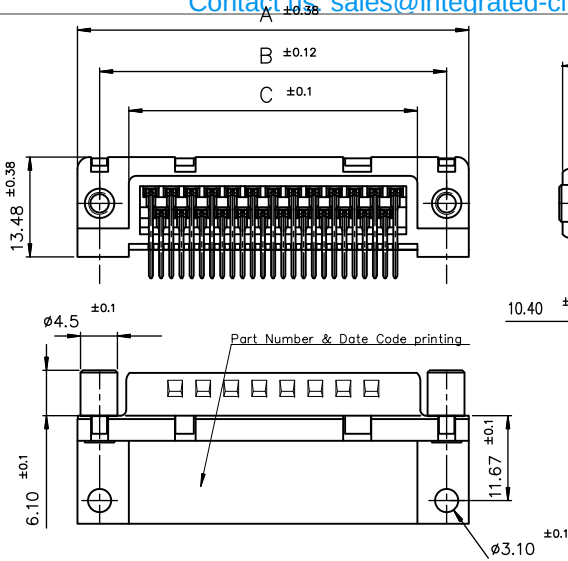

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	G±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	5.90	10.96	D09P13A*PV00LF
15	39.14	33.32	25.18	25.12	5.90	19.18	D15P13A*PV00LF
25	53.03	47.04	39.12	38.84	5.70	33.12	D25P13A*PV00LF
37	69.32	63.50	55.68	55.30	5.70	49.68	D37P13A*PV00LF

REQUIREMENTS

Technical characteristics:

Shell: steel tin/Zinc Cr3 plated
Insulators: self-extinguishing thermoplastic, UL class 94V0
Contacts size 20: brass, gold on mating end, bright tin on termination end over nickel on entire contact
Cycles : 500 for plating 6
Cycles : 200 for plating 4
Screwlock: brass, tin plated

Electrical characteristics:

max. current rating: 5A
Test voltage: 1000V
Rated voltage: 300V
Contact resistance: ≤15mΩ
Shell resistance: ≤5mΩ
Insulation resistance: ≥5000MΩ


Climatic characteristics:

Operating temperature range: -55°C +125°C

Dimensions:

in accordance with MIL-C-24308

Plating: 4 --> Flash Au
Plating: 6 --> 0.76μ Au

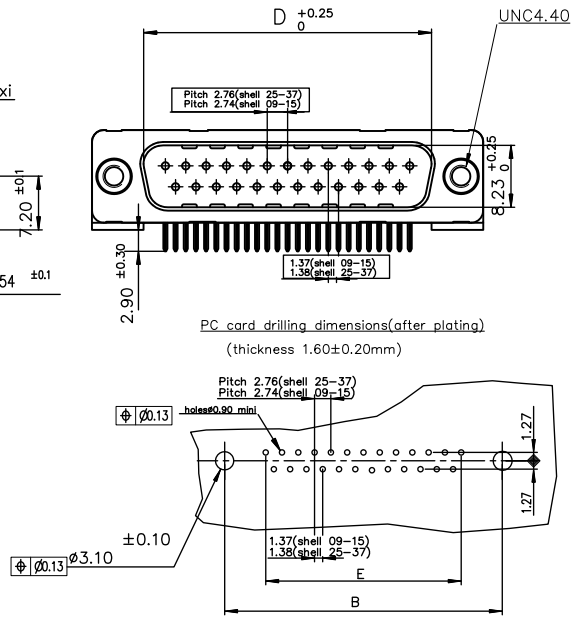

For RoHS Details, Refer Drawing Number C01-8646-0000

mat'l. code	surface	tolerance	projection	product family
ISO 1902	ISO 486	ISO 1101		D-SUB
ltr	ecn no	dr	date	tolerances unless otherwise specified
D	BX-I-21807	AB	2015-08-31	angles
				linear
				0°±2°
				linear
				0.00±0.1
				scale 2:1
dr	JOHN SLEEBA	1996-09-10		
engr	ALIAS BABU	2015-08-31		
chr	MITHUN PAUL	2015-08-31		
ppd	BIJU K PAUL	2015-08-31		
sheet index	revision sheet	D	1	

title
DELTA-D MALE RIGHT ANGLE WITH FEMALE SCREW

dwg no
C01-8646-0484

type
Product Customer Drawing

PDS: Rev :D

STATUS:Released

Printed: Sep 01, 2015