Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

NXP Semiconductors/Freescale Semiconductor, Inc. BT137S-600D,118

For any questions, you can email us directly: sales@integrated-circuit.com

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com



Product data sheet

1. General description

Planar passivated very sensitive gate four quadrant triac in a SOT428 (DPAK) surface-mountable plastic package intended for use in general purpose bidirectional switching and phase control applications, where high sensitivity is required in all four quadrants. This very sensitive gate "series D" triac is intended to be interfaced directly to microcontrollers, logic integrated circuits and other low power gate trigger circuits.

2. Features and benefits

- Direct triggering from low power drivers and logic ICs
- High blocking voltage capability
- Low holding current for low current loads and lowest EMI at commutation
- Planar passivated for voltage ruggedness and reliability
- Surface-mountable package
- Triggering in all four quadrants
- Very sensitive gate

3. Applications

- General purpose motor control
- General purpose switching

4. Quick reference data

Table 1. Quick reference data

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
V_{DRM}	repetitive peak off- state voltage			-	-	600	V
I _{TSM}	non-repetitive peak on- state current	full sine wave; $T_{j(init)} = 25 \text{ °C}$; $t_p = 20 \text{ ms}$; Fig. 4; Fig. 5		-	-	65	A
I _{T(RMS)}	RMS on-state current	full sine wave; $T_{mb} \le 102 ^{\circ}\text{C}$; Fig. 1; Fig. 2; Fig. 3		-	-	8	A
Static charact	eristics		•				,
I _{GT}	gate trigger current	$V_D = 12 \text{ V}; I_T = 0.1 \text{ A}; T2+ G+;$ $T_j = 25 \text{ °C}$		-	2.5	5	mA
		$V_D = 12 \text{ V; } I_T = 0.1 \text{ A; } T2 + G-;$ $T_j = 25 \text{ °C; } Fig. 7$		-	3.5	5	mA







Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

NXP Semiconductors

BT137S-600D

4Q Triac

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
		$V_D = 12 \text{ V; } I_T = 0.1 \text{ A; } T2-\text{ G-;}$ $T_j = 25 \text{ °C; } \underline{\text{Fig. 7}}$	-	3.5	5	mA
		$V_D = 12 \text{ V; } I_T = 0.1 \text{ A; } T2-\text{ G+;}$ $T_j = 25 \text{ °C; } Fig. 7$	-	6.5	10	mA
I _H	holding current	V _D = 12 V; T _j = 25 °C; <u>Fig. 9</u>	-	1.5	10	mA

5. Pinning information

Table 2. Pinning information

Pin	Symbol	Description	Simplified outline	Graphic symbol
1	T1	main terminal 1	mb	T2—T1
2	T2	main terminal 2		Sym051
3	G	gate		ŕ
mb	T2	mounting base; main terminal 2	1 3 DPAK (SOT428)	

6. Ordering information

Table 3. Ordering information

Type number	Package	kage				
	Name	Description	Version			
BT137S-600D	DPAK	plastic single-ended surface-mounted package (DPAK); 3 leads (one lead cropped)	SOT428			

Distributor of NXP Semiconductors/Freescale Semiconductor, Inc.: Excellent Integrated

Datasheet of BT137S-600D,118 - TRIAC SENS GATE 600V 8A DPAK

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

NXP Semiconductors

BT137S-600D

4Q Triac

7. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DRM}	repetitive peak off-state voltage		-	600	V
I _{T(RMS)}	RMS on-state current	full sine wave; $T_{mb} \le 102 \text{ °C}$; Fig. 1; Fig. 2; Fig. 3	-	8	А
I _{TSM}	non-repetitive peak on-state current	full sine wave; $T_{j(init)} = 25 \text{ °C}$; $t_p = 20 \text{ ms}$; Fig. 4; Fig. 5	-	65	Α
		full sine wave; $T_{j(init)} = 25 \text{ °C}$; $t_p = 16.7 \text{ ms}$	-	71	Α
I ² t	I ² t for fusing	t _p = 10 ms; SIN	-	21	A ² s
dl _T /dt	rate of rise of on-state current	I_T = 12 A; I_G = 0.2 A; dI_G/dt = 0.2 A/ μ s; T2+ G+	-	50	A/µs
		I_T = 12 A; I_G = 0.2 A; dI_G/dt = 0.2 A/ μ s; T2+ G-	-	50	A/µs
		I_T = 12 A; I_G = 0.2 A; dI_G/dt = 0.2 A/ μ s; T2- G-	-	50	A/µs
		I_T = 12 A; I_G = 0.2 A; dI_G/dt = 0.2 A/ μ s; T2- G+	-	10	A/µs
I _{GM}	peak gate current		-	2	Α
P _{GM}	peak gate power		-	5	W
P _{G(AV)}	average gate power	over any 20 ms period	-	0.5	W
T _{stg}	storage temperature		-40	150	°C
Tj	junction temperature		-	125	°C

Product data sheet 12 June 2014 3 / 13

Datasheet of BT137S-600D,118 - TRIAC SENS GATE 600V 8A DPAK

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

NXP Semiconductors

BT137S-600D

4Q Triac






Fig. 1. RMS on-state current as a function of mounting base temperature; maximum values



f = 50 Hz $T_{mb} \le 102 \, ^{\circ}C$

Fig. 2. RMS on-state current as a function of surge duration; maximum values

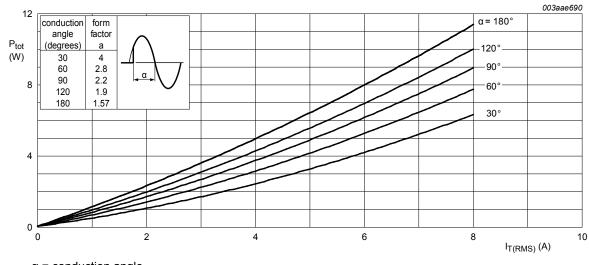

 α = conduction angle


 $a = form factor = I_{T(RMS)}/I_{T(AV)}$

Total power dissipation as a function of RMS on-state current; maximum values Fig. 3.

BT137S-600D

BT137S-600D

4Q Triac

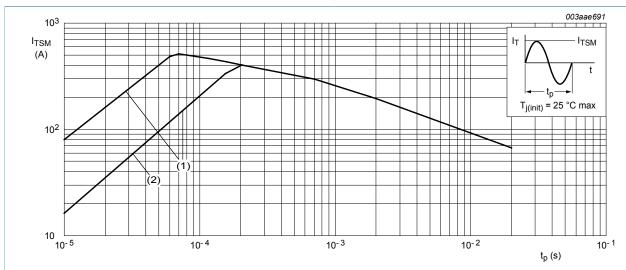

 $t_p \le 20 \text{ ms}$

- (1) dI_T/dt limit
- (2) T2- G+ quadrant limit

Fig. 4. Non-repetitive peak on-state current as a function of pulse width; maximum values

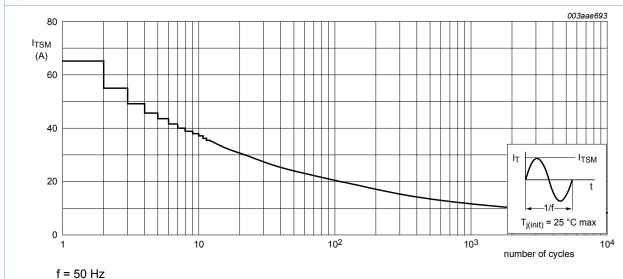


Fig. 5. Non-repetitive peak on-state current as a function of the number of sinusoidal current cycles; maximum values

Datasheet of BT137S-600D,118 - TRIAC SENS GATE 600V 8A DPAK Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

NXP Semiconductors

BT137S-600D

4Q Triac

8. Thermal characteristics

Table 5. Thermal characteristics

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
from junction	thermal resistance	half cycle; Fig. 6	-	-	2.4	K/W
	from junction to mounting base	full cycle; Fig. 6	-	-	2	K/W
R _{th(j-a)}	thermal resistance from junction to ambient	PCB (FR4) mounted; minimum pad sizes	-	75	-	K/W

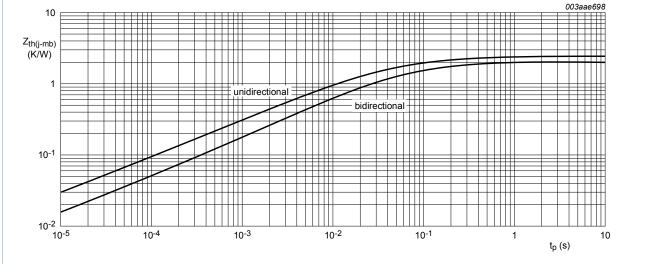


Fig. 6. Transient thermal impedance from junction to mounting base as a function of pulse width



BT137S-600D

4Q Triac


9. Characteristics

Table 6. Characteristics

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Static char	acteristics					
I _{GT}	gate trigger current	$V_D = 12 \text{ V; } I_T = 0.1 \text{ A; } T2+ \text{ G+;}$ $T_j = 25 ^{\circ}\text{C}$	-	2.5	5	mA
		$V_D = 12 \text{ V}; I_T = 0.1 \text{ A}; T2+ \text{ G-};$ $T_j = 25 \text{ °C}; \frac{\text{Fig. 7}}{}$	-	3.5	5	mA
		$V_D = 12 \text{ V}; I_T = 0.1 \text{ A}; T2- \text{G-};$ $T_j = 25 \text{ °C}; \frac{\text{Fig. 7}}{}$	-	3.5	5	mA
		$V_D = 12 \text{ V}; I_T = 0.1 \text{ A}; T2- \text{G+};$ $T_j = 25 \text{ °C}; \frac{\text{Fig. 7}}{}$	-	6.5	10	mA
I _L	latching current	$V_D = 12 \text{ V}; I_G = 0.1 \text{ A}; T2+ G+;$ $T_j = 25 \text{ °C}; Fig. 8$	-	1.6	15	mA
		$V_D = 12 \text{ V; } I_G = 0.1 \text{ A; } T2 + G-;$ $T_j = 25 \text{ °C; } Fig. 8$	-	8.5	20	mA
		$V_D = 12 \text{ V; } I_G = 0.1 \text{ A; } T2\text{- G-;}$ $T_j = 25 \text{ °C; } Fig. 8$	-	1.2	15	mA
		$V_D = 12 \text{ V}; I_G = 0.1 \text{ A}; \text{ T2- G+};$ $T_j = 25 \text{ °C}; \underline{\text{Fig. 8}}$	-	2.5	20	mA
I _H	holding current	V _D = 12 V; T _j = 25 °C; <u>Fig. 9</u>	-	1.5	10	mA
V _T	on-state voltage	I _T = 10 A; T _j = 25 °C; <u>Fig. 10</u>	-	1.3	1.65	V
V_{GT}	gate trigger voltage	$V_D = 12 \text{ V}; I_T = 0.1 \text{ A}; T_j = 25 \text{ °C};$ Fig. 11	-	0.7	1	V
		$V_D = 400 \text{ V}; I_T = 0.1 \text{ A}; T_j = 125 \text{ °C};$ Fig. 11	0.25	0.4	-	V
I _D	off-state current	V _D = 600 V; T _j = 125 °C	-	0.1	0.5	mA
Dynamic cl	haracteristics		l l	-		
dV _D /dt	rate of rise of off-state voltage	V_{DM} = 402 V; T_j = 125 °C; R_{GT1} = 1 kΩ; (V_{DM} = 67% of V_{DRM}); exponential waveform	-	5	-	V/µs
t _{gt}	gate-controlled turn-on time	I_{TM} = 12 A; V_D = 600 V; I_G = 0.1 A; $dI_G/$ dt = 5 A/ μ s	-	2	-	μs

BT137S-600D

4Q Triac



- (1) T2- G+
- (2) T2- G-
- (3) T2+ G-
- (4) T2+ G+

Fig. 7. Normalized gate trigger current as a function of junction temperature




Fig. 8. Normalized latching current as a function of junction temperature





Fig. 9. Normalized holding current as a function of junction temperature



- $V_0 = 1.264 \text{ V}$
- $R_s = 0.038 \Omega$
- (1) T_i = 125 °C; typical values
- (2) T_i = 125 °C; maximum values
- (3) T_i = 25 °C; maximum values

Fig. 10. On-state current as a function of on-state voltage

BT137S-600D



BT137S-600D

4Q Triac

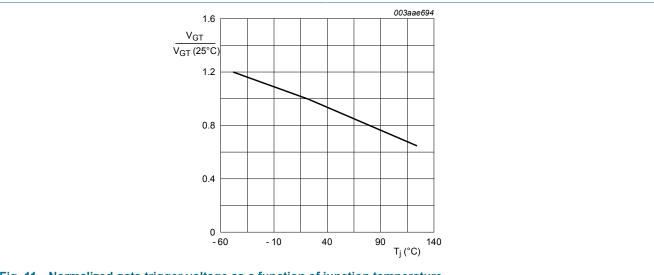


Fig. 11. Normalized gate trigger voltage as a function of junction temperature



BT137S-600D

4Q Triac

10. Package outline

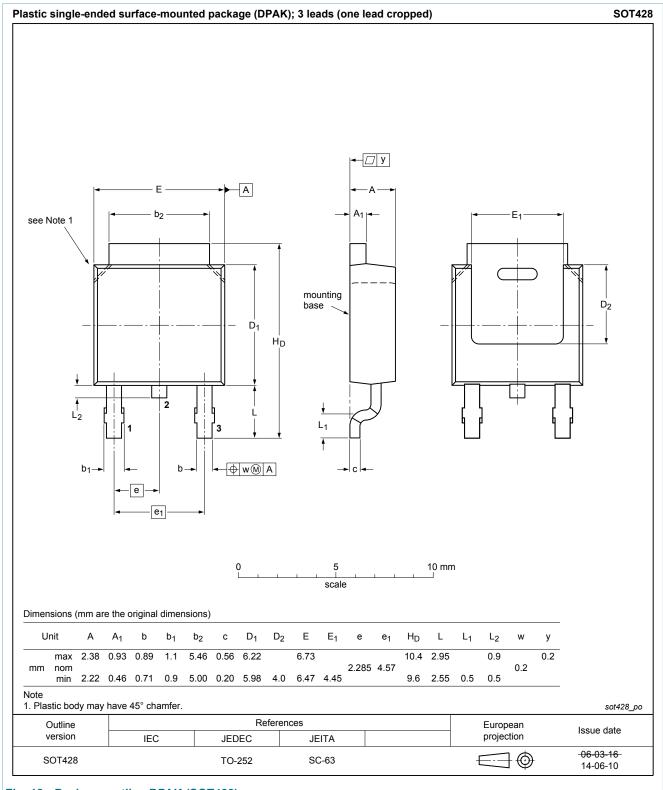


Fig. 12. Package outline DPAK (SOT428)

BT137S-600D All information provided in this document is subject to legal disclaimers.

© NXP Semiconductors N.V. 2014. All rights reserved

Distributor of NXP Semiconductors/Freescale Semiconductor, Inc.: Excellent Integrated

Datasheet of BT137S-600D,118 - TRIAC SENS GATE 600V 8A DPAK

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

NXP Semiconductors

BT137S-600D

4Q Triac

11. Legal information

11.1 Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- The term 'short data sheet' is explained in section "Definitions".
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com

11.2 Definitions

Preview — The document is a preview version only. The document is still subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

11.3 Disclaimers

BT137S-600D

Limited warranty and liability - Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted

© NXP Semiconductors N.V. 2014. All rights reserved

or construed as an offer to sell products that is open for acceptance or the

All information provided in this document is subject to legal disclaimers. **Product data sheet** 12 June 2014 11 / 13

Distributor of NXP Semiconductors/Freescale Semiconductor, Inc. : Excellent Integrated

Datasheet of BT137S-600D,118 - TRIAC SENS GATE 600V 8A DPAK Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

NXP Semiconductors

BT137S-600D

4Q Triac

grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

11.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Adelante, Bitport, Bitsound, CoolFlux, CoReUse, DESFire, EZ-HV, FabKey, GreenChip, HiPerSmart, HITAG, I²C-bus logo, ICODE, I-CODE, ITEC, Labelution, MIFARE, MIFARE Plus, MIFARE Ultralight, MoReUse, QLPAK, Silicon Tuner, SiliconMAX, SmartXA, STARplug, TOPFET, TrenchMOS, TriMedia and UCODE — are trademarks of NXP Semiconductors N.V.

 ${\bf HD}$ ${\bf Radio}$ and ${\bf HD}$ ${\bf Radio}$ logo — are trademarks of iBiquity Digital Corporation.

Distributor of NXP Semiconductors/Freescale Semiconductor, Inc. : Excellent Integrated

Datasheet of BT137S-600D,118 - TRIAC SENS GATE 600V 8A DPAK

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

NXP Semiconductors

BT137S-600D

4Q Triac

12. Contents

1	General description	1
2	Features and benefits	1
3	Applications	1
4	Quick reference data	1
5	Pinning information	2
6	Ordering information	2
7	Limiting values	3
8	Thermal characteristics	6
9	Characteristics	7
10	Package outline	10
11	Legal information	
11.1	Data sheet status	11
11.2	Definitions	
11.3	Disclaimers	11
11.4	Trademarks	12

© NXP Semiconductors N.V. 2014. All rights reserved

For more information, please visit: http://www.nxp.com For sales office addresses, please send an email to: salesaddresses@nxp.com Date of release: 12 June 2014

13 / 13