



Distributor of FCI: Excellent Integrated System Limited

Datasheet of D50P91C4PX00LF - D-Sub Connector Plug, Male Pins 50 Position Through Hole Press-Fit

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[FCI](#)

[D50P91C4PX00LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

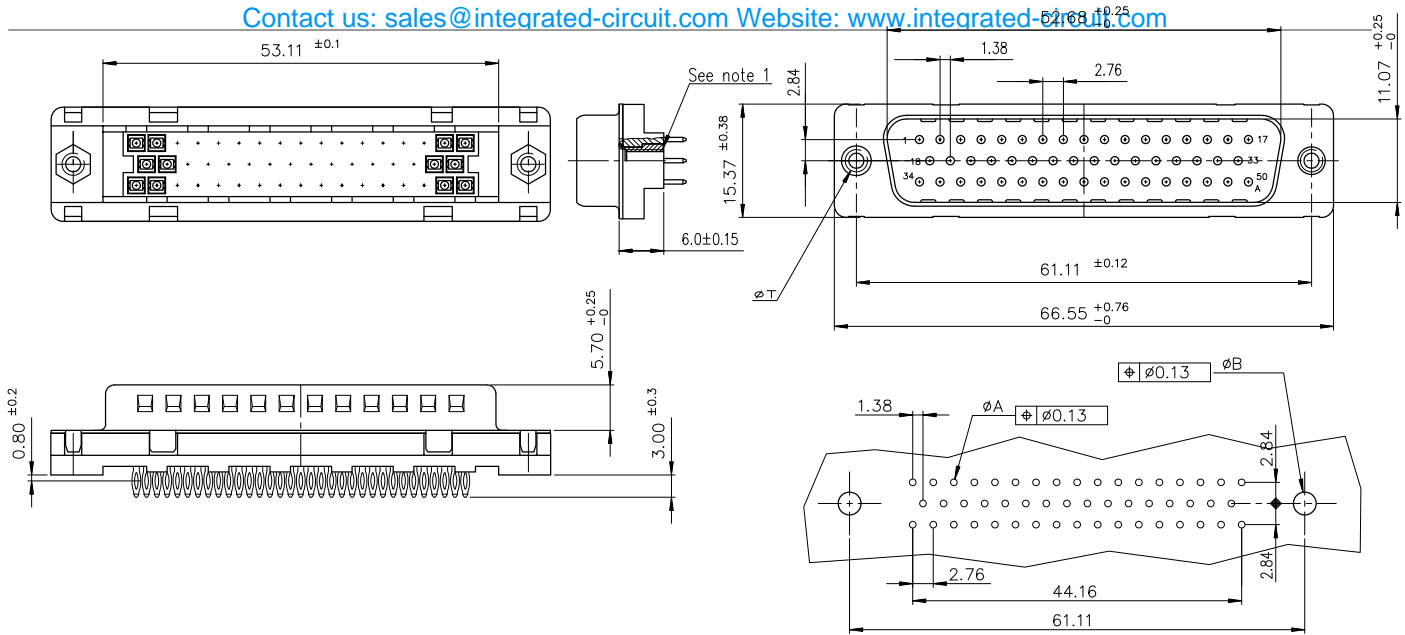

PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50P91C4P*00LF
0.76μ gold	D50P91C6P*00LF

Threaded ØT M3 = L
Threaded ØT 4.40 = X

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

Notes:

- 1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6.0±0.15 mm.

mat'l. code	surface	tolerance	projection	product family
	ISO 1302	ISO 406 ISO 1101	MM	D-SUB
lfr	ecn no	dr	date	title
E	ELX-I-22878	AB	2015/01/06	MALE CONNECTOR DELTA-D STRAIGHT - PRESS FIT
		angles	linear	scale: 2:1
		0°±2'	.0±0.1 .00±0.1 .000±0.1	MM
dr	PESSON	1996/07/24		dwg no
enfr	ALIAS BABU	2015/01/06		sheef 1 of 1
chr	MITHUN PAUL	2015/01/06		size
appd	BIJU K PAUL	2015/01/06		A3
sheet index	revision sheet	E	1	type
				Product Customer Drawing