





Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[HM2R10PA5300N9](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

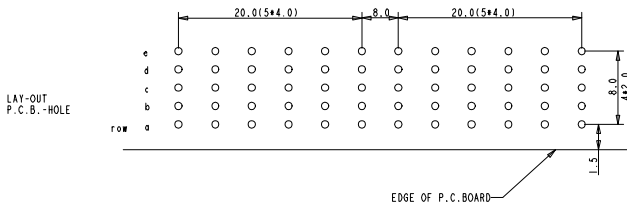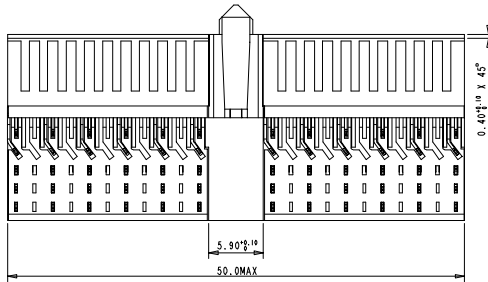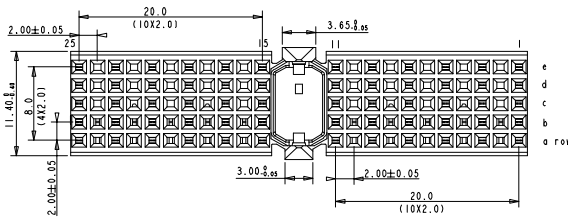

PERFORMANCE CHARACTERISTICS

CURRENT RATING: 1.5 A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE: 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE : 20 mΩ MAX
 INSERTION FORCE: 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN /CONT
 INSULATION RESISTANCE: 10⁹Ω MIN

NOTES: LEAD FREE INDICATOR : LF-LEAD FREE

- PERFORMANCE LEVEL INDICATOR (REF DWG NO. BS.C.201844.003)
- THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material		Spec ref	
Mat code	Heatreat	tolerance	projection
Plating/Finish		1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1° HOEKEN	MM
Dr	24 9 96	W.Panid	size
Eng		Product family	MILLIPACS
Chr		Model Name	ECN
Appr		Model Revision	REL Level
FCI		MILLIPACS 90 LOADING PATTERN RIGHT ANGLE FEMALE	BSC202468002
Pro/E file	CAT.NO. HM2R10PA5300----	CUSTOMER DRAWING	sheet 1 of 1

REV	ech no	dr	date
A	CONVERSION REVISION 00	14-9-01	
B	DG05-0278	Ksuz02-08-05	
C	DG10-0110	NZ 05/30/10	
-	-	-	-
-	-	-	-
-	-	-	-