

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[95609-034LF](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

PRODUCT NUMBER


95609-XXXLF

PLATING

- 0 = 0.20µm Au/GXT
- 1 = 0.76µm Au/GXT
- 3 = 0.38µm Au/GXT
- 5 = 0.38µm GXT
- 6 = 0.76µm GXT




RoHS COMPATIBLE, SEE NOTE 6
TOTAL NB OF POSITIONS, 08 TO 34

1.27µm Ni MIN UNDERPLATING

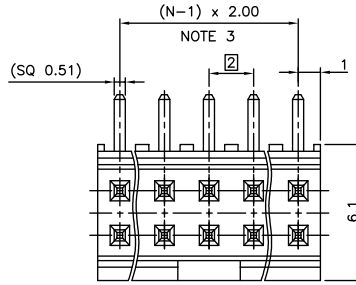

NOTES:

1. MATERIAL HOUSING: HIGH TEMP. THERMOPLASTIC
UL 94V-0, COLOR CREAM
2. MATERIAL TERMINAL: COPPER ALLOY
3. TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS PER ROW
4. 7N MIN. PIN RETENTION IN EITHER DIRECTION.
5. STANDARD PACKAGING IN POLYBAGS.
6. RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - b - LABELLING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - c - THIS PRODUCT MEETS EUROPEAN DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DISCRIBED IN GS-47-0004

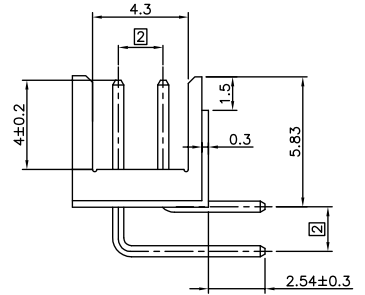

mat'l. code	surface	tolerance	projection	product family
SEE NOTES	ISO 1302 ✓	ISO 406 ISO	1101	MINITEK HEADER
ltr ecn no dr date	tolerances unless otherwise specified	mm		title
C F05-0128 LMU 05.02.21	angled linear .X ±0.3	mm		SHR HEADER
D F06-0210 LMU 06.07.04	.XX ±0.13	scale 7:1		2.00mm TMT R/A
E F08-0143 ELA 15.04.08	±2° .XXX ±0.05	FCI		dwg no
F B-19190 LMU 14.10.24	dr L.MULIN 02.06.19	sheet 1 of 1		size
G F-21746 AMA 15.08.21	engr J.COMPAGNON 02.06.19	95609		A3
chr	app JMC 02.06.19	type		CUSTOMER Drawing
sheet index	revision sheet			