

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[2450LP15A050E](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

“High Frequency Ceramic Solutions”

2.4 GHz Low Pass Filter

Detail Specification

P/N 2450LP15A050



Page 1 of 2

Part Number	Frequency (MHz)	Insertion Loss	Attenuation (min.)	Return Loss
2450LP15A050_	2400 - 2500	0.5 dB max.	27 dB @ $2 \times f_0$ 25 dB @ $3 \times f_0$ 25 dB @ $4 \times f_0$	10.0 dB min.

Input Power	Impedance	Operating Temperature Range
1 Watt max	50 Ω	-40 to +85°C


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 ± .004	0.049 ± .004	0.034 ± .004	0.012 ± .004	0.008 ± .004	0.012 ± .004/-0.008	0.014 ± .004	0.026 ± .002
mm	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.30 ± 0.1	0.20 ± 0.1	0.30 ± 0.1/-0.2	0.35 ± 0.1	0.65 ± 0.05




Terminal Configuration

No.	Function	No.	Function
1	GND	5	GND
2	NC	6	NC
3	GND	7	GND
4	OUT	8	IN



Mounting Considerations

- Mount these devices with brown mark facing up.
- Line width should be designed to provide 50 Ω impedance matching

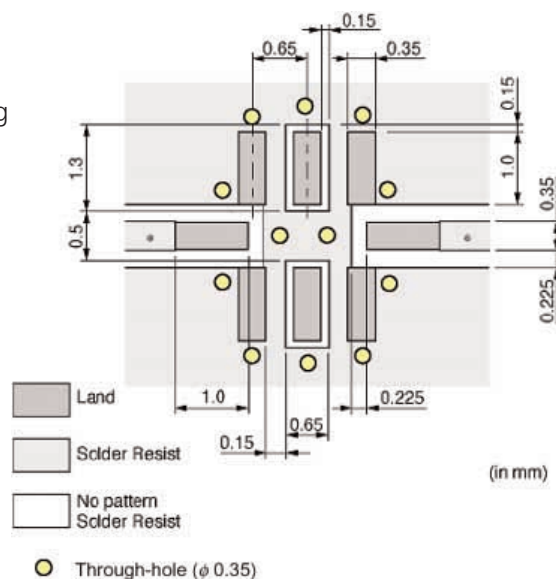

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


2.4 GHz Low Pass Filter

Detail Specification

P/N 2450LP15A050

Page 2 of 2

Typical Insertion Loss / Return Loss

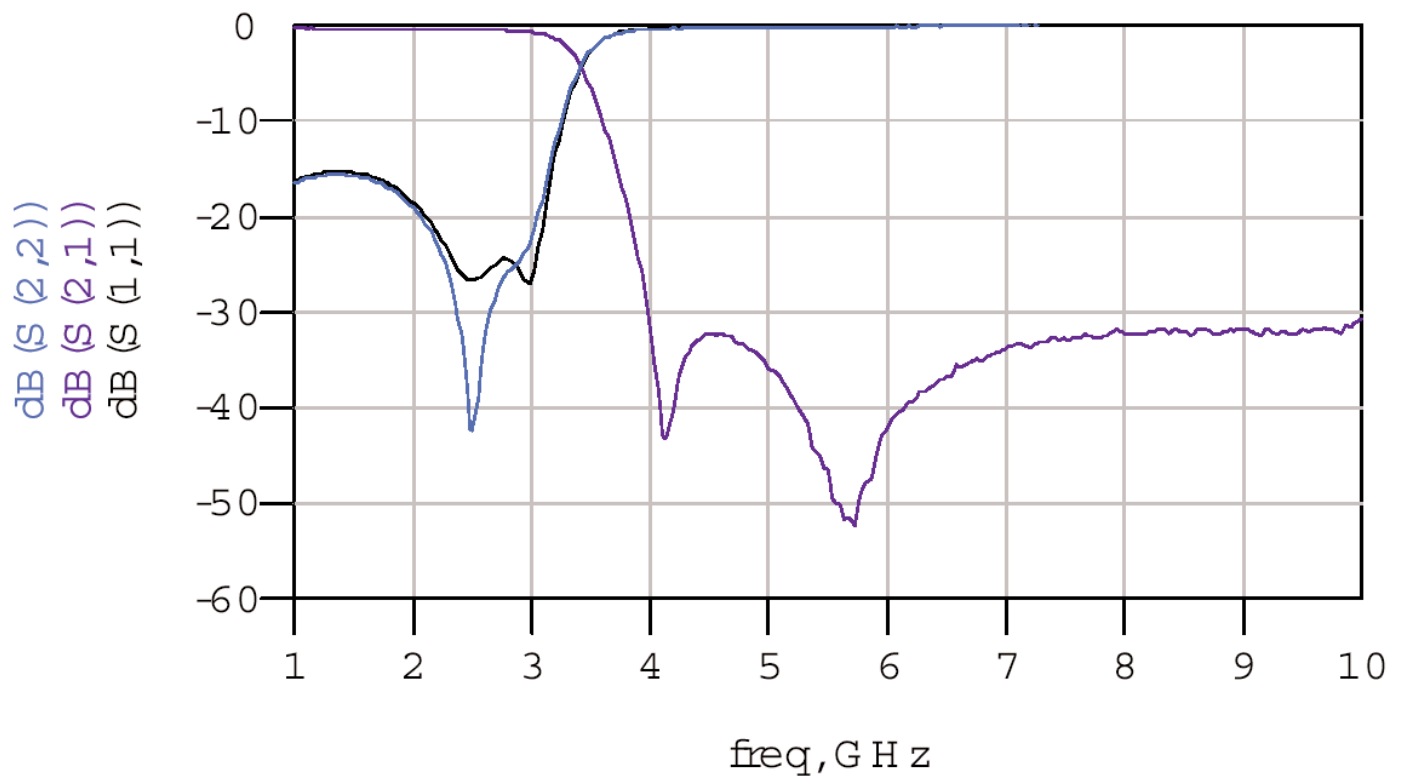

Delivery

Packaged in embossed tape on 7" reels (4000 / reel)
Standard delivery is eight weeks or sooner ARO