

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[1810BP07C200T](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

"High Frequency Ceramic Solutions"

1810 MHz Band Pass Filter **P/N 1810BP07C200**
 Detail Specification: 06/21/06 Page 1 of 2

General Specifications

Part Number	1810BP07C200
Frequency (MHz)	1710 - 1910
Insertion Loss	2.0 dB max.
Return Loss	9.5 dB min.
Attenuation (min.)	20 dB @ 855 - 955 MHz
Attenuation (min.)	10 dB @ 2565 - 2865 MHz


Impedance	50 Ω
Input Power	500 mW max.
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Reel Quantity	10,000

P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 1810BP07C200S
		T & R	Suffix = E	Eg. 1810BP07C200E
	Termination Style	100% Tin	Suffix = None	Eg. 1810BP07C200(E or S)
		Tin / Lead	Suffix = /Pb	Eg. 1810BP07C200(E or S)00P

Terminal Configuration	
No.	Function
1	GND
2	OUT
3	GND
4	IN

Mechanical Dimensions

	In	mm	
L	0.039 ± 0.002	1.00 ± 0.05	
W	0.020 ± 0.002	0.50 ± 0.05	
T	0.015 ± 0.002	0.38 ± 0.05	
a	0.006 ± 0.004	0.15 ± 0.10	
b	0.010 ± 0.004	0.25 ± 0.10	



Mounting Considerations

Mount these devices with brown mark facing up.
 * Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness


Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"

1810 MHz Band Pass Filter **P/N 1810BP07B200**
Detail Specification: 06/21/06 Page 2 of 2

Typical Electrical Performance (T=25°C)

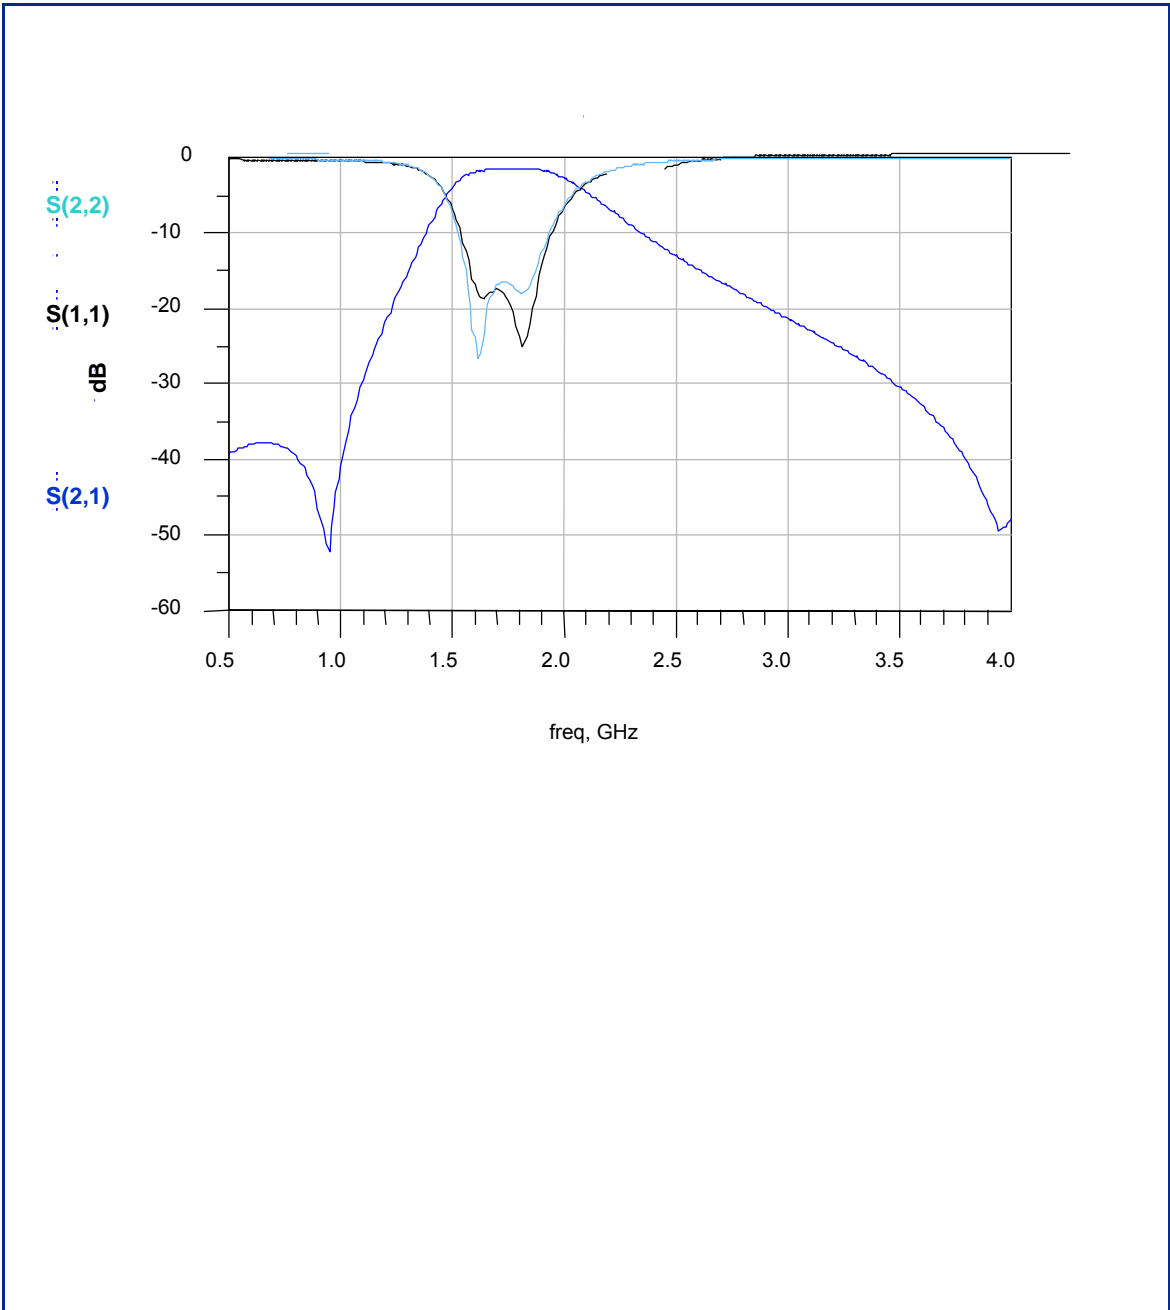

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.