

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[2450BP39D100BE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

"High Frequency Ceramic Solutions"

2.45 GHz Band Pass Filter **P/N 2450BP39D100B**
 Detail Specification: 10/18/05 Page 1 of 2

General Specifications

Part Number	2450BP39D100B
Frequency (MHz)	2400 - 2500
Insertion Loss	2.5 dB max.
Return Loss	9.5 dB min.
Attenuation (min.)	35 dB @ 880 - 915 MHz
Attenuation (min.)	18 dB @ 1710 - 1990 Mhz
Attenuation (min.)	12 dB @ 2100 MHz
Attenuation (min.)	35 dB @ 3200 MHz
Attenuation (min.)	22 dB @ 4800 - 5000 MHz
Attenuation (min.)	22 dB @ 7200 - 7500 MHz

Impedance	50 Ω
Input Power	500 mW max.
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Reel Quantity	3,000

Termination Style	AgPt	Suffix = "None"	eg. 2450BP39D100B
	Tin / Lead	Suffix = "/Pb"	eg. 2450BP39D100B/Pb

Terminal Configuration	
No.	Function
1	GND
2	OUT
3	GND
4	IN

Mechanical Dimensions

	In	mm	Diagram	
L	0.098 ± 0.008	2.50 ± 0.20		
W	0.079 ± 0.008	2.00 ± 0.20		
T	0.037 ± 0.004	0.95 ± 0.10		
a	0.012 ± 0.008	0.30 ± 0.20		
b	0.024 ± 0.008	0.60 ± 0.20		
c	0.012 ± 0.008	0.30 ± 0.20		

Mounting Considerations

Mount these devices with brown mark facing up.
 * Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


2.45 GHz Band Pass Filter

P/N 2450BP39D100B

Detail Specification: 10/18/05

Page 2 of 2

Typical Electrical Performance (T=25°C)

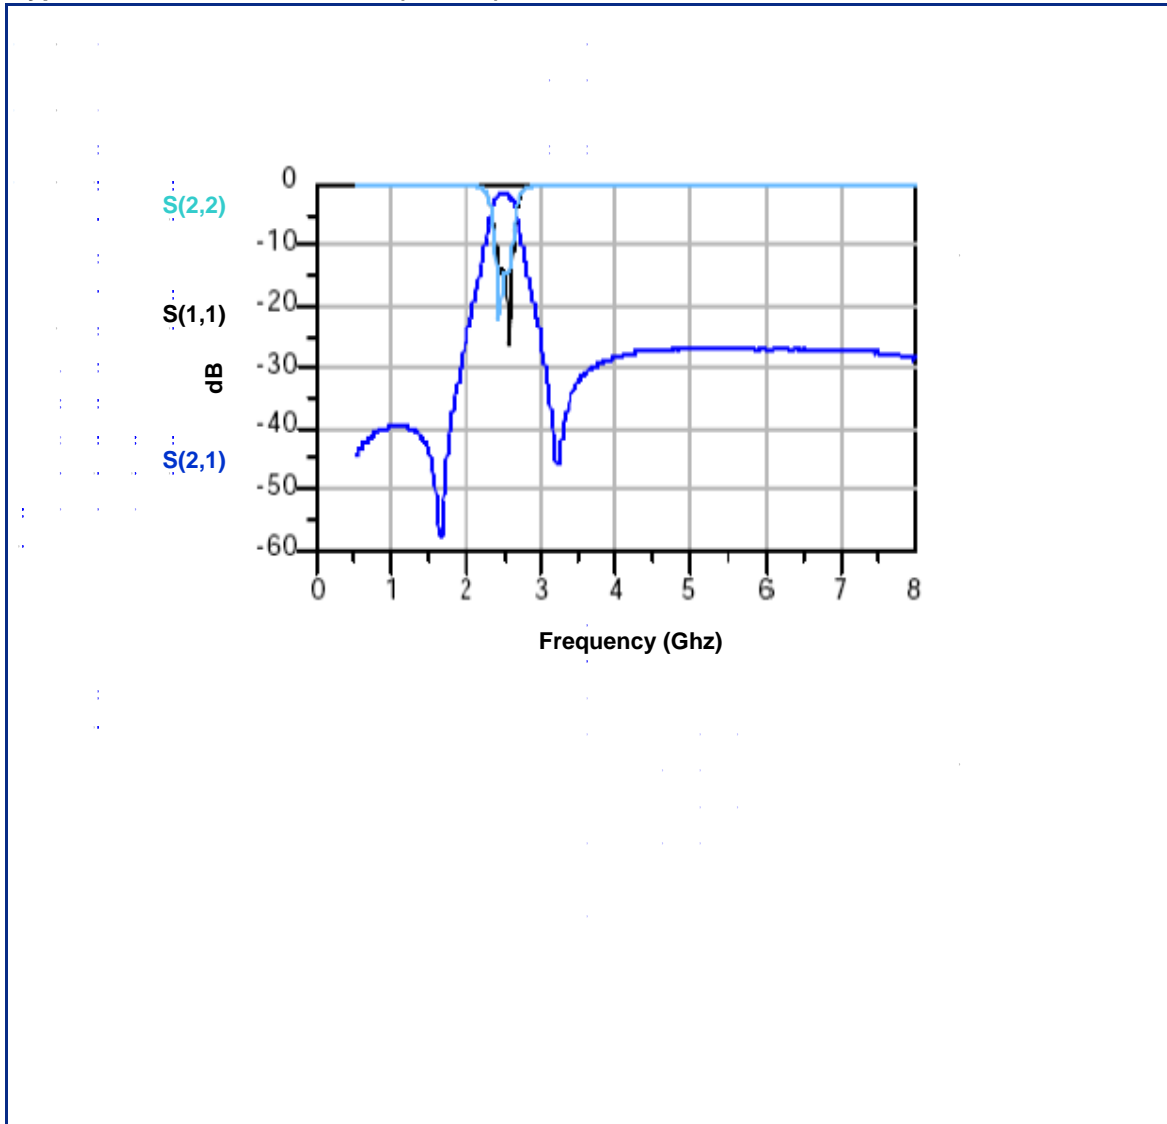

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.