

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[STMicroelectronics](#)
[HCF4097M013TR](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



HCF4097B

ANALOG DIFFERENTIAL 8 CHANNEL MULTIPLEXER/DEMULTIPLEXER

- LOW ON RESISTANCE : 125Ω (Typ.) OVER 15V p-p SIGNAL INPUT RANGE FOR $V_{DD} - V_{SS} = 15V$
- HIGH OFF RESISTANCE : CHANNEL LEAKAGE OF 10pA (Typ.) at $V_{DD} - V_{SS} = 10V$
- MATCHED SWITCH CHARACTERISTICS : $\Delta R_{ON} = 5\Omega$ (Typ.) FOR $V_{DD} - V_{SS} = 15V$
- VERY LOW QUIESCENT POWER DISSIPATION UNDER A DIGITAL CONTROL INPUT AND SUPPLY CONDITIONS : $0.2\mu\text{W}$ (Typ.) at $V_{DD} - V_{SS} = 10V$
- BINARY ADDRESS DECODING ON CHIP
- QUIESCENT CURRENT SPECIFIED UP TO 20V
- STANDARDIZED SYMMETRICAL OUTPUT CHARACTERISTICS
- 5V, 10V AND 15V PARAMETRIC RATINGS
- INPUT LEAKAGE CURRENT $I_I = 100\text{nA}$ (MAX) AT $V_{DD} = 18V$ $T_A = 25^\circ\text{C}$
- 100% TESTED FOR QUIESCENT CURRENT
- MEETS ALL REQUIREMENTS OF JEDEC JESD13B "STANDARD SPECIFICATIONS FOR DESCRIPTION OF B SERIES CMOS DEVICES"

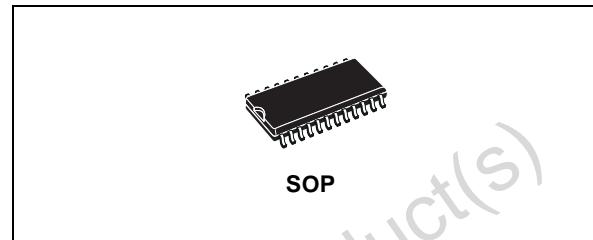

ORDER CODES

PACKAGE	TUBE	T & R
SOP	HCF4097BM1	HCF4097M013TR


HCF4097B, a analog multiplexer/demultiplexer CMOS, is a digitally controlled analog switches device having low ON impedance, low OFF leakage current and internal address decoding. in addition, the ON resistance is relatively constant over the full input-signal range.

HCF4097B is a differential 8-channel multiplexer having three binary control inputs A, B, C, and an inhibit input. The inputs permit selection of one of eight pairs of switches. A logic "1" present at the inhibit input turns all channels off.

DESCRIPTION


HCF4097B is monolithic integrated circuits fabricated in Metal Oxide Semiconductor technology available in SOP package.

PIN CONNECTION

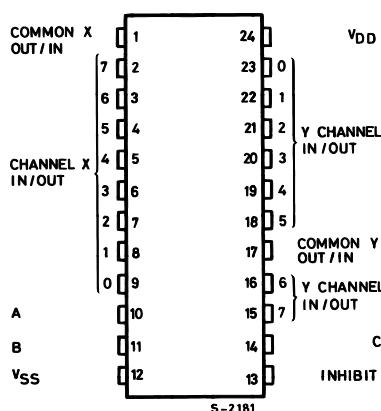

HCF4097B


INPUT EQUIVALENT CIRCUIT

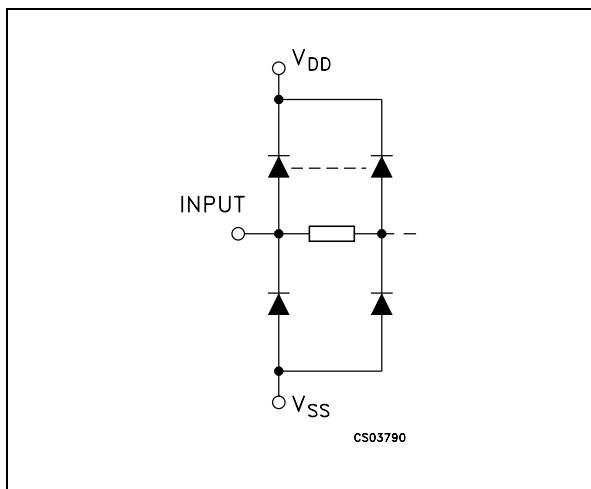

PIN DESCRIPTION

PIN No	SYMBOL	NAME AND FUNCTION
10, 11, 14	A, B, C	Binary Control Inputs
1	COMMON X OUT/IN	Common X Out/In
17	COMMON Y OUT/IN	Common Y Out/In
13	INHIBIT	Inhibit Input
9, 8, 7, 6, 5, 4, 3, 2	0 to 7 CHANNEL IN/OUT X	8 X channel In/Out
23, 22, 21, 20, 19, 18, 16, 15	0 to 7 CHANNEL IN/OUT Y	8 Y channel In/Out
12	V _{SS}	Negative Supply Voltage
24	V _{DD}	Positive Supply Voltage

FUNCTIONAL DIAGRAM

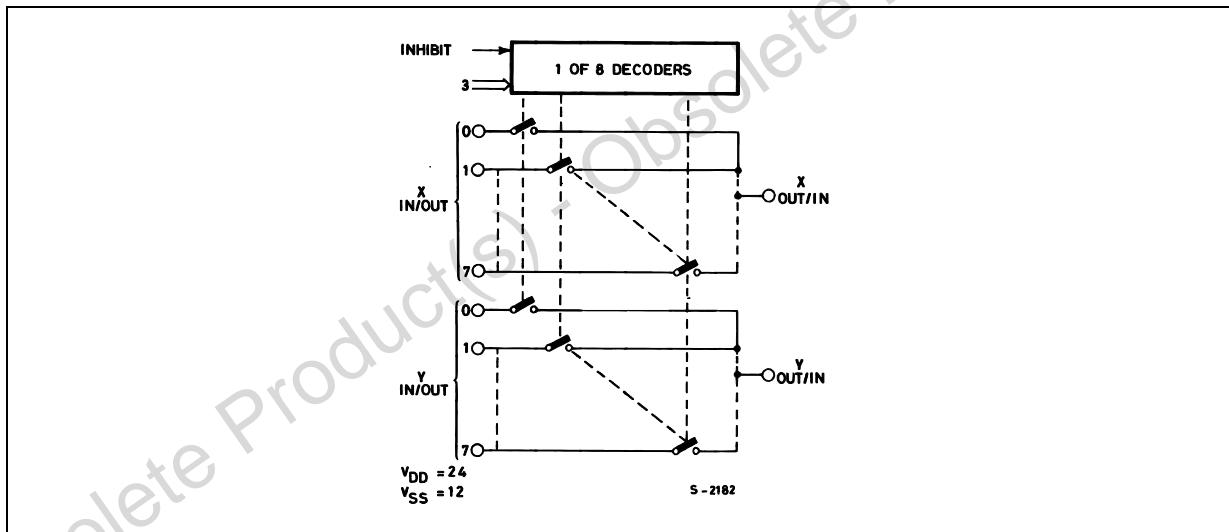


TRUTH TABLE

A	B	C	INH	SELECTED CHANNEL
X	X	X	H	NONE
L	L	L	L	0X 0Y
H	L	L	L	1X 1Y
L	H	L	L	2X 2Y
H	H	L	L	3X 3Y
L	L	H	L	4X 4Y
H	L	H	L	5X 5Y
L	H	H	L	6X 6Y
H	H	H	L	7X 7Y

HCF4097B

LOGIC DIAGRAM

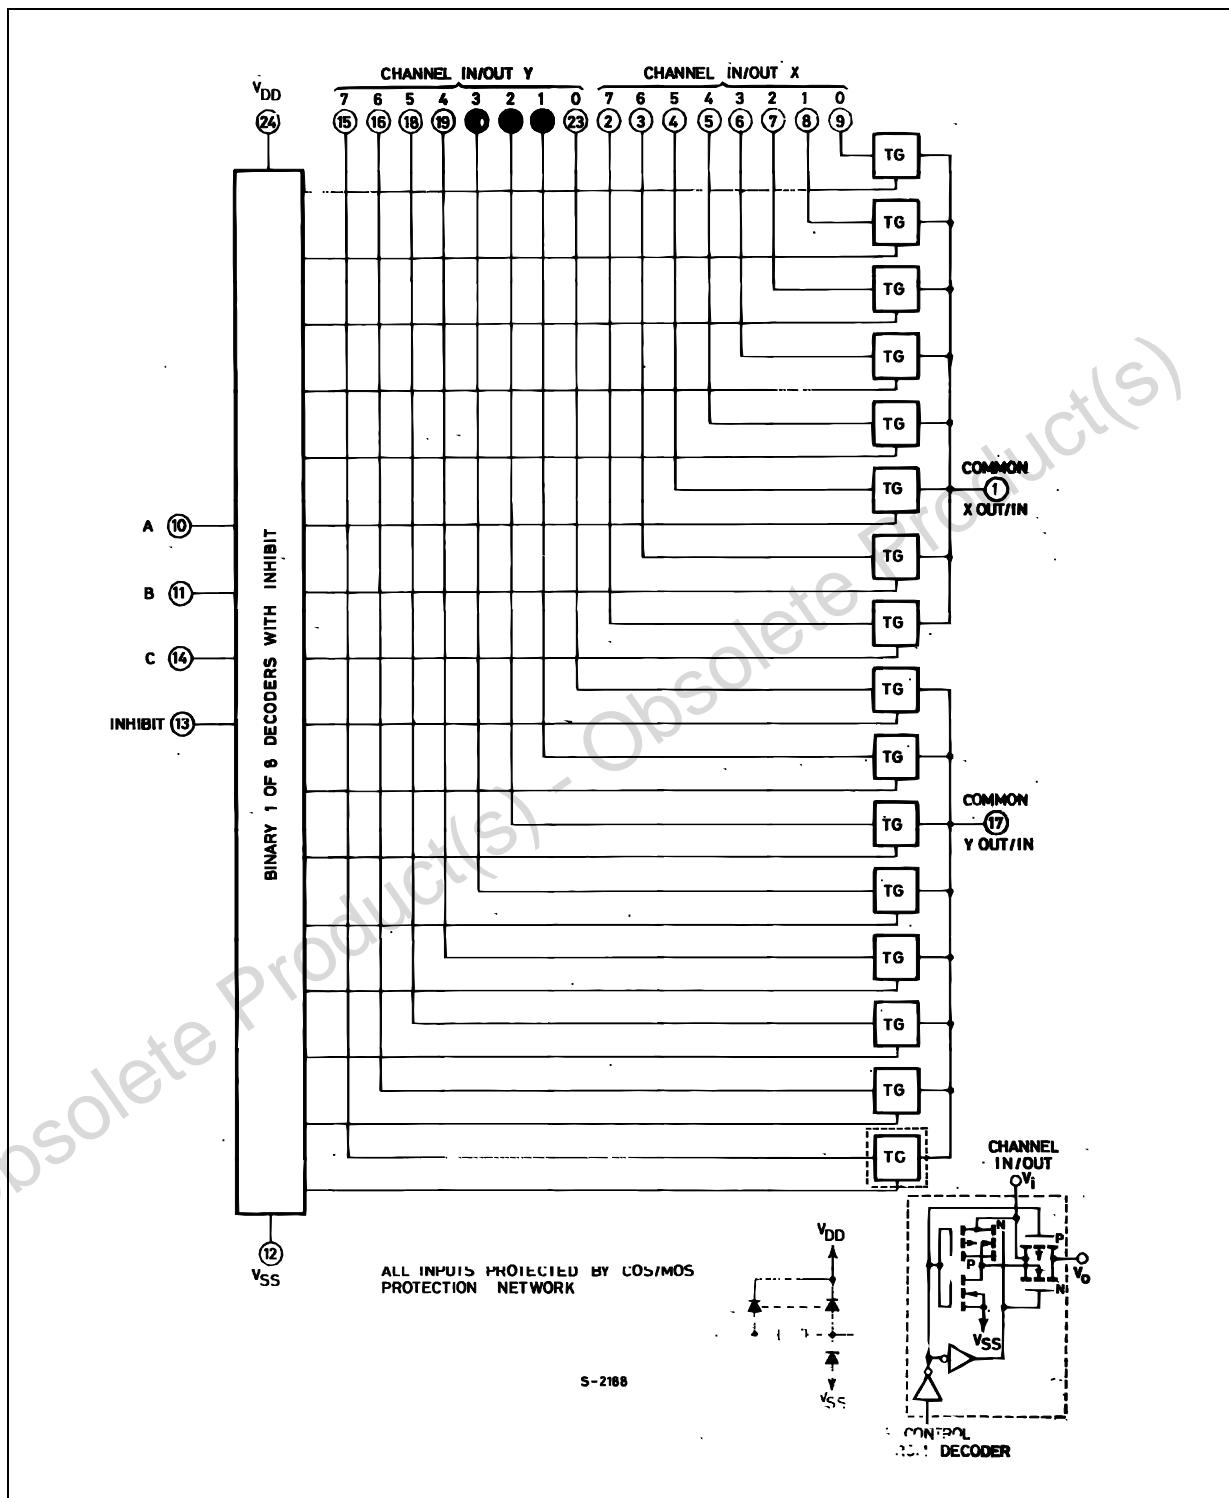

HCF4097B

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{DD}	Supply Voltage	-0.5 to +22	V
V_I	DC Input Voltage	-0.5 to V_{DD} + 0.5	V
I_I	DC Input Current	± 10	mA
P_D	Power Dissipation per Package	200	mW
	Power Dissipation per Output Transistor	100	mW
T_{op}	Operating Temperature	-55 to +125	°C
T_{stg}	Storage Temperature	-65 to +150	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

All voltage values are referred to V_{SS} pin voltage.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Value	Unit
V_{DD}	Supply Voltage	3 to 20	V
V_I	Input Voltage	0 to V_{DD}	V
T_{op}	Operating Temperature	-55 to 125	°C

HCF4097B

STATIC ELECTRICAL CHARACTERISTICS

($T_{amb} = 25^\circ\text{C}$, Typical temperature coefficient for all V_{DD} value is 0.3 %/ $^\circ\text{C}$)

Symbol	Parameter	Test Condition				Value						Unit			
		V_{IS} (V)	V_{EE} (V)	V_{SS} (V)	V_{DD} (V)	$T_A = 25^\circ\text{C}$			-40 to 85°C		-55 to 125°C				
						Min.	Typ.	Max.	Min.	Max.	Min.	Max.			
I_L	Quiescent Supply Current				5		0.04	5		150		150	μA		
					10		0.04	10		300		300			
					15		0.04	20		600		600			
					20		0.08	100		3000		3000			
SWITCH															
R_{ON}	On Resistance	$0 \leq V_I \leq V_{DD}$	0	0	5		470	1050		1200		1200	Ω		
					10		180	400		500		520			
					15		125	240		300		300			
Δ_{ON}	Resistance Δ_{RON} (between any 2 of 4 switches)		0	0	5		10						Ω		
					10		10								
					15		5								
OFF (•)	Channel Leakage Current Any Channel Off		0	0	18		± 0.1	100		1000		1000	μA		
	Channel Leakage Current All Channel Off (Common Out/In)		0	0	18		± 0.1	100		1000		1000			
C	Capacitance Input		-5	5		5							pF		
	Output capacitance					35									
	Feedthrough					0.2									
CONTROL															
V_{IL}	Input Low Voltage	$V_{EE} = V_{SS}$ $R_L = 1\text{K}\Omega$ to V_{SS} V_{DD} thru $1\text{K}\Omega$			5			1.5		1.5		1.5	V		
					10			3		3		3			
					15			4		4		4			
V_{IH}	Input High Voltage	$I_{IS} < 2\mu\text{A}$ (on all OFF channels)			5	3.5		3.5		3.5			V		
					10	7		7		7					
					15	11		11		11					
I_I	Input Leakage Current	$V_I = 0/18\text{V}$			18		$\pm 10^{-3}$	± 0.1		± 1		± 1	μA		
C_I	Input Capacitance	Any Address or Inhibit Input					5	7.5					pF		

The Noise Margin for both "1" and "0" level is: 1V min. with $V_{DD}=5\text{V}$, 2V min. with $V_{DD}=10\text{V}$, 2.5V min. with $V_{DD}=15\text{V}$

• Determined by minimum feasible leakage measurement for automating testing

HCF4097B

DYNAMIC ELECTRICAL CHARACTERISTICS ($T_{amb} = 25^\circ C$, $C_L = 50pF$, $R_L = 200K\Omega$, $t_r = t_f = 20 ns$)

Symbol	Parameter	Test Condition							Value*		Unit
		V_C (V)	R_L (K Ω)	f_I (KHz)	V_I (V)	V_{SS} (V)	V_{DD} (V)		Typ.	Max.	
SWITCH											
t_{pd}	Propagation Delay Time (Signal Input to Output)	$= V_{DD}$	200		0	5 10 15			30	60	ns
	15								30		
	11								20		
	Frequency Response Channel "ON" (Sine Wave Input) at $20 \log \frac{V_O}{V_I} = -3dB$	$= V_{DD}$	1	5 (•)	0	10	V_O at Common Out/In	20		ns	
								60			
	Feedthrough (All channels OFF) at $20 \log \frac{V_O}{V_I} = -40dB$	$= V_{SS}$	1	5 (•)	0	10	V_O at Common Out/In	12		MHz	
								8			
							Between Any two (A and B) Channels	1			
								10			
	Frequency Signal Crosstalk at $20 \log \frac{V_{O(A)}}{V_{I(B)}} = -40dB$	$V_{C(A)} = V_{DD}$ $V_{C(B)} = V_{SS}$	1	5 (•)	0	10		18			
t_W	Sine Wave Distortion ($f_{IS} = 1KHz$ sine wave)	5 10 15	10	1	2 (•) 3 (•) 5 (•)	0	5 10 15	0.3 0.2 0.12		%	
CONTROL (Address or Inhibit)											
t_{PLH}, t_{PHL}	Propagation Delay Time: Address or Inhibit to Signal OUT (Channel Turning ON)		1		0	5 10 15		325	650	ns	
								135	270		
								95	190		
	Propagation Delay Time: Address or Inhibit to Signal OUT (Channel Turning OFF)		0.3		0	5 10 15		220	440	ns	
								90	180		
								65	130		
	Address or Inhibit to Signal Crosstalk		10**		0	10		75		mV peak	

(*) Typical temperature coefficient for all V_{DD} value is 0.3 %/ $^\circ C$

(**) : Both Ends of Channel

(•) : Peak to Peak voltage symmetrical about $(V_{DD} - V_{SS}) / 2$

HCF4097B

APPLICATION INFORMATION

In applications where separate power sources are used to drive V_{DD} and the signal inputs, the V_{DD} current capability should exceed V_{DD}/R_L (R_L = effective external load). This provision avoids permanent current flow or clamp action on the V_{DD} supply when power is applied or removed from the HCF4097B.


When switching from one address to another, some of the ON periods of the channels of the multiplexers will overlap momentarily, which may be objectionable in certain applications. Also, when a channel is turned ON or OFF by an address input, there is a momentary conductive path from the channel to V_{SS} , which will dump some charge from any capacitor connected to the input or output of the channel. The inhibit input turning on a channel will similarly dump some charge to V_{SS} .

The amount of charge dumped is mostly a function of the signal level above V_{SS} . Typically, at $V_{DD} - V_{SS} = 10V$, a 100 pF capacitor connected to

the input or output of the channel will lose 3-4% of its voltage at the moment the channel turns ON or OFF. This loss of voltage is essentially independent of the address or inhibit signal transition time, if the transition time is less than 1-2 ms. When the inhibit signal turns a channel off, there is no change dumping of V_{SS} . Rather, there is a slight rise in the channel voltage level (65 mV typ.) due to the capacitance coupling from inhibit input to channel input or output. Address input also couple some voltage steps onto the channel signal levels.

In certain applications, the external load-resistor current may include both V_{DD} and signal line components. To avoid drawing V_{DD} current when switch current flows into the transmission gate inputs, the voltage drop across the bidirectional switch must not exceed 0.8V (calculated from R_{ON} values shown in ELECTRICAL CHARACTERISTICS CHART). No V_{DD} current will flow through R_L if the switch current flows into terminal 1 on the HCF4097B.



TEST CIRCUIT

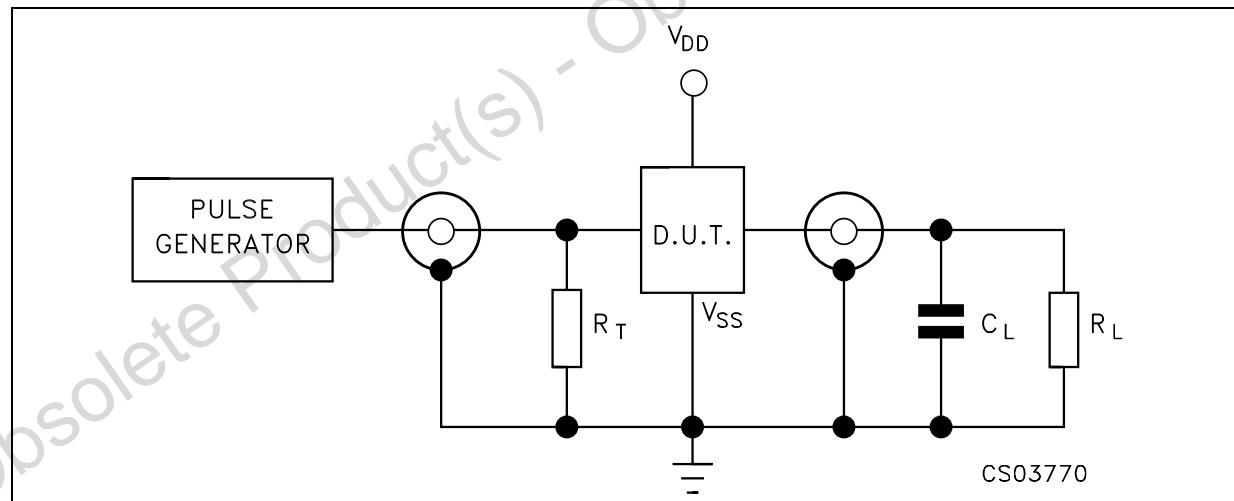

$C_L = 50\text{pF}$ or equivalent (includes jig and probe capacitance)

$R_L = 200\text{K}\Omega$


$R_T = Z_{OUT}$ of pulse generator (typically 50Ω)

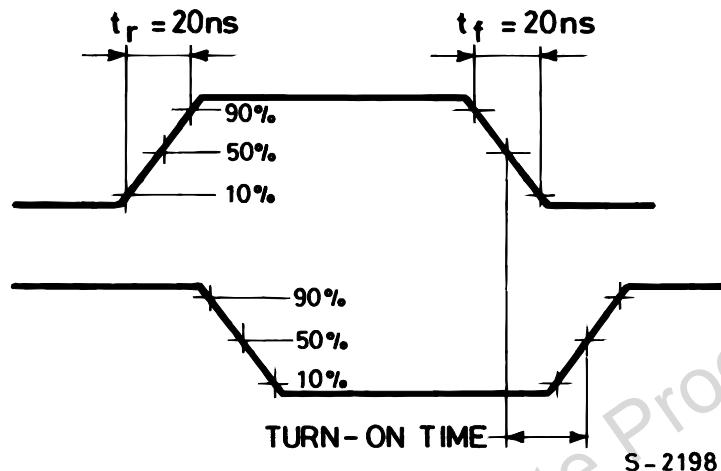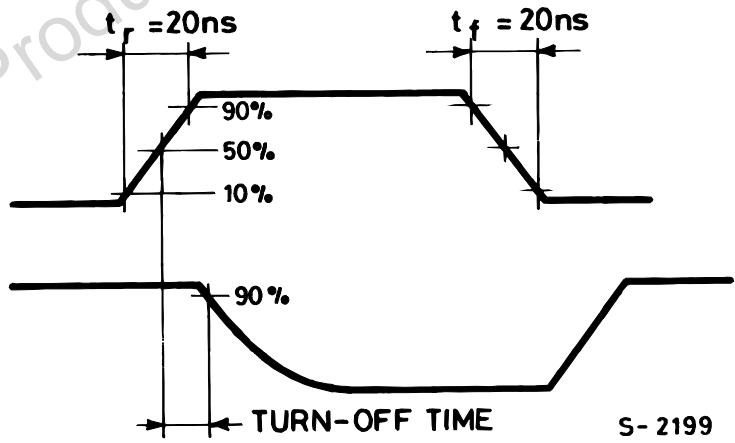HCF4097B**WAVEFORM : PROPAGATION DELAY TIMES (f=1MHz; 50% duty cycle)****WAVEFORM : PROPAGATION DELAY TIMES (f=1MHz; 50% duty cycle)**

HCF4097B

SO-24 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			2.65			0.104
a1	0.1		0.2	0.004		0.008
a2			2.45			0.096
b	0.35		0.49	0.014		0.019
b1	0.23		0.32	0.009		0.012
C		0.5			0.020	
c1	45° (typ.)					
D	15.20		15.60	0.598		0.614
E	10.00		10.65	0.393		0.419
e		1.27			0.050	
e3		13.97			0.550	
F	7.40		7.60	0.291		0.300
L	0.50		1.27	0.020		0.050
S	8° (max.)					

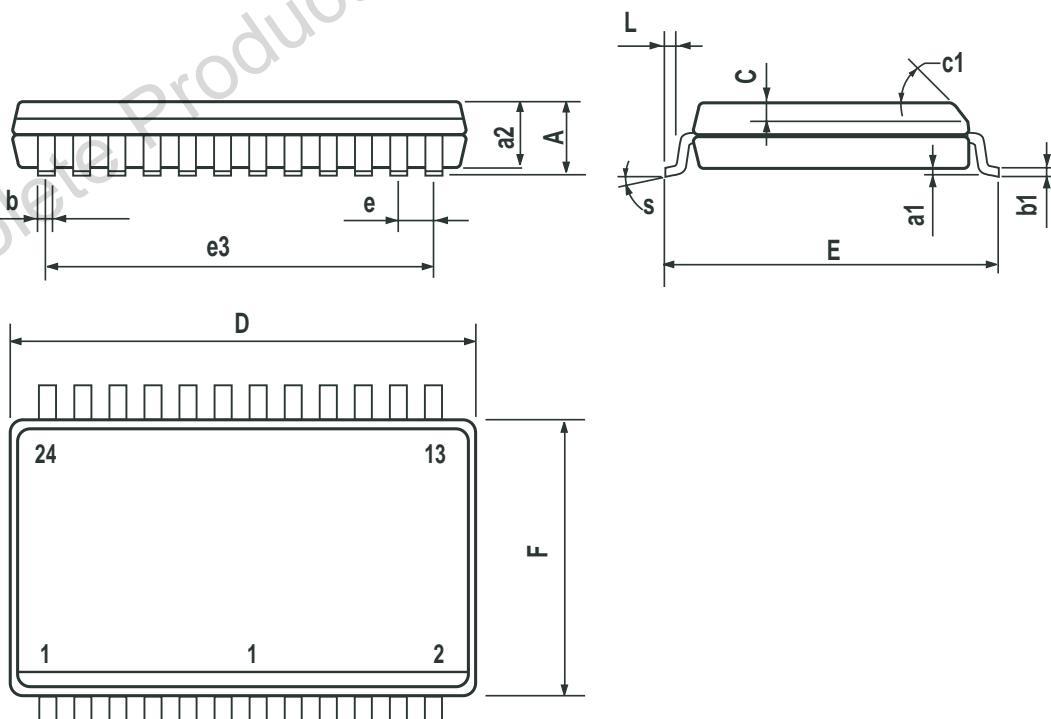

PO13T

HCF4097B

Obsolete Product(s) - Obsolete Product(s)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>