

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[2450CP14A100T](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

"High Frequency Ceramic Solutions"

2450 MHz Directional Coupler **P/N 2450CP14A100**
 Detail Specification: 01/06/06 Page 1 of 2

General Specifications

Part Number	2450CP14A100
Frequency (MHz)	2400 - 2500
Insertion Loss	0.74 dB max.
Return Loss	10.9 dB min.
Coupling	10 ± 1.0 dB
Isolation	22.0 dB min.

Impedance	50 Ω
Input Power	3 Watt max.
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Reel Quantity	4,000

P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 2450CP14A100
		T & R	Suffix = E	Eg. 2450CP14A100
	Termination Style	100% Tin	Suffix = None	Eg. 2450CP14A100(E or S)
		Tin / Lead	Suffix = /Pb	Eg. 2450CP14A100(E or S)/Pb

Terminal Configuration	
No.	Function
1	IN
2	GND
3	Coupled Out
4	Termination
5	GND
6	Main Out

Mechanical Dimensions

	In	mm
L	0.063 ± 0.004	1.60 ± 0.10
W	0.031 ± 0.004	0.80 ± 0.10
T	0.024 ± 0.004	0.60 ± 0.10
a	0.008 ± 0.004	0.20 ± 0.10
b	0.008 +.004/-0.008	0.20 +0.1/-0.15
c	0.006 ± 0.004	0.15 ± 0.10
g	0.012 ± 0.004	0.30 ± 0.10
p	0.020 ± 0.002	0.50 ± 0.05

Mounting Considerations

Mount these devices with brown mark facing up.
 * Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness
 Units: mm


Legend:
 [Grey Box] Solder Resist
 [Black Box] Land
 [Yellow Circle] Through-hole (φ0.3)

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"

2450 MHz Directional Coupler	P/N 2450CP14A100
Detail Specification: 01/06/06	Page 2 of 2

Typical Electrical Performance (T=25°C)

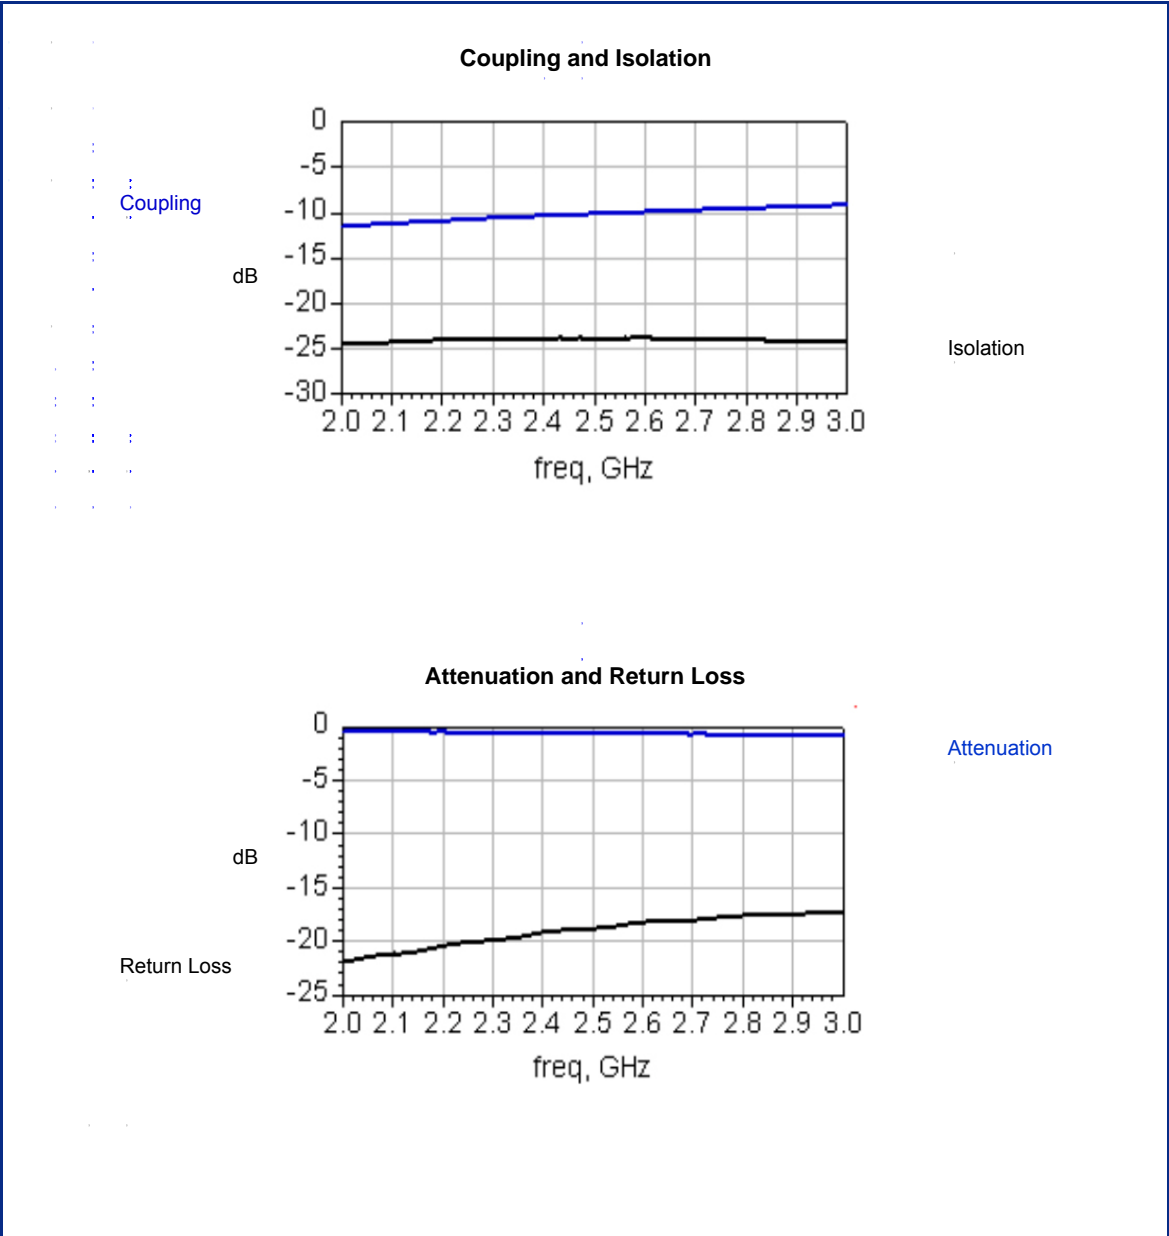

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.