

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)
[SRBC-10F2ALG](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/10 A Output



SRBC-10F2Ax

RoHS Compliant

Rev.A

- Non-Isolated
- High Efficiency
- High Power Density
- Fixed Frequency(300 kHz)
- OCP/SCP
- Flexible Output Voltage Sequencing
- Remote Sense
- Under-Voltage Lockout (UVLO)
- Over Temperature Protection
- Wide Input Range
- Wide Trim Range
- Remote On/Off
- Converter Can Sink and Source Current
- Active Low/High (Option)



Description

The Bel SRBC-10F2Ax modules are a series of non-isolated dc/dc converters that deliver up to 10 A of output current with full load efficiency of 95% at 3.3 Vdc output. These modules provide precisely regulated voltage programmable via external resistor from 0.75 Vdc to 3.63 Vdc over a wide range of input voltage (2.4 Vdc - 5.5 Vdc). These modules have a sequencing feature that enables designers to implement various types of output voltage sequencing when powering multiple voltages on a board. The open-frame construction and small footprint enable designers to develop cost and space-efficient solutions. Standard features include remote On/Off, remote sense, over current protection, short current protection, wide input, and programmable output voltage.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active Low	Model Number Active High
0.75 V - 3.63 V ¹	2.4 V - 5.5 V	10 A	36.3 W	95%	SRBC-10F2AL	SRBC-10F2A0

- Notes:**
1. These modules use a buck topology, so the output voltages must be 0.5 V less than the input voltage.
 2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.
 3. Add "G" to the end of the Model Number to indicate Tray Packaging.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	5.8 V	
Output Enable Terminal Voltage	-0.3 V	-	5.8 V	
Sequencing Voltage ¹	-0.3 V	-	V _{in}	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

- Notes:** All specifications are typical at 25 °C unless otherwise stated.
1. SRBC-10F2Ax series of modules include a sequencing feature that enables users to implement various types of output voltage sequencing in their applications. This is accomplished via an additional sequencing pin. When the sequencing feature is not used, tie the SEQ pin to V_{in} or leave the SEQ pin floating.

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/10 A Output



Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	2.4 V	-	5.5 V	$V_{o, set} \leq V_{in} - 0.5 V$
Input Current (full load)				
$V_o = 3.3 V$	-	7.0 A	8.0 A	
$V_o = 2.5 V$	-	5.5 A	9.5 A	
$V_o = 1.8 V$	-	4.0 A	9.0 A	
$V_o = 1.5 V$	-	3.5 A	7.5 A	
$V_o = 1.2 V$	-	3.0 A	6.0 A	
$V_o = 0.75 V$	-	2.0 A	4.0 A	
Input Current (no load)	-	80 mA	-	
Remote Off Input Current	-	15 mA	-	
Input Reflected Ripple Current (pk-pk)	-	140 mA	-	Tested with two 100 μF /10 V tantalum input capacitors & simulated source impedance of 1 μH , 5 Hz to 20 MHz.
Input Reflected Ripple Current (rms)	-	40 mA	-	
I^2t Inrush Current Transient	-	-	0.2 A ² s	
Turn-on Voltage Threshold	-	2.2 V	-	
Turn-off Voltage Threshold	-	2.0 V	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point	-2% $V_{o, set}$	-	2% $V_{o, set}$	$V_{in} = 5 V$, $I_o = I_{o, max}$ full load
Output Voltage Set Point	-3% $V_{o, set}$	-	3% $V_{o, set}$	Over all operating input voltages, resistive loads and temperature conditions
Load Regulation	-	0.4% $V_{o, set}$	-	$I_o = I_{o, min}$ to $I_{o, max}$
Line Regulation	-	0.3% $V_{o, set}$	-	$V_{in} = V_{in, min}$ to $V_{in, max}$
Regulation Over Temperature (-40 °C to +85 °C)	-	0.5% $V_{o, set}$	-	$T_{ref} = T_{amin}$ to T_{amax}
Output Current	0 A	-	10 A	
Current Limit Threshold	15 A	-	27 A	
Short Circuit Surge Transient	-	-	1.5 A ² s	
Ripple and Noise (pk-pk)	-	25 mV	50 mV	Tested with 0-20 MHz, 10 μF /16 V tantalum capacitor & 1 μF /10 V TDK ceramic capacitor at the output
Ripple and Noise (rms)	-	8 mV	15 mV	
Turn on Time	-	4 mS	8 mS	
Overshoot at Turn on	-	0% $V_{o, set}$	3% $V_{o, set}$	
Output Capacitance				
ESR $\geq 1 m\Omega$	0 μF	-	1000 μF	
ESR $\geq 10 m\Omega$	0 μF	-	4700 μF	
Transient Response				
50% ~ 100% Max Load	$V_o = 3.3 V$	-	130 mV	di/dt=2.5 A/ μS ; $V_{in} = 5 V$; and with two 150 μF /16 V tantalum capacitors & 1 μF /10 V ceramic capacitor at the output
Settling Time		-	50 μS	
100% ~ 50% Max Load		-	150 mV	
Settling Time		-	50 μS	

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/10 A Output



Output Specifications (continued)

Parameter		Min	Typ	Max	Notes
Transient Response					
50% ~ 100% Max Load	Vo=2.5 V	-	130 mV	-	di/dt=2.5 A/uS; Vin=5 V; and with two 150 uF/16 V tantalum capacitors & 1uF/10 V ceramic capacitor at the output
Settling Time		-	50 uS	-	
100% ~ 50% Max Load	Vo=1.8 V	-	130 mV	-	
Settling Time		-	50 uS	-	
50% ~ 100% Max Load	Vo=1.8 V	-	120 mV	-	
Settling Time		-	50 uS	-	
100% ~ 50% Max Load	Vo=1.5 V	-	120 mV	-	
Settling Time		-	50 uS	-	
50% ~ 100% Max Load	Vo=1.5 V	-	120 mV	-	
Settling Time		-	50 uS	-	
100% ~ 50% Max Load	Vo=1.2 V	-	130 mV	-	
Settling Time		-	50 uS	-	
50% ~ 100% Max Load	Vo=1.2 V	-	130 mV	-	
Settling Time		-	50 uS	-	
50% ~ 100% Max Load	Vo=0.75 V	-	120 mV	-	
Settling Time		-	50 uS	-	
100% ~ 50% Max Load	Vo=0.75 V	-	140 mV	-	
Settling Time		-	50 uS	-	

Note: All specifications are typical at nominal input (Vin=5 V), full load at 25 °C unless otherwise stated.

General Specifications

Parameter		Min	Typ	Max	Notes
Efficiency	Vo=3.3 V	92%	95%	-	Measured at Vin=5 V, full load
	Vo=2.5 V	90%	93%	-	
	Vo=1.8 V	88%	91%	-	
	Vo=1.5 V	87%	90%	-	
	Vo=1.2 V	85%	88%	-	
	Vo=0.75 V	79%	82%	-	
Switching Frequency		250 kHz	300 kHz	350 kHz	
Over Temperature Shutdown		-	125 °C	-	
Output Trim Range (Wide Trim)		0.7525 V	-	3.63 V	
Remote Sense Compensation		-	10%	-	
MTBF		6,643,156 hours			Calculated Per Bell Core SR-332 (Io = Nominal; Ta = 25 °C)
Dimensions	Inches (L x W x H)	1.30 x 0.53 x 0.315			
	Millimeters (L x W x H)	33.02 x 13.46 x 8.00			
Weight		-	6.6 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/10 A Output




Control Specifications

Parameter	Min	Typ	Max	Notes
Signal Low (Unit Off)	-0.3 V	-	0.3 V	SRBC-10F2A0; Remote On/Off pin open, Unit on.
Signal High (Unit On)	1.5 V	-	5.8 V	
Signal Low (Unit On)	-0.3 V	-	0.3 V	SRBC-10F2AL; Remote On/Off pin open, Unit on.
Signal High (Unit Off)	1.5 V	-	5.8 V	
Sequencing Voltage	0.05 V	-	V _{in}	Sequencing Voltage should be higher than output voltage.
Sequencing Slew Rate Capability	-	-	2 V/mS	
Sequencing Delay Time	10 mS	-	-	Delay from V _{in} , min to application of voltage on SEQ pin
Tracking Accuracy				
Power-Up	-	100 mV	200 mV	
Power-Down	-	200 mV	400 mV	

Output Trim Equations


Equation for calculating the trim resistor (in kΩ) given the desired adjusted voltage (V_{adj}) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{trim} = \frac{21.07}{V_{adj} - 0.7525} - 5.11$$

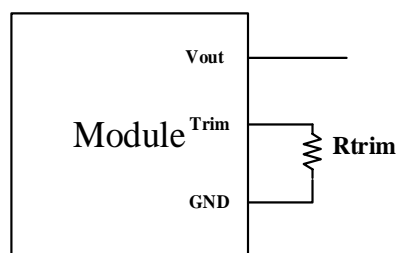

Equation for calculating the trim voltage (in V) given the desired adjusted voltage (V_{adj}) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.


$$V_{trim} = 0.7 - 0.1698 \times (V_{adj} - 0.7525)$$

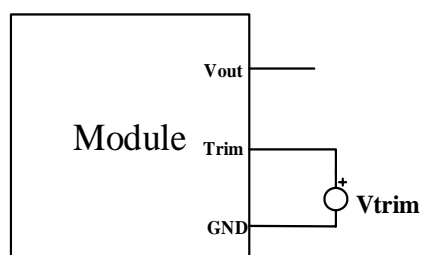


NON-ISOLATED DC/DC CONVERTERS
 2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/10 A Output




Efficiency Data

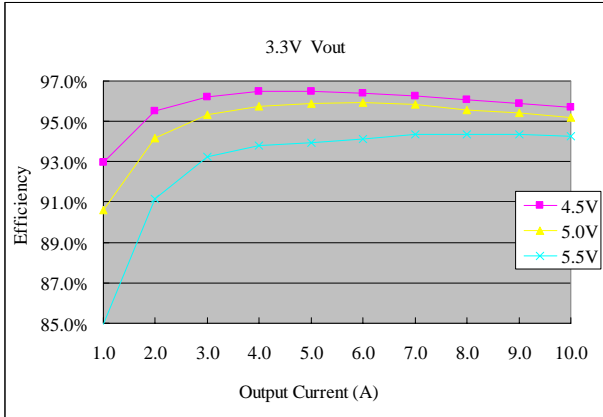


Vo=3.3 V

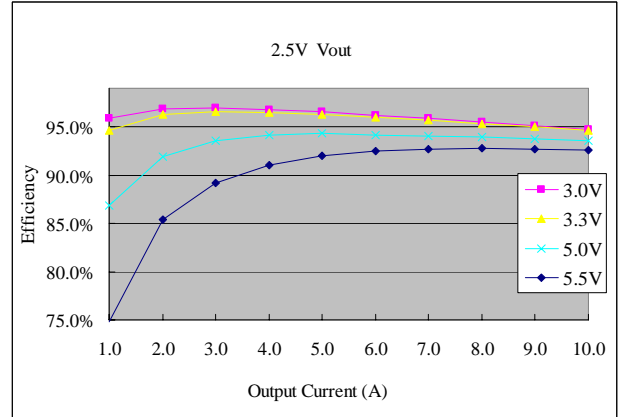


Vo=2.5 V

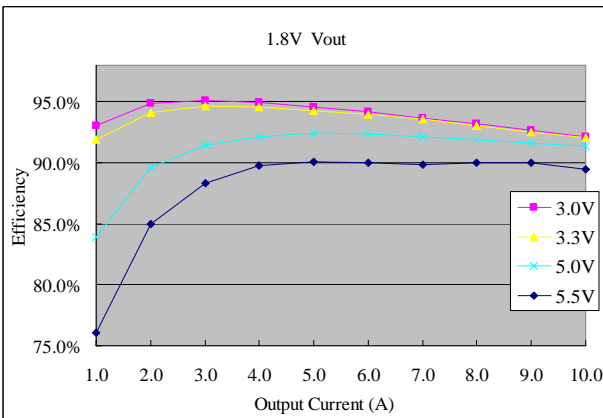


Vo=1.8 V

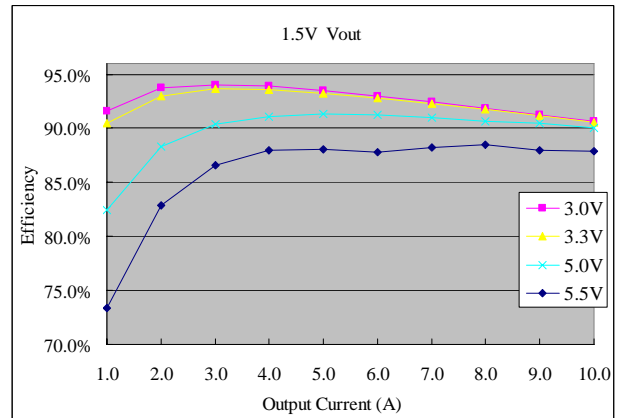

Vo=1.5 V

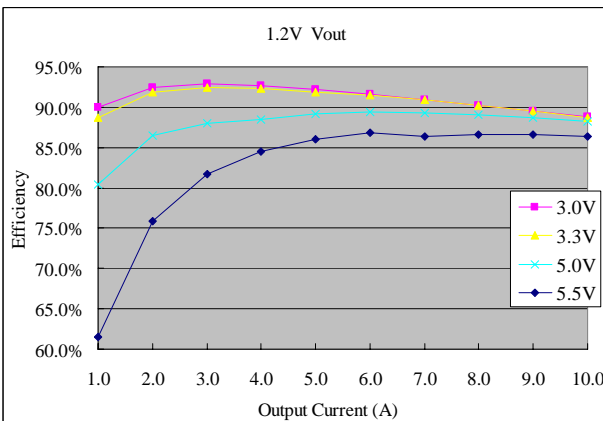

Vo=1.2 V

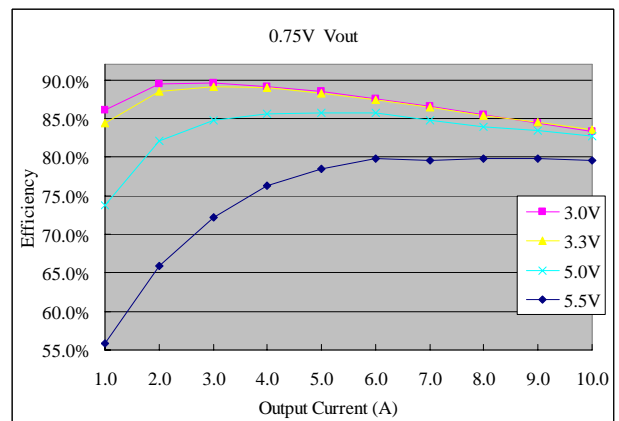


Vo=0.7525 V

NON-ISOLATED DC/DC CONVERTERS


2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/10 A Output




Thermal Derating Curves

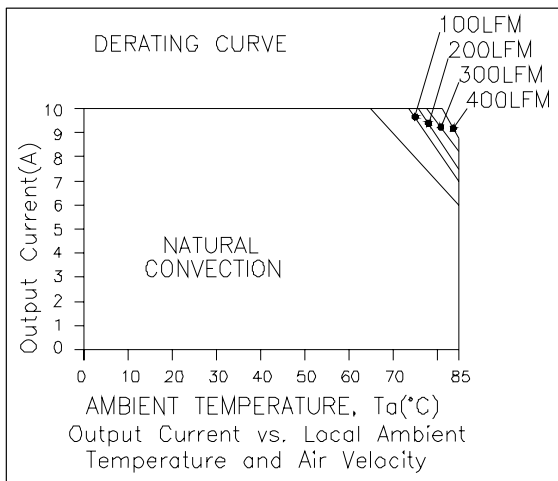


Vin=5.0 V, Vo=0.75 V

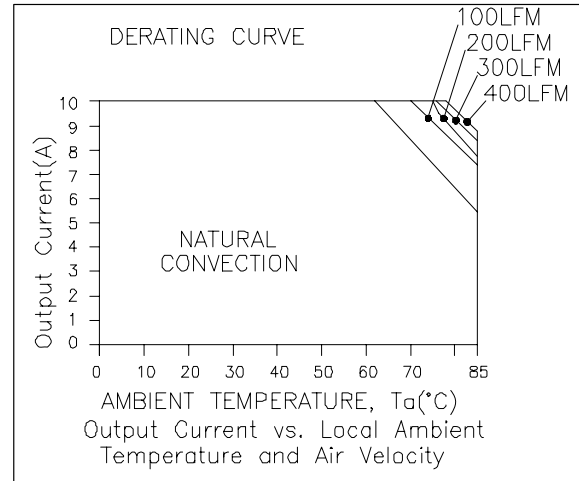

Vin=5.0 V, Vo=1.5 V

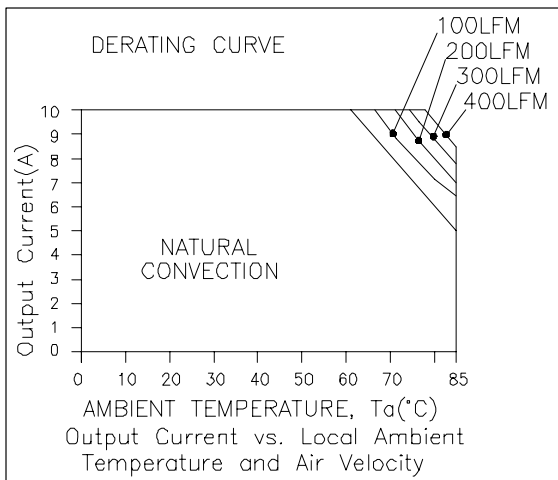

Vin=5.0 V, Vo=2.5 V

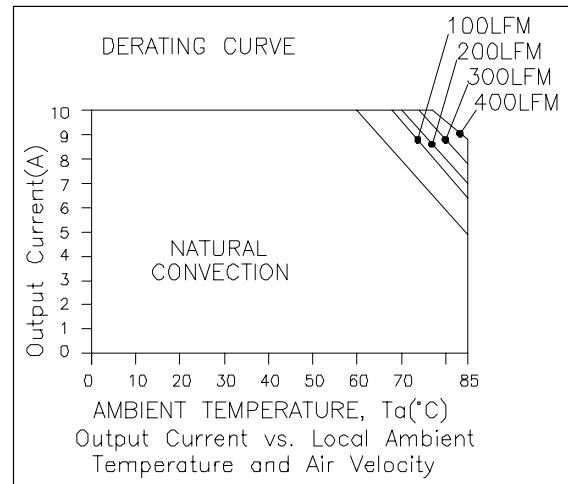

Vin=5.0 V, Vo=3.3 V


NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input


0.75 Vdc - 3.63 Vdc/10 A Output




Thermal Derating Curves (continued)

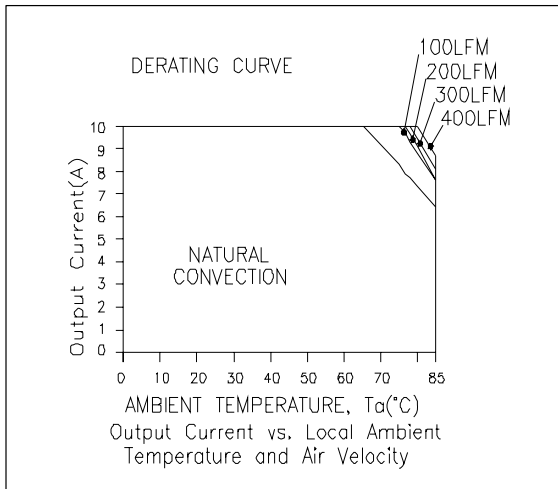

$V_{in}=3.3\text{ V}, V_o=0.75\text{ V}$

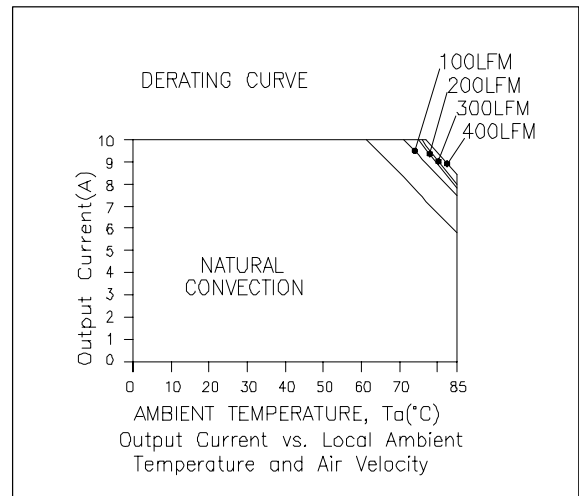

$V_{in}=3.3\text{ V}, V_o=1.5\text{ V}$

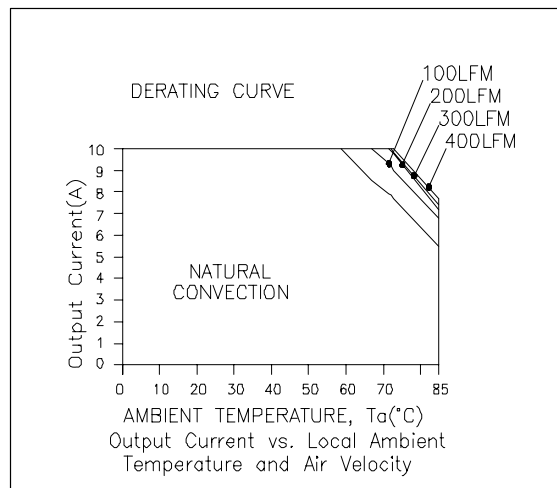


$V_{in}=3.3\text{ V}, V_o=2.5\text{ V}$

NON-ISOLATED DC/DC CONVERTERS


2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/10 A Output




Ripple and Noise Waveforms

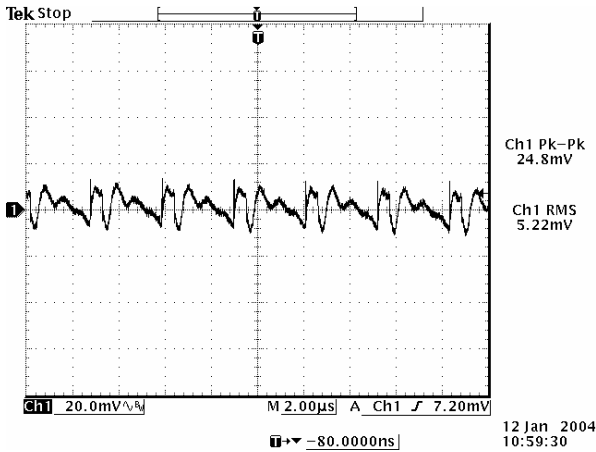


Ripple and noise at full load, 0.75 V output

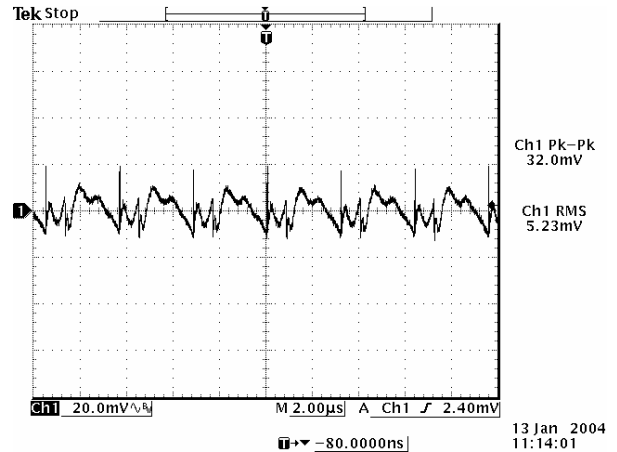


Ripple and noise at full load, 1.2 V output

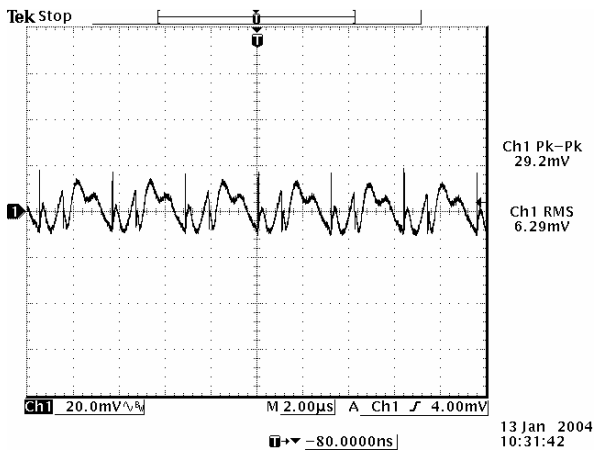


Ripple and noise at full load, 1.5 V output

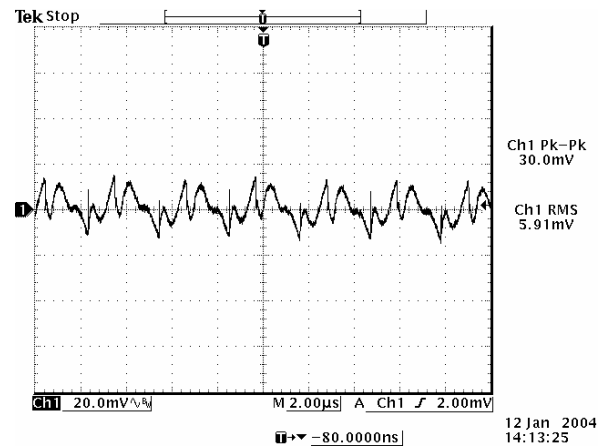

Ripple and noise at full load, 1.8 V output

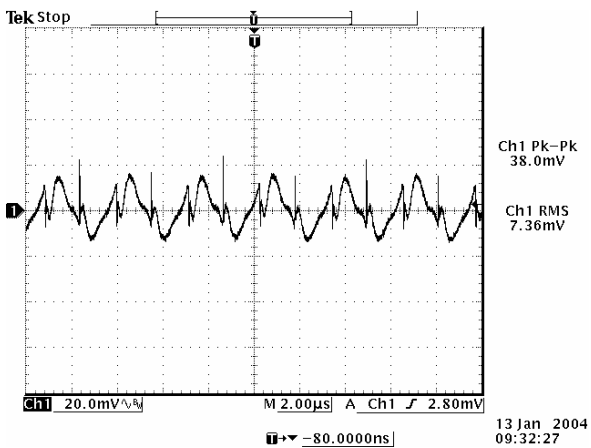

Ripple and noise at full load, 2.5 V output

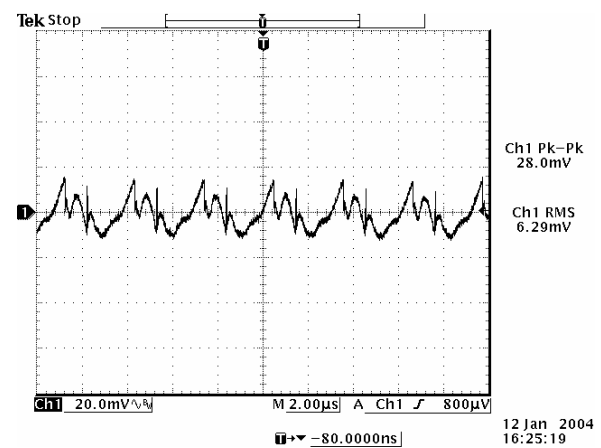


Ripple and noise at full load, 3.3 V output

Note: Ripple and noise at 5.0 V input, 0-20MHz BW, 10 uF/16 V tantalum cap and 1uF/10 V ceramic capacitor, Ta=25 deg C.


NON-ISOLATED DC/DC CONVERTERS
 2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/10 A Output




Transient Response Waveforms

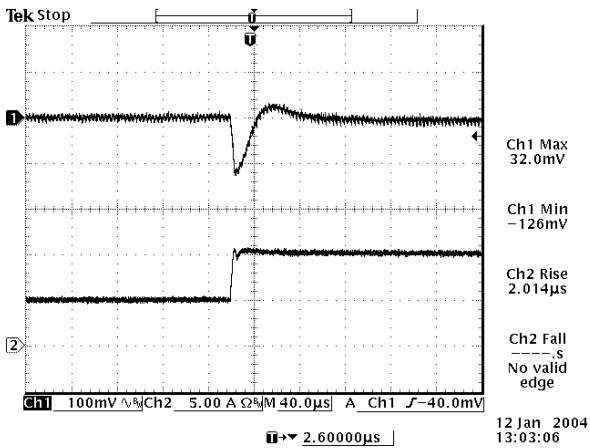


50% to 100% load step at 0.75 V output

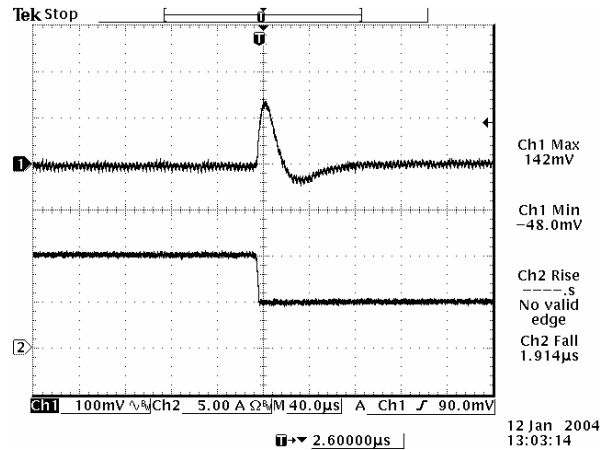


100% to 50% load step at 0.75 V output

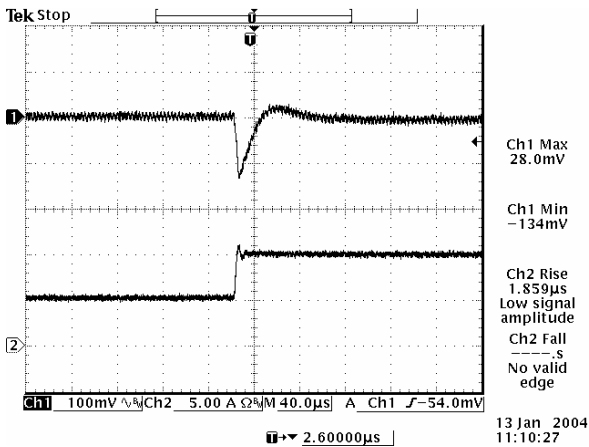


50% to 100% load step at 1.2 V output

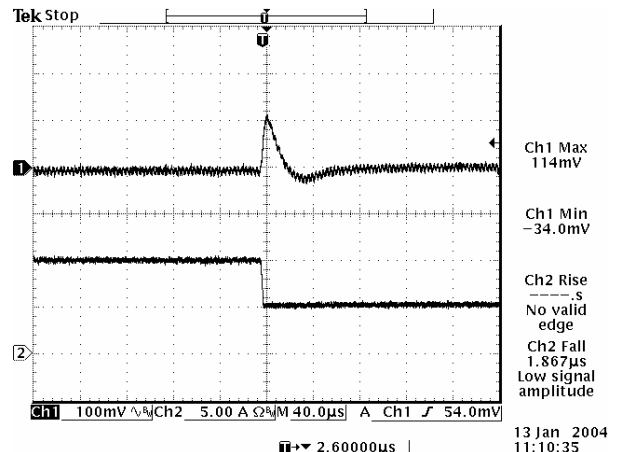

100% to 50% load step at 1.2 V output

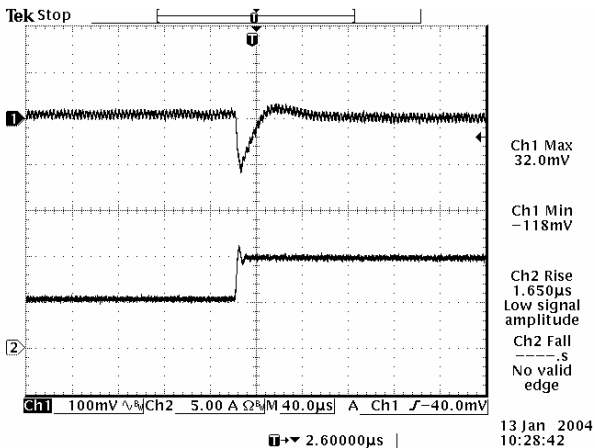

50% to 100% load step at 1.5 V output

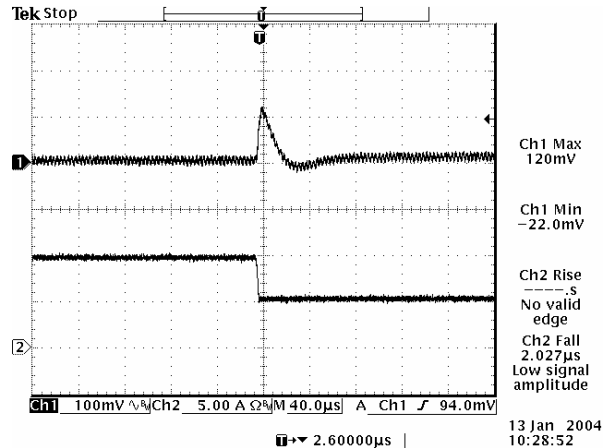


100% to 50% load step at 1.5 V output


NON-ISOLATED DC/DC CONVERTERS
 2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/10 A Output




Transient Response Waveforms (continued)

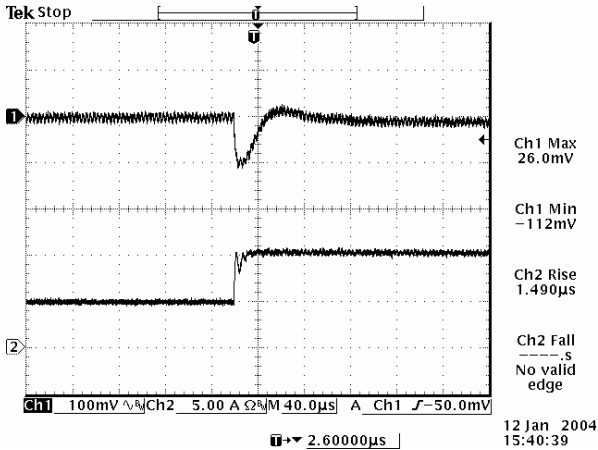


50% to 100% load step at 1.8 V output

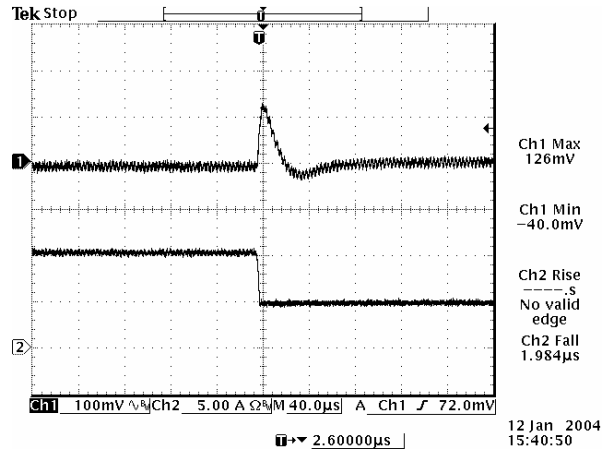


100% to 50% load step at 1.8 V output

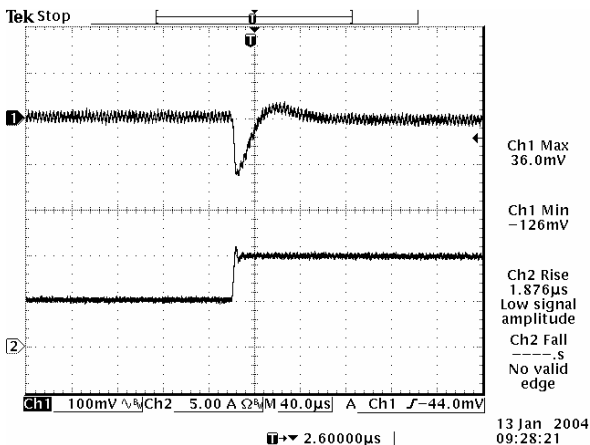


50% to 100% load step at 2.5 V output

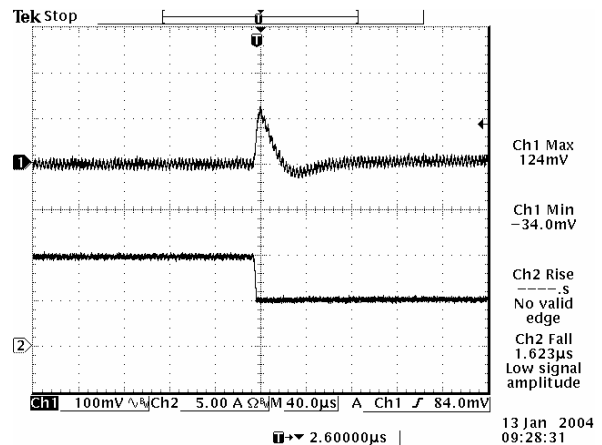

100% to 50% load step at 2.5 V output

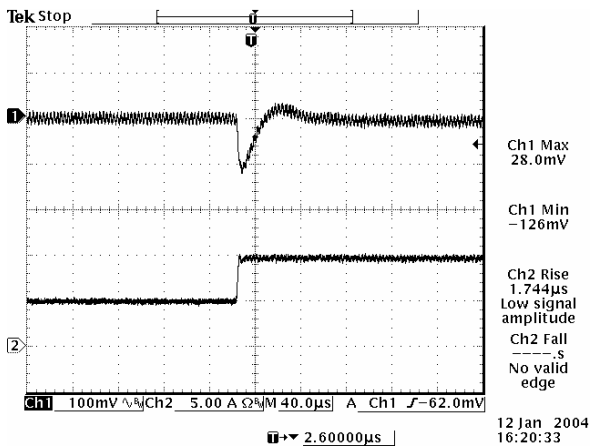

50% to 100% load step at 3.3 V output

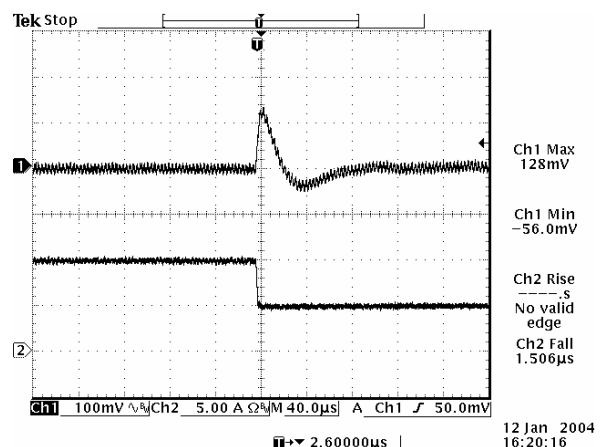

100% to 50% load step at 3.3 V output



Note: Transient response at 5.0 V input, di/dt=2.5 A/µS, with two 150 µF/16 V tantalum capacitors and 1 µF/10 V ceramic capacitor, Ta=25 deg C.

NON-ISOLATED DC/DC CONVERTERS

2.4 Vdc - 5.5 Vdc Input 0.75 Vdc - 3.63 Vdc/10 A Output




Mechanical Outline

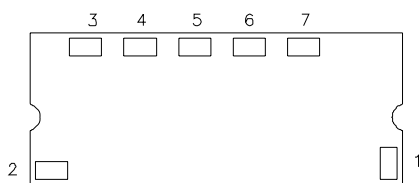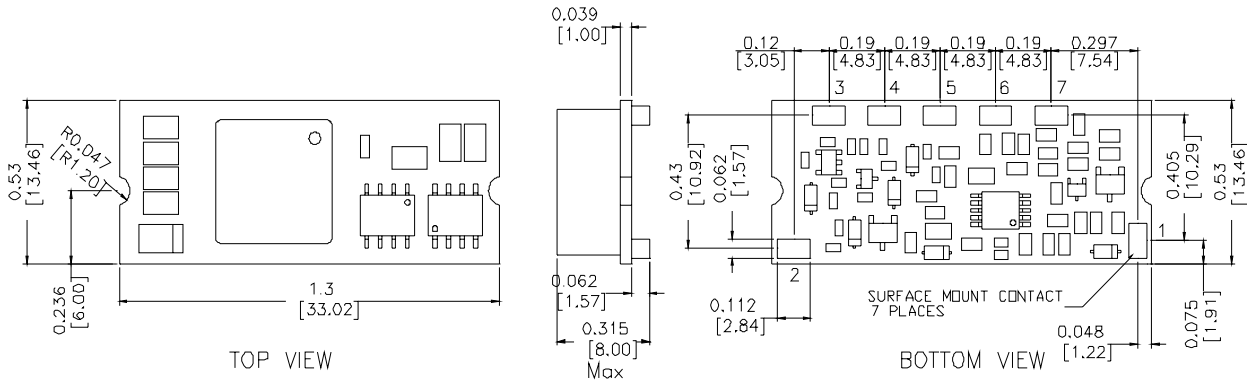

BOTTOM VIEW

RECOMMENDED PAD LAYOUT

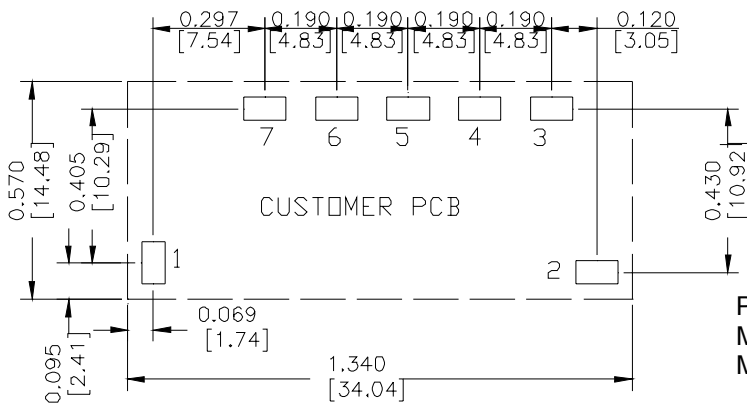

Pin Connections

Pin	Function
1	Remote On/Off
2	Vin
3	SEQ
4	Ground
5	Vout
6	Trim
7	Remote Sense

PAD SIZE:
 MIN: 0.14" * 0.095" (3.56mm * 2.41mm)
 MAX: 0.165" * 0.11" (4.19mm * 2.79mm)

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



CORPORATE

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302
 Tel 201-432-0463
 Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
 8F/ 8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel 852-2328-5515
 Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Suite G7, Preston
 Lancashire, PR1 8UD, U.K.
 Tel 44-1772-556601
 Fax 44-1772-888366
www.belfuse.com