Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

On-Shore Technology, Inc.
OSTHA020050

For any questions, you can email us directly:
sales@integrated-circuit.com

SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!







N=Number of contacts

P.C.B. LAYOUT

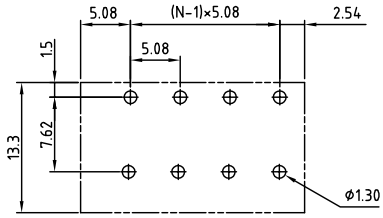

Material

- Terminal body (Contact pin): Brass
- Wire guard: Stainless steel
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus/VDE

- Voltage rating: 300VAC/250VAC
- Current rating: 10A/10A
- Wire range: 0.75-1.5mm²
  Solid wire(AWG): 14-24
  Stranded wire(AWG): 14-24
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

RoHS Compliant

PART NUMBER:

OSTHAXX0050

No. of Poles		COLOR	
02	2 Poles	0:	Black
03	3 Poles	5:	Green (Standard)
...	...	6:	Blue
24	24 Poles	8:	Grey

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

ON-SHORE TECHNOLOGY, INC.

TITLE	HA-5.08mm series vertical (90°wire inlet)					
PART NO.	OSTHAXX0050			DWG NO.	OSTHAXX0050.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
Shi Jun 2006.11.01	Marvin 2006.11.01	Steady 2006.10.11	Steady 2006.10.11	UNIT: mm SCALE: NONE SHEET: 01/01		X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
					REV.: D	