

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Pulse Electronics Corporation](#)


[PE-65540NL](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# 64 KBPS INTERFACE TRANSFORMERS

## Designed for G.703 Codirectional Interface


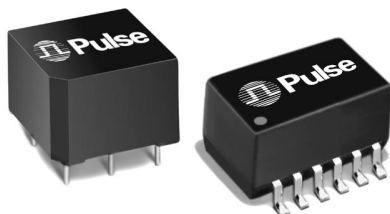


- Single and dual transformer modules for ITU G.703 codirectional applications
- Transformers matched to the integrated circuit
- Provide 1500 Vrms minimum isolation



### Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

| Part Number | Turns Ratio (±3%) | OCL (mH MIN) | LL (μH MAX) | Cw/w (pF MAX) | DCR pri (Ω MAX) | DCR sec (Ω MAX) | Package/ Schematic | Matched To                        |
|-------------|-------------------|--------------|-------------|---------------|-----------------|-----------------|--------------------|-----------------------------------|
| PE-65535NL  | 1:2CT             | 20.0         | 5.0         | 130           | 2.65            | 5.0             | IS/5               | EXAR XR6164<br>XR-T6165, XR-T6166 |
| PE-65540NL  | 1CT:1             | 10.0         | 5.0         | 100           | 2.60            | 2.6             | IS/6               | —                                 |
| T7015NL     | 1:2CT & 1:2CT     | 20.0         | 5.0         | 130           | 2.80            | 5.6             | AN/1               | —                                 |

### Mechanicals

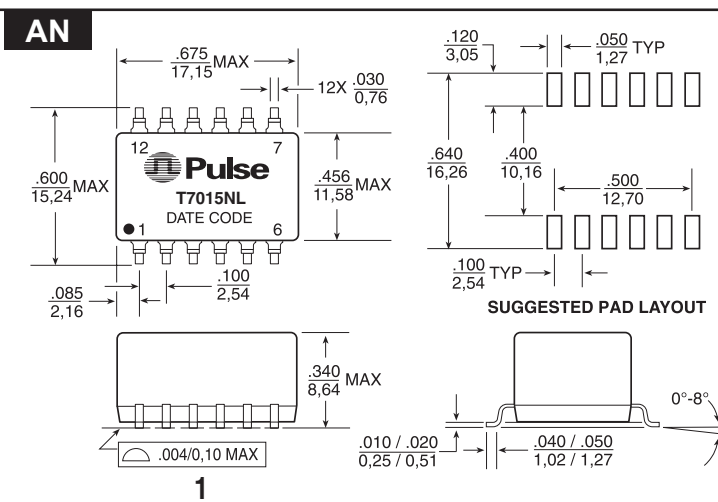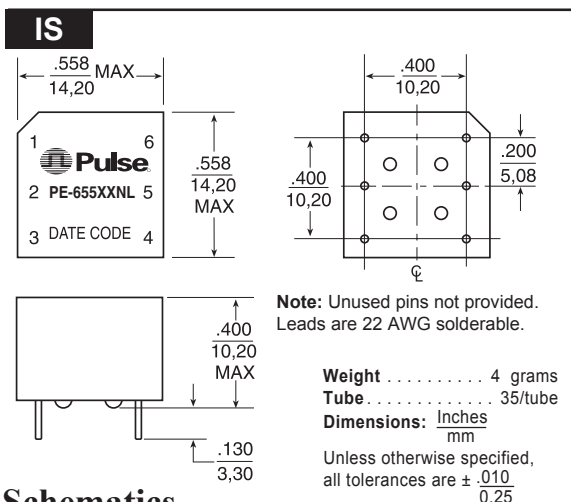

### Schematics

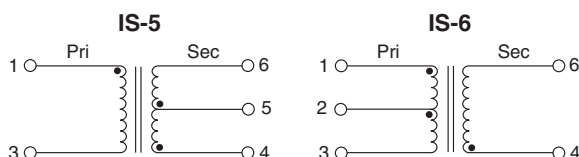

**Weight** ..... 4.0 grams  
**Tape & Reel** ..... 250/reel  
**Tube** ..... 30/tube  
**Dimensions:** Inches mm  
Unless otherwise specified, all tolerances are ± .010 / 0,25

The CCITT recommendations G.703 describe the physical and electrical characteristics of digital interfaces at 64 Kbps. PE-65535NL listed above has been designed for the codirectional interface and matches the driver/receiver chips from EXAR

(XR6164, XR-T6165, and XR-T6166). The characteristics of these transformers allow the pulse to comply with the pulse masks in the 120 Ω system.

### For More Information :

**Pulse Worldwide Headquarters**  
12220 World Trade Dr.  
San Diego, CA 92128  
U.S.A.

[www.pulseeng.com](http://www.pulseeng.com)

Tel: 858 674 8100  
Fax: 858 674 8262

**Pulse Europe**  
Einsteinstrasse 1  
D-71083 Herrenberg  
Germany

Tel: 49 7032 7806 0  
Fax: 49 7032 7806 135

**Pulse China Headquarters**  
B402, Shenzhen Academy of  
Aerospace Technology Bldg.  
10th Kejinan Rd.  
High-Tech Zone  
Nanshan District  
Shenzhen, PR China 518057  
Tel: 86 755 33966678  
Fax: 86 755 33966700

**Pulse North China**  
Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Rd. West  
Shanghai 200336  
China

Tel: 86 21 62787060  
Fax: 86 2162786973

**Pulse South Asia**  
135 Joo Seng Rd.  
#03-02  
PM Industrial Bldg.  
Singapore 368363

Tel: 65 6287 8998  
Fax: 65 6287 8998

**Pulse North Asia**  
3F, No. 198  
Zhongyuan Rd.  
Zhongli City  
Taoyuan County 320  
Taiwan R. O. C.  
Tel: 886 3 4356768  
Fax: FRE 886 3 4356820  
Pulse: 886 3 4356823

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

Printed on recycled paper. ©2010, Pulse Engineering, Inc.

**T611.D (9/10)**