

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Pulse Electronics Corporation](#)

[C2073ANLT](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

RF TRANSFORMER

For Wideband RF Applications



- For single-ended to balanced applications
- Value-oriented construction
- Small surface mount package
- Excellent insertion loss
- Various impedance ratios available

Electrical Specifications @ 25°C



Standard Part Number	RoHS-6 Compliant Part No.	Impedance Ratio ¹ Pri:Sec (±2%)	Turns Ratio ¹ Pri:Sec (±2%)	Insertion Loss ² (dB TYP/MAX)		Amplitude Balance ² (dB TYP/MAX)		Phase Balance ² (degrees TYP/MAX)		Return Loss (dB TYP/MIN)	
C2073	C2073NL	1:4CT	1:2CT	5-65MHz:	65-200MHz:	5-65MHz:	65-200MHz:	5-65MHz:	65-200MHz:	5-65MHz:	65-200MHz:
C2073A	C2073ANL			0.50/0.70	0.80/1.20	0.01/0.02	0.02/0.05	0.4/2.0	2.0/5.0	20/15	13/7.0
CX2148	CX2148NL	1:1CT	1:1CT	5-50 MHz:		5-50 MHz:		5-50 MHz:		5-50 MHz:	
CX2148A	CX2148ANL			0.50dB MAX		0.10dB MAX		2° MAX		20dB MIN	

NOTE: Part with cover plate is designated C2073A or CX2148A. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (ex: C2073T, C2073AT or C2073NLT).




Mechanical

Schematic

C2073/CX2148

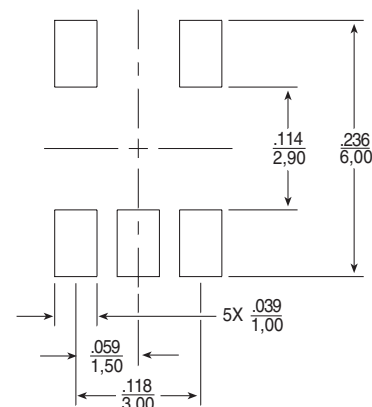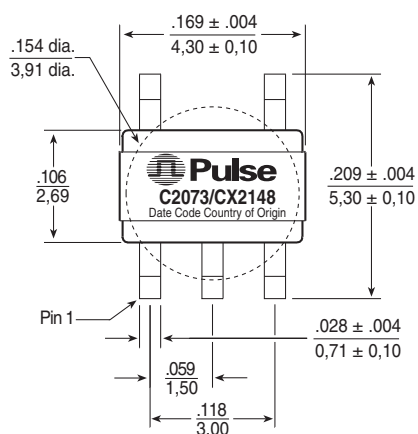

SUGGESTED PAD LAYOUT

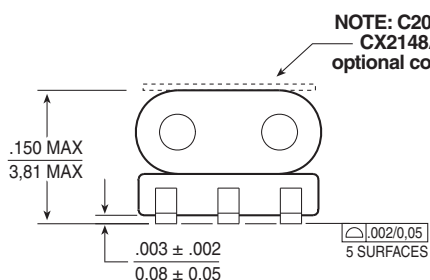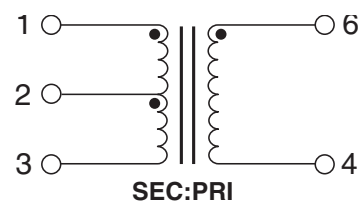

Dimensions: Inches / mm
 Unless otherwise specified,
 all tolerances are ± .010 / 0.25

RF TRANSFORMER

For Wideband RF Applications




Application Notes


- A. Materials used in the products are UL94-V0 recognized. Products meet requirements of IEC 695-2-2 (Needle Flame Test).
- B. For additional impedance ratios and frequency ranges, please contact Applications Engineering.
- C. For performance plots of **CX2148** and **CX2148A**, please contact Applications Engineering.

Notes from Tables

1. Impedance and turns ratios are specified primary:secondary. (CT=Center Tap).
2. For **CX2148** and **CX2148A**, Insertion Loss, Amplitude Balance and Phase Balance are measured on balanced side (secondary output pins 1 and 3) relative to ground pin (pin 2).

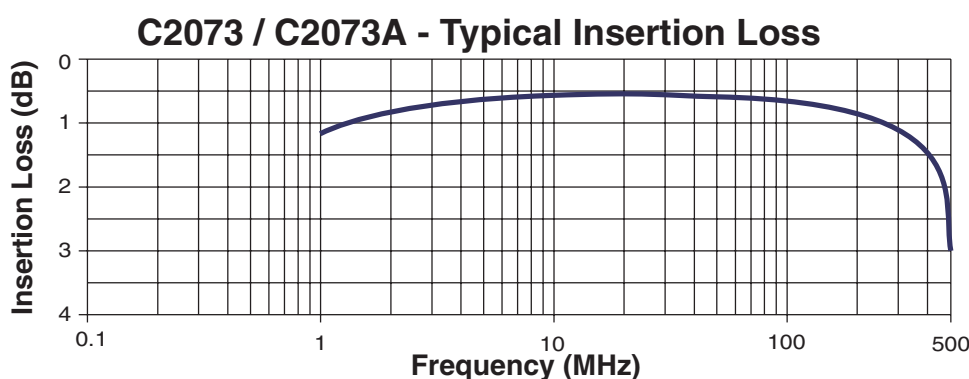

Tape and Reel Information

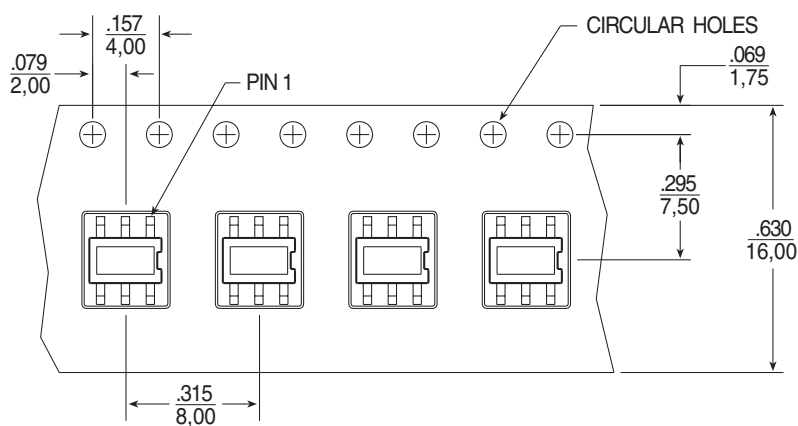

Weight 0.43 grams
Tape & Reel 2000 /reel
Tray 100 /tray

USER DIRECTION OF FEED
QTY: 2200 PCS / REEL

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
www.pulseeng.com
TEL: 858 674 8100
FAX: 858 674 8262

Pulse Northern Europe

3 Huxley Road
Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

Pulse Southern Europe

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

Pulse China Headquarters

No. 1
Industrial District
Changan, Dongguan
China
TEL: 86 769 5538070
FAX: 86 769 5538870

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Road
Shanghai 200233
China
TEL: 86 21 54643211/2
FAX: 86 21 54643210

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 6287 8998
FAX: 65 6280 0080

Pulse North Asia

No. 26
Kao Ching Road
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.
TEL: 886 3 4641811
FAX: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2006. Pulse Engineering, Inc. All rights reserved.

www.pulseeng.com

C224.B (2/06)