



Distributor of Richtek USA Inc.: Excellent Integrated System Limited

Datasheet of RT34063AGS - IC REG BCK BST INV ADJ 1.5A 8SOP

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Richtek USA Inc.](#)

[RT34063AGS](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DC/DC Converter Control Circuits

General Description

The RT34063A Series is a monolithic control circuit containing the primary functions required for DC/DC converters.

These devices consist of an internal temperature compensated reference, comparator, controlled duty cycle oscillator with an active current limit circuit, driver and high current output switch.

This series was specially designed to be incorporated in step-down and step-up and Voltage-inverting applications with a minimum number of external components.

Ordering Information

| | | |
|----------|---|--------------------------------------|
| RT34063A | □ | □ |
| | — | Package Type |
| | | N : DIP-8 |
| | | S : SOP-8 |
| | — | Lead Plating System |
| | | P : Pb Free |
| | | G : Green (Halogen Free and Pb Free) |

Note :

Richtek products are :

- ▶ RoHS compliant and compatible with the current requirements of IPC/JEDEC J-STD-020.
- ▶ Suitable for use in SnPb or Pb-free soldering processes.

Functional Pin Description

| Pin Name | Pin Function |
|----------|---|
| SC | 1.5A Switch Collector. |
| SE | Darlington Switch Emitter. |
| TC | Oscillator Timing Capacitor. |
| GND | Power GND. |
| COMP | Feedback Comparator Inverting Input. |
| VCC | Power Supply Input. |
| IPK | High side Current Sense Input $VCC - V_{IPK} = 330mV$. |
| DRIVER | Driver Collector. |


Features

- Operation from 3.0V to 30V Input
- Low Standby Current
- Current Limiting
- Internal Switch Current to 1.5A
- Output Voltage Adjustable
- Frequency Operation to 100kHz
- Precision 2% Reference
- RoHS Compliant and 100% Lead (Pb)-Free

Applications

- Saver for Cellular Phones
- DC/DC Converter Module

Pin Configurations

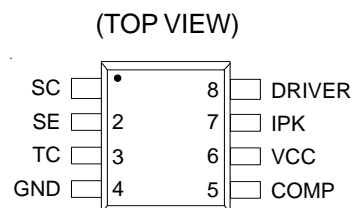


DIP-8 / SOP-8

RT34063A



Function Block Diagram

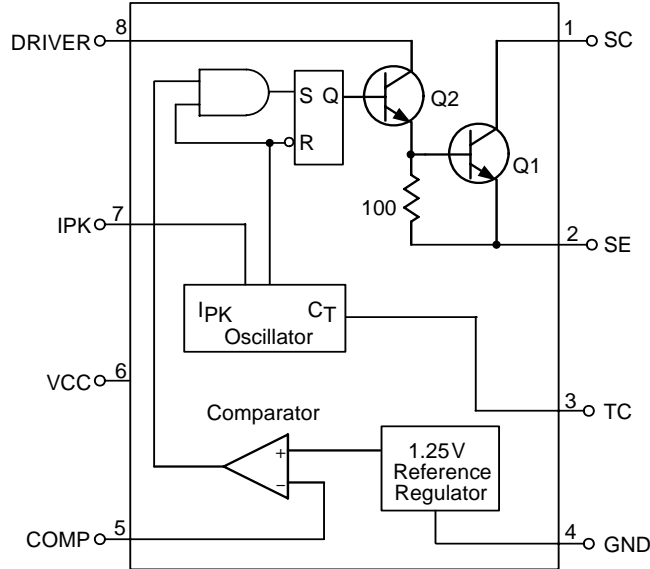

Typical Application Circuit



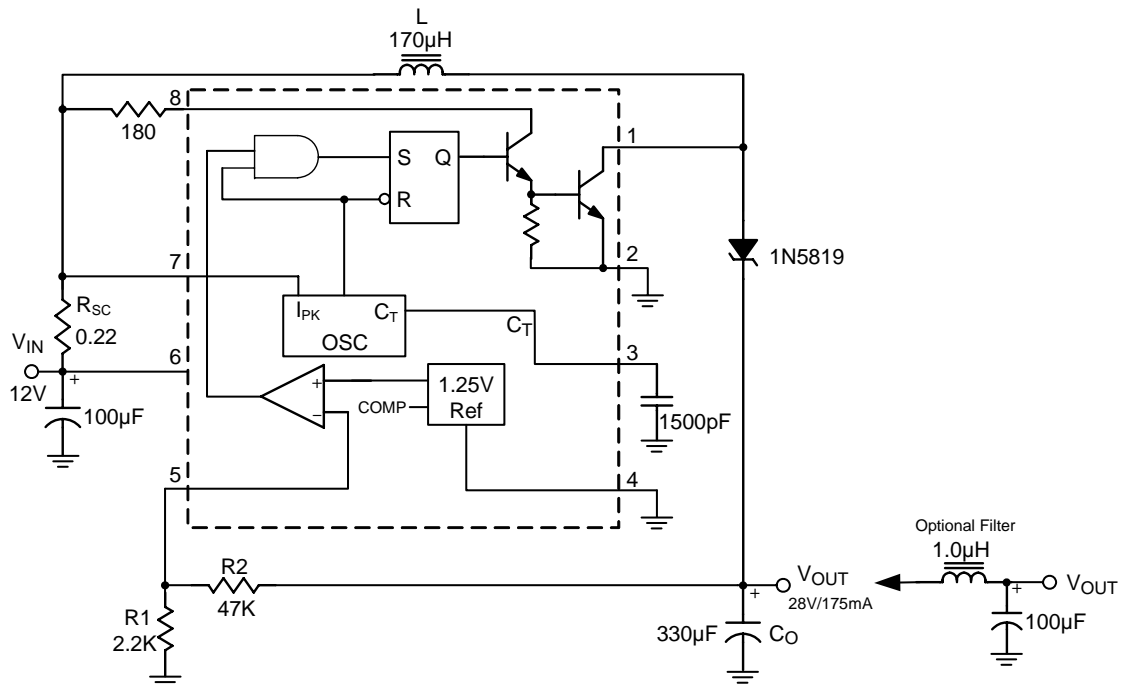


Figure 1. Step-up Converter

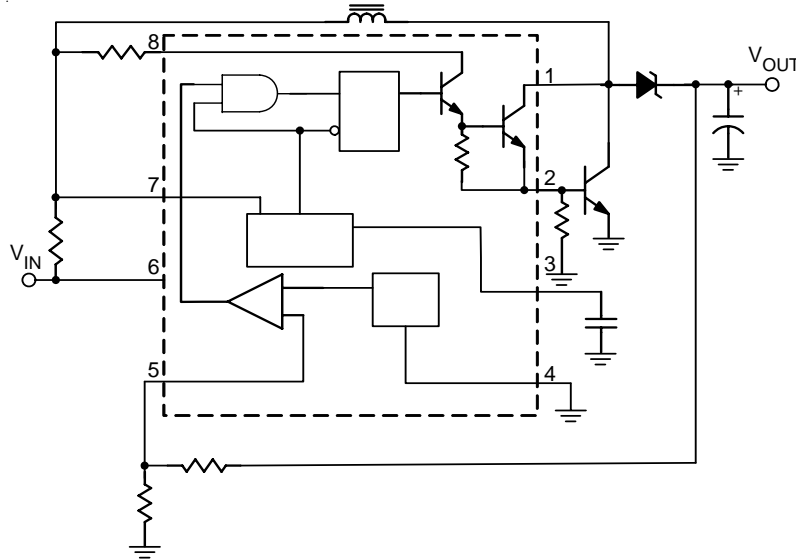

(a) External NPN Switch

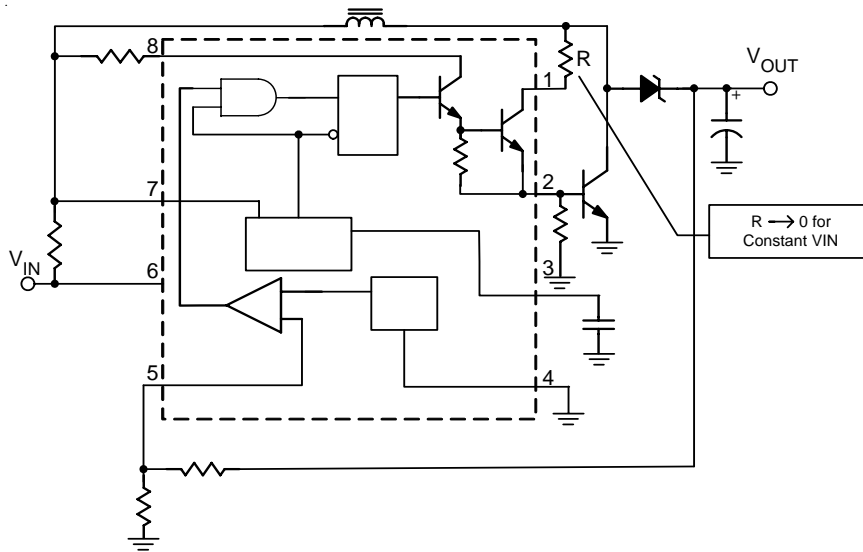

(b) External NPN Saturated Switch (See Note)

Figure 2. External Current Boost Connections for I_C Peak Greater than 1.5A

Note: If the output switch is driven into hard saturation (non-Darlington configuration) at low switch currents ($\leq 300\text{mA}$) and high driver currents ($\geq 30\text{mA}$), it may take up to $2.0\mu\text{s}$ to come out of saturation. This condition will shorten the off time at frequencies $\geq 30\text{kHz}$, and is magnified at high temperature. This condition does not occur with a Darlington configuration, since the output switch cannot saturate. If a non-Darlington configuration is used, the following output drive condition is recommended.

RT34063A



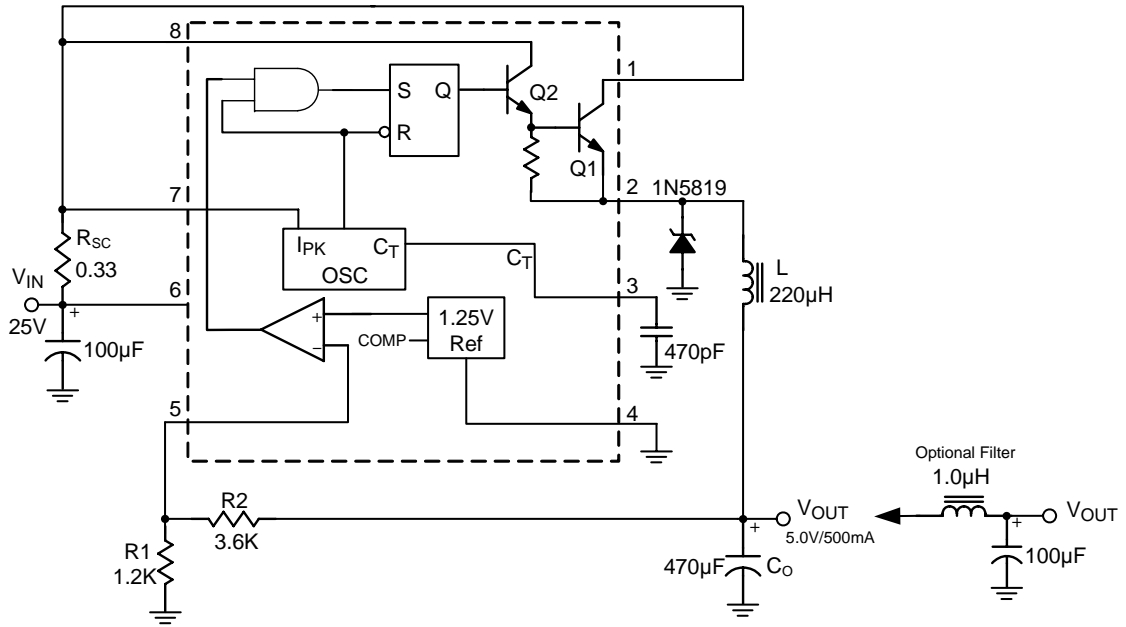


Figure 3. Step-down Converter

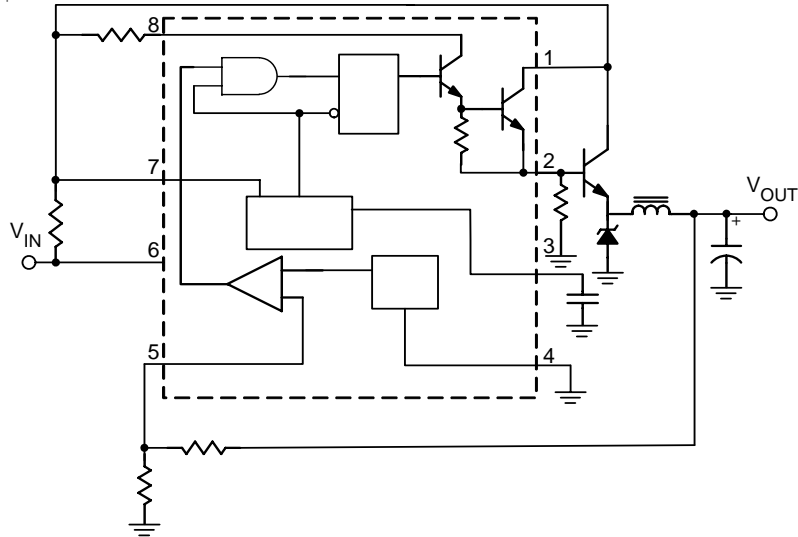

(a) External NPN Switch

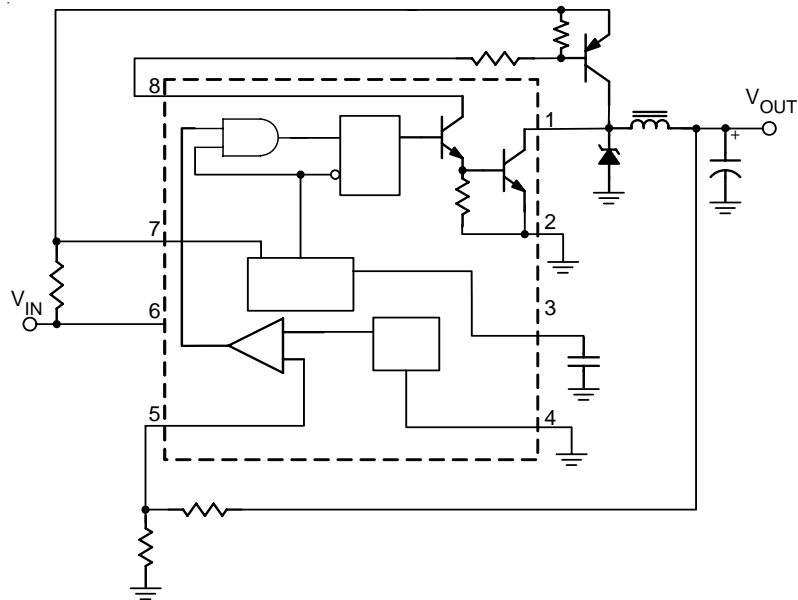

(b) External PNP Saturated Switch

Figure 4. External Current Boost Connections for I_C Peak Greater than 1.5A

RT34063A



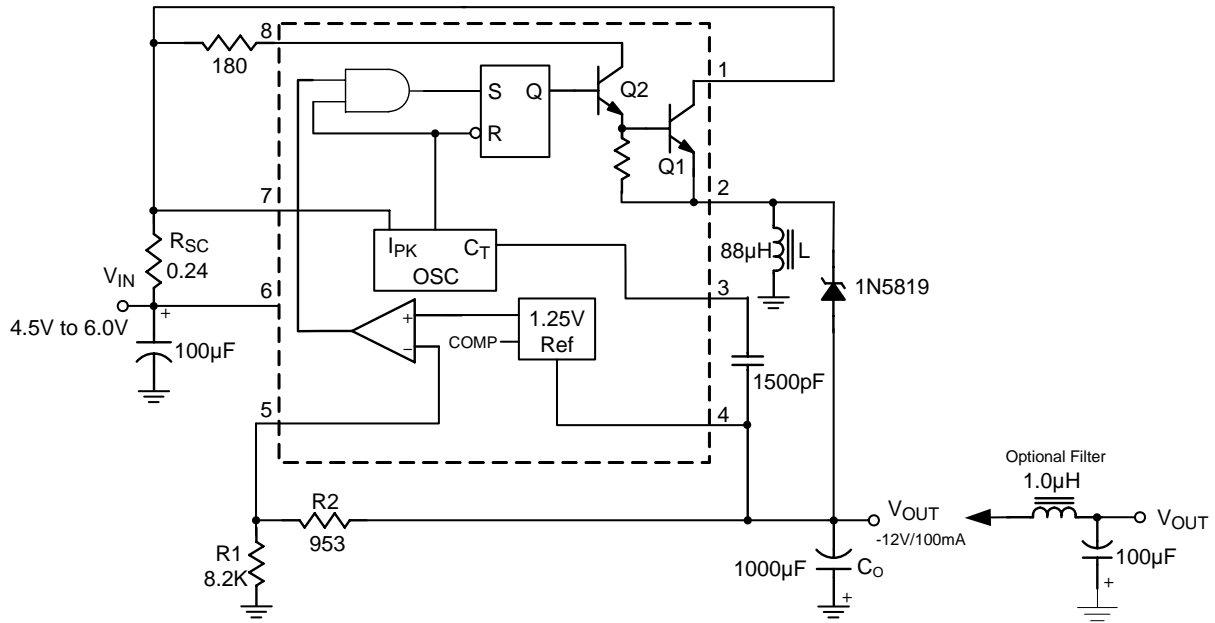


Figure 5. Voltage Inverting Converter

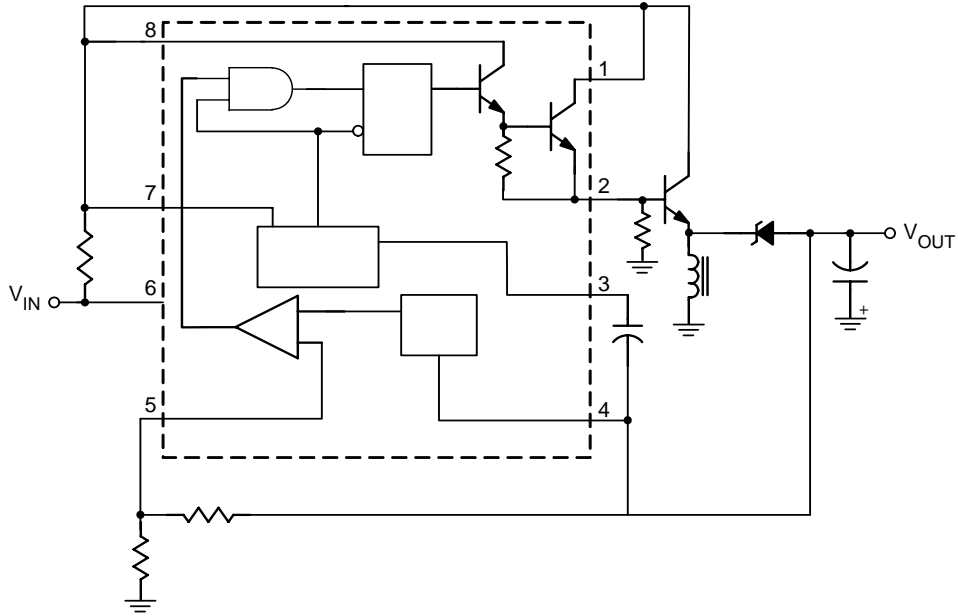

(a) External NPN Switch

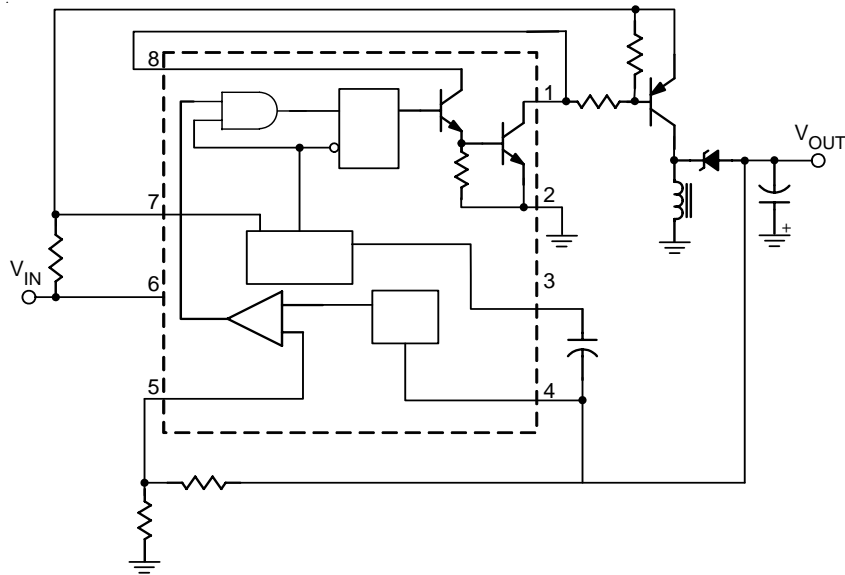

(b) External PNP Saturated Switch

Figure 6. External Current Boost Connections for Peak Greater than 1.5A

RT34063A



Design Formula Table

| Calculation | Step-up | Step-down | Voltage-Inverting |
|----------------------|---|---|---|
| t_{on}/t_{off} | $\frac{V_{OUT} + V_F - V_{IN(MIN)}}{V_{IN(MIN)} - V_{SAT}}$ | $\frac{V_{OUT} + V_F}{V_{IN(MIN)} - V_{SAT} - V_{OUT}}$ | $\frac{ V_{OUT} + V_F}{V_{IN} - V_{SAT}}$ |
| $(t_{on} + t_{off})$ | $\frac{1}{f}$ | $\frac{1}{f}$ | $\frac{1}{f}$ |
| t_{off} | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$ | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$ | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$ |
| t_{on} | $(t_{on} + t_{off}) - t_{off}$ | $(t_{on} + t_{off}) - t_{off}$ | $(t_{on} + t_{off}) - t_{off}$ |
| C_T | $4.0 \times 10^{-5} t_{on}$ | $4.0 \times 10^{-5} t_{on}$ | $4.0 \times 10^{-5} t_{on}$ |
| $I_{pk(SWITCH)}$ | $2 I_{OUT(MAX)} \left(\frac{t_{on}}{t_{off}} + 1 \right)$ | $2 I_{OUT(MAX)}$ | $2 I_{OUT(MAX)} \left(\frac{t_{on}}{t_{off}} + 1 \right)$ |
| R_{SC} | $0.3/I_{pk(SWITCH)}$ | $0.3/I_{pk(SWITCH)}$ | $0.3/I_{pk(SWITCH)}$ |
| $L(\text{min})$ | $\left(\frac{(V_{IN(MIN)} - V_{SAT})}{I_{pk(SWITCH)}} \right) t_{on(MAX)}$ | $\left(\frac{(V_{IN(MIN)} - V_{SAT})}{I_{pk(SWITCH)}} \right) t_{on(MAX)}$ | $\left(\frac{(V_{IN(MIN)} - V_{SAT})}{I_{pk(SWITCH)}} \right) t_{on(MAX)}$ |
| C_O | $9 \frac{I_{OUT} t_{on}}{V_{ripple(pp)}}$ | $\frac{I_{pk(SWITCH)}(t_{on} + t_{off})}{8V_{ripple(pp)}}$ | $9 \frac{I_{OUT} t_{on}}{V_{ripple(pp)}}$ |

V_{SAT} : Saturation voltage of the output switch.

V_F : Forward voltage drop of the output rectifier.

The following power supply characteristics must be chosen:

V_{IN} : Nominal input voltage.

V_{OUT} : Desired output voltage $|V_{OUT}| = 1.25 \left(1 + \frac{R_2}{R_1} \right)$

I_{OUT} : Desired output current.

f : Minimum desired output switching frequency at the selected values of V_{in} and I_o .

$V_{ripple(pp)}$: Desired peak-to-peak output ripple voltage. In practice, the calculated capacitor value needs to be increased due to its equivalent series resistance and board layout. The ripple voltage should be kept to a low value since it directly affects the line and load regulation.

Absolute Maximum Ratings (Note 1)

| | | |
|---|-------|--------------|
| • Power Supply Voltage | ----- | 30V |
| • Feedback Input Voltage Range | ----- | -0.3 to +30V |
| • Switch Collector Voltage | ----- | 30V |
| • Switch Emitter Voltage | ----- | 30V |
| • Switch Collector to Emitter Voltage | ----- | 30V |
| • Driver Collector Voltage | ----- | 30V |
| • Driver Collector Current (see Note) | ----- | 100mA |
| • Switch Current | ----- | 1.5A |
| • Power Dissipation, P _D @ T _A = 25°C | | |
| DIP-8 | ----- | 1.25W |
| SOP-8 | ----- | 0.625W |
| • Package Thermal Resistance (Note 2) | | |
| DIP-8, θ _{JA} | ----- | 100°C/W |
| SOP-8, θ _{JA} | ----- | 160°C/W |
| • Junction Temperature | ----- | 150°C |
| • Storage Temperature Range | ----- | -65 to 150°C |

Recommended Operating Conditions (Note 3)

| | | |
|------------------------------------|-------|----------------|
| • Power Supply Input Voltage Range | ----- | 3V to 30V |
| • Junction Temperature Range | ----- | -40°C to 125°C |
| • Ambient Temperature Range | ----- | -40°C to 85°C |

Electrical Characteristics

(V_{CC} = 5V, T_A = 25°C, unless otherwise specified)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|---|---------------------|--|-----|------|-----|------|
| Oscillator | | | | | | |
| Frequency | | V _{PIN5} = 0V, C _T = 1.0nF | 26 | 38 | 48 | kHz |
| Charge Current | I _{CHG} | 5.0V ≤ V _{CC} ≤ 30V | 25 | 36 | 43 | μA |
| Discharge Current | I _{DISCHG} | 5.0V ≤ V _{CC} ≤ 30V | 160 | 250 | 290 | μA |
| Discharge to Charge Current Ratio | | Pin 7 to V _{CC} | 5.5 | 6.9 | 7.9 | -- |
| Current Limit Sense Voltage | V _{LIM} | I _{CHG} = I _{DISCHG} | 280 | 330 | 380 | mV |
| Output Switch | | | | | | |
| Saturation Voltage, Darlington Connection | | I _{SW} = 1.0A, Pins1, 8 connected | -- | 1.0 | 1.3 | V |
| Saturation Voltage, Darlington Connection | | I _{SW} = 1.0A, R _{PIN8} = 82Ω to V _{CC} , Forced β ≅ 20 | -- | 0.45 | 0.7 | V |
| DC Current Gain | | I _{SW} = 1.0A, V _{CE} = 5.0V | 50 | 75 | -- | -- |
| Collector Off-state Current | | V _{CE} = 30V | -- | 0.01 | 100 | μA |

To be continued

RT34063A



| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|-----------------------------------|-------------------|--|-------|------|-------|------|
| Comparator | | | | | | |
| Threshold Voltage | | | 1.225 | 1.25 | 1.275 | V |
| Threshold Voltage Line Regulation | | $3.0V \leq VCC \leq 30V$ | -- | 1.4 | 5.0 | mV |
| Input Bias Current | I _{BIAS} | V _{IN} = 0V | -- | -20 | -400 | nA |
| Total Device | | | | | | |
| Supply Current | I _{CC} | VCC = 5.0V to 30V, C _T = 1.0nF, Pin7 = VCC, V _{PIN5} > V _{TH} , Pin2 = GND, Remaining pins open | -- | 3.0 | 4.5 | mA |

Note 1. Stresses listed as the above "Absolute Maximum Ratings" may cause permanent damage to the device. These are for stress ratings. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may remain possibility to affect device reliability.

Note 2. θ_{JA} is measured in the natural convection at T_A = 25°C on a low effective thermal conductivity test board of JEDEC 51-3 thermal measurement standard.


Note 3. The device is not guaranteed to function outside its operating conditions.

RICHTEK


RT34063A

Typical Operating Characteristics


Output Switch On-Off Time vs. Oscillator Timing Capacitor

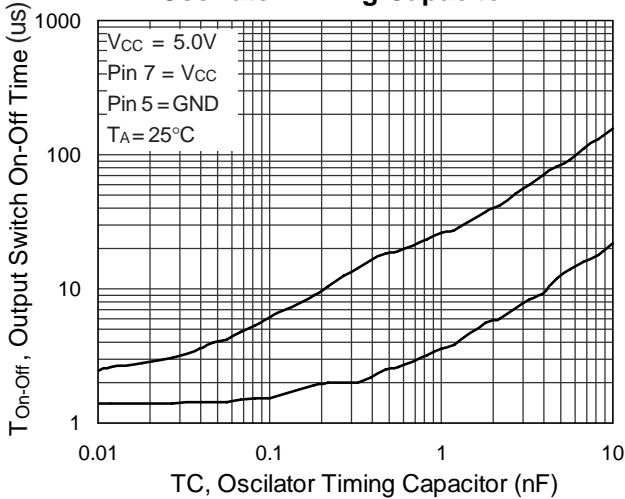


Timing Capacitor Waveform

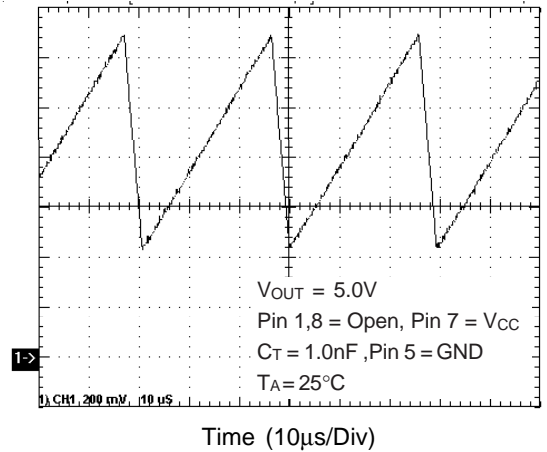


Emitter Follower Configuration Output Saturation Voltage vs. Emitter Current

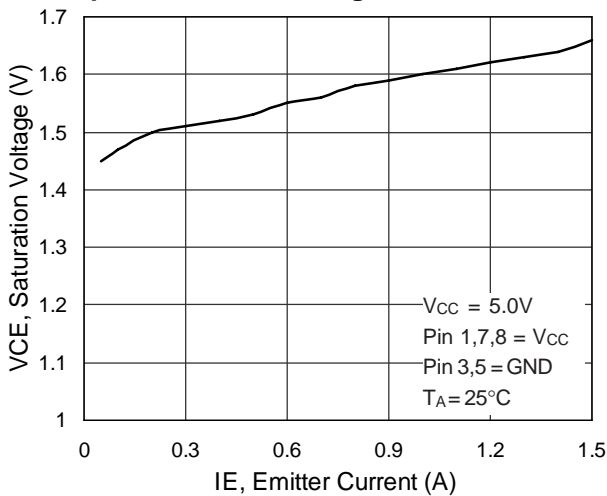


Common Emitter Configuration Output Switch Saturation Voltage vs. Collector Current

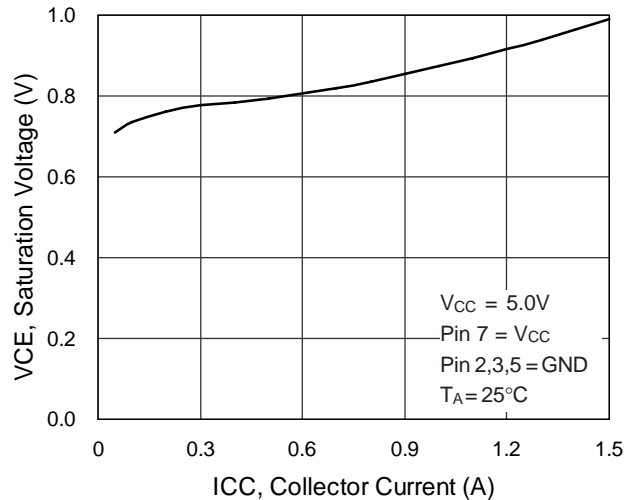

Standby Supply Current vs. Supply Voltage

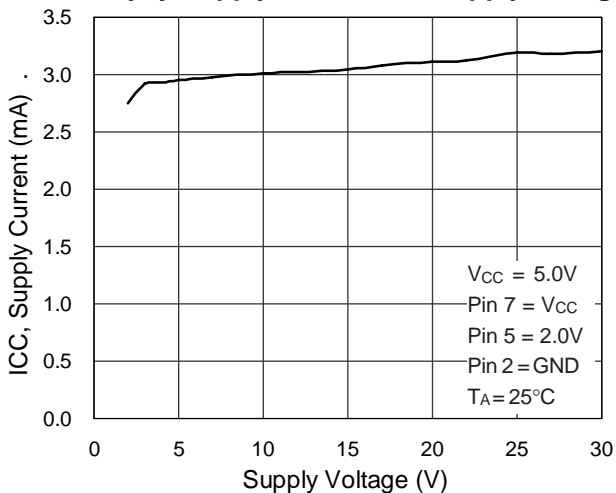


Current Limit Sense Voltage vs. Temperature

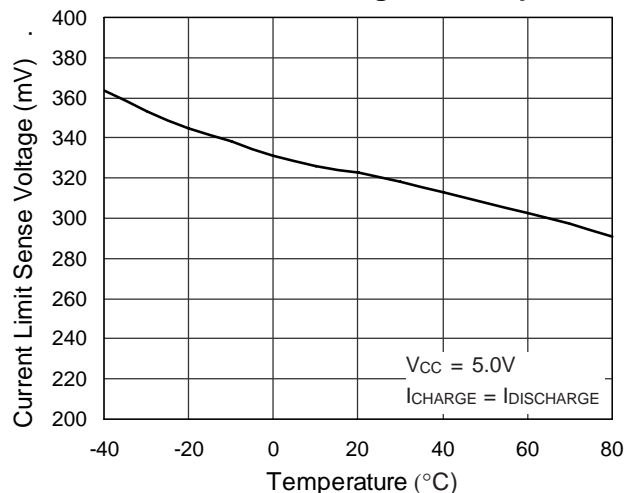


RT34063A




I_C vs. V_{CE(Q1)} Curve

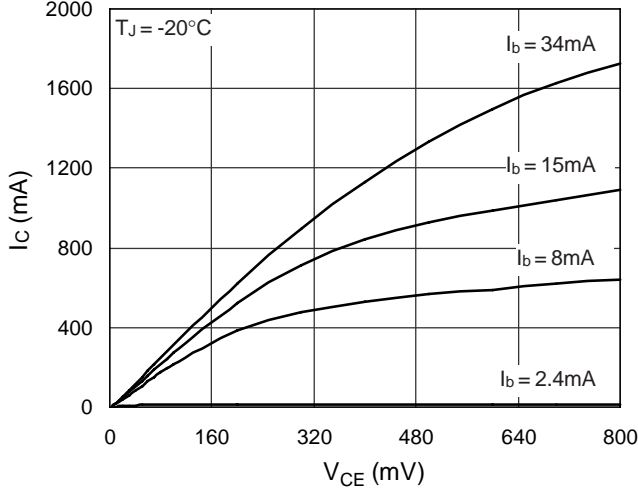


I_C vs. V_{CE(Q1)} Curve

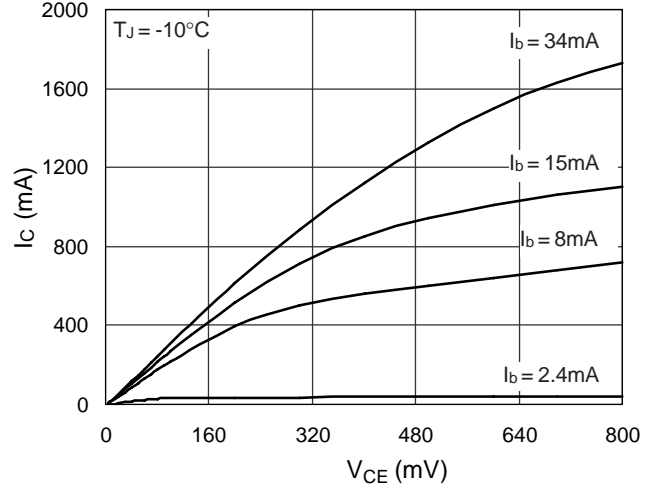


I_C vs. V_{CE(Q1)} Curve

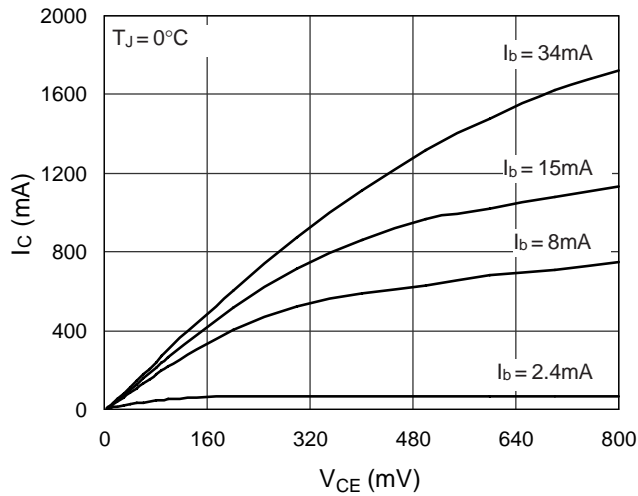

I_C vs. V_{CE(Q1)} Curve

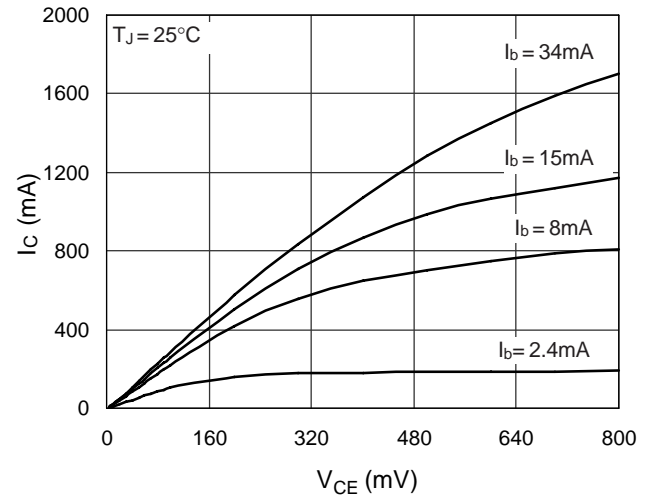


I_C vs. V_{CE(Q1)} Curve

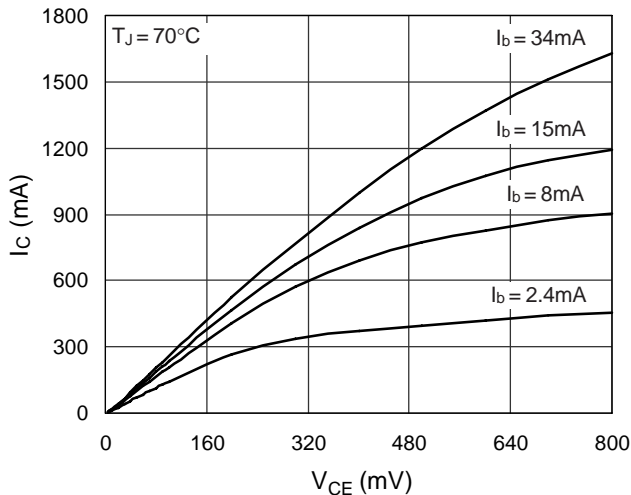

RICHTEK

RT34063A


Outline Dimension

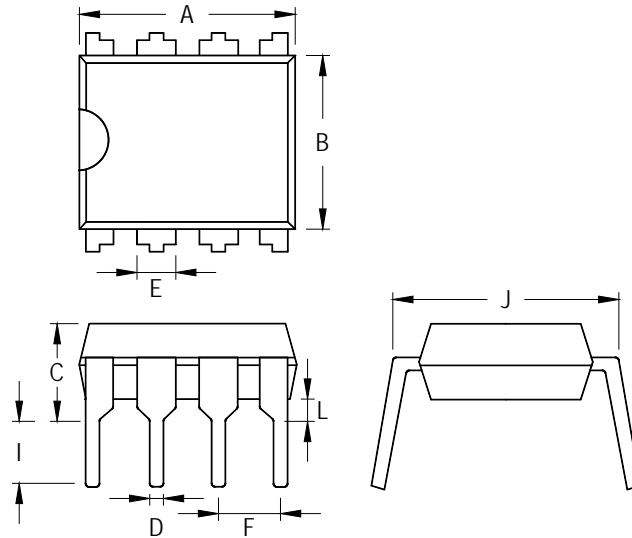

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 9.068 | 9.627 | 0.357 | 0.379 |
| B | 6.198 | 6.604 | 0.244 | 0.260 |
| C | 3.556 | 4.318 | 0.140 | 0.170 |
| D | 0.356 | 0.559 | 0.014 | 0.022 |
| E | 1.397 | 1.651 | 0.055 | 0.065 |
| F | 2.337 | 2.743 | 0.092 | 0.108 |
| I | 3.048 | 3.556 | 0.120 | 0.140 |
| J | 7.366 | 8.255 | 0.290 | 0.325 |
| L | 0.381 | | 0.015 | |

8-Lead DIP Plastic Package

RT34063A

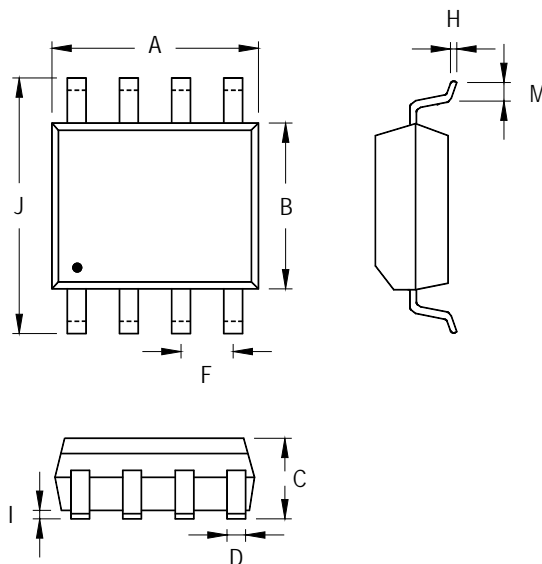

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 4.801 | 5.004 | 0.189 | 0.197 |
| B | 3.810 | 3.988 | 0.150 | 0.157 |
| C | 1.346 | 1.753 | 0.053 | 0.069 |
| D | 0.330 | 0.508 | 0.013 | 0.020 |
| F | 1.194 | 1.346 | 0.047 | 0.053 |
| H | 0.170 | 0.254 | 0.007 | 0.010 |
| I | 0.050 | 0.254 | 0.002 | 0.010 |
| J | 5.791 | 6.200 | 0.228 | 0.244 |
| M | 0.400 | 1.270 | 0.016 | 0.050 |

8-Lead SOP Plastic Package

Richtek Technology Corporation

Headquarter
 5F, No. 20, Taiyuen Street, Chupei City
 Hsinchu, Taiwan, R.O.C.
 Tel: (8863)5526789 Fax: (8863)5526611

Richtek Technology Corporation

Taipei Office (Marketing)
 5F, No. 95, Minchiuan Road, Hsintien City
 Taipei County, Taiwan, R.O.C.
 Tel: (8862)86672399 Fax: (8862)86672377
 Email: marketing@richtek.com

Information that is provided by Richtek Technology Corporation is believed to be accurate and reliable. Richtek reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time. No third party intellectual property infringement of the applications should be guaranteed by users when integrating Richtek products into any application. No legal responsibility for any said applications is assumed by Richtek.