

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)  
[0639010500](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Fine Adjust Applicator for CTX150 Receptacle Terminals

**FineAdjust  
Applicator**

**molex**

**Application Tooling  
Specification Sheet**



**Order No. 63901-0500**

**FEATURES**


- Quick punch removal with the push of a button for fast and easy tooling change
- Applicator designed to industry standard mounting and shut height 135.80mm (5.346")
- Quick set-up time; plus the crimp height, track and feed adjustments can be set without removing the applicator from the press
- Fine adjustment allows users to achieve target with little effort by adjusting in increments of .015mm (.0006") for conductor crimp height and .063mm (.0025") for insulation height
- Independent adjustment rings allow users to quickly adjust the conductor or insulation crimp height without affecting each other
- Directly adapts to most automatic wire processing machines

**SCOPE**

Products: CTX150 Receptacle Terminals, 0.85, 1.00, 1.25mm<sup>2</sup> wires.

| Terminal Series No. | Terminal Order No. |             | Wire Size   |                 | Insulation Diameter |           | Strip Length (Ref.) |           |
|---------------------|--------------------|-------------|-------------|-----------------|---------------------|-----------|---------------------|-----------|
|                     |                    |             | AWG         | mm <sup>2</sup> | mm                  | In.       | mm                  | In.       |
| 502307              | 502307-0112        | 502307-0122 | Metric Only | JASO .85        | 1.80-2.20           | .071-.087 | 4.50-5.00           | .177-.197 |
|                     | 502307-1112        | 502307-1122 | Metric Only | ISO 1           |                     |           |                     |           |
|                     | 502307-2112        | 502307-2122 | Metric Only | JASO 1.25       |                     |           |                     |           |
| 34805               | 34805-0112         |             | Metric Only | JASO .85        | 1.80-2.20           | .071-.087 | 4.50-5.00           | .177-.197 |
|                     |                    |             | Metric Only | ISO 1           |                     |           |                     |           |
|                     |                    |             | Metric Only | JASO 1.25       |                     |           |                     |           |

**DEFINITION OF TERMS**

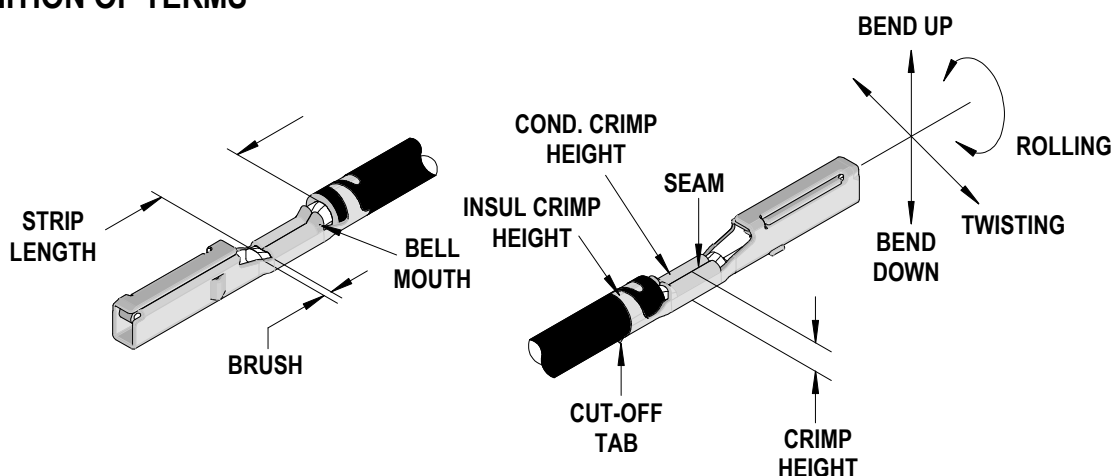

## Fine Adjust Applicator for CTX150 Receptacle Terminals

### CRIMP SPECIFICATION

| Terminal Series No. | Bell mouth |           | Cut-off Tab Maximum |      | * Conductor Brush |           |
|---------------------|------------|-----------|---------------------|------|-------------------|-----------|
|                     | mm         | In.       | mm                  | In.  | mm                | In.       |
| 502307              | 0.20-0.55  | .008-.022 | 0.30                | .012 | 0.20-1.20         | .008-.047 |
| 34805               |            |           |                     |      |                   |           |

\* Wire brush must be flush or below top of Conductor Crimp.

| Terminal Series No. | Bend up   Bend down |     | Twist Roll |   | Punch Width (Ref) |      |            |      | Seam<br>Seam shall not be open and no wire allowed out of the crimping area |
|---------------------|---------------------|-----|------------|---|-------------------|------|------------|------|-----------------------------------------------------------------------------|
|                     |                     |     |            |   | Conductor         |      | Insulation |      |                                                                             |
|                     | Degree              |     | Degree     |   | mm                | In   | mm         | In   |                                                                             |
| 502307              | 1.5                 | 1.5 | 4          | 6 | 2.05              | .081 | 2.30       | .091 |                                                                             |
| 34805               |                     |     |            |   |                   |      |            |      |                                                                             |

After crimping, the crimp profiles should measure the following:

| Terminal<br>Series No. | Wire Size   |                 | Conductor    |           |                      |      | Insulation              |      |                               |      | Pull Force<br>Minimum |      |
|------------------------|-------------|-----------------|--------------|-----------|----------------------|------|-------------------------|------|-------------------------------|------|-----------------------|------|
|                        |             |                 | Crimp Height |           | Crimp Width<br>(Ref) |      | Crimp Height<br>Maximum |      | Crimp Width<br>Maximum (Ref.) |      |                       |      |
|                        | AWG         | mm <sup>2</sup> | mm           | In.       | mm                   | In.  | mm                      | In.  | mm                            | In.  | N                     | Lb.  |
| 502307<br>34805        | Metric Only | JASO .85        | 1.00-1.10    | .039-.043 | 2.05                 | .081 | 2.30                    | .091 | 2.45                          | .097 | 130                   | 29.3 |
|                        | Metric Only | ISO 1           | 1.05-1.15    | .041-.045 | 2.05                 | .081 | 2.50                    | .098 | 2.45                          | .097 | 120                   | 27.0 |
|                        | Metric Only | JASO 1.25       | 1.15-1.25    | .045-.049 | 2.05                 | .081 | 2.60                    | .102 | 2.45                          | .097 | 180                   | 40.5 |

#### ■ Tool Qualification Notes:

1. Pull Force should be measured with no influence from the insulation crimp.
2. The above specifications are guidelines to an optimum crimp.

## Fine Adjust Applicator for CTX150 Receptacle Terminals

## PARTS LIST

| FineAdjust Applicator 63901-0500 |            |                 |                                    |          |
|----------------------------------|------------|-----------------|------------------------------------|----------|
| Item                             | Order No   | Engineering No. | Description                        | Quantity |
| <b>Perishable Tooling</b>        |            |                 |                                    |          |
|                                  | 63901-0570 | 63901-0570      | Tool Kit (All "Y" Items)           | REF      |
| 1                                | 63457-0045 | 63457-0045      | Conductor Punch                    | 1 Y      |
| 2                                | 63455-0056 | 63455-0056      | Conductor Anvil                    | 1 Y      |
| 3                                | 63454-0078 | 63454-0078      | Insulation Punch                   | 1 Y      |
| 4                                | 63456-0052 | 63456-0052      | Insulation Anvil                   | 1 Y      |
| 5                                | 63443-0003 | 63443-0003      | Cut-Off Plunger                    | 1 Y      |
| 6                                | 63443-0012 | 63443-0012      | Front Plunger Retainer             | 1 Y      |
| <b>Other Components</b>          |            |                 |                                    |          |
| 7                                | 11-17-0022 | 1739-21         | Hold Down Spring                   | 1        |
| 8                                | 11-18-4083 | 60707-8         | Feed Guide                         | 1        |
| 9                                | 63443-0009 | 63443-0009      | Scrap Chute                        | 1        |
| 10                               | 63443-0024 | 63443-0024      | Key                                | 1        |
| 11                               | 63443-0090 | 63443-0090      | Wire Stop                          | 1        |
| 12                               | 63443-0093 | 63443-0093      | Shank                              | 1        |
| 13                               | 63443-2209 | 63443-2209      | Coarse Spacer (9.00mm)             | 1        |
| 14                               | 63443-2302 | 63443-2302      | Fine Spacer (3.10mm)               | 1        |
| 15                               | 63443-2804 | 63443-2804      | Front Plunger Striker              | 1        |
| 16                               | 63443-2915 | 63443-2915      | Striker Plunger                    | 1        |
| 17                               | 63443-6119 | 63443-6119      | Rear Cover                         | 1        |
| 18                               | 63600-1057 | 63600-1057      | Striker Plunger Spring             | 1        |
| 19                               | 11-24-1067 | 4996-4          | Cut-off Plunger Spring             | 1        |
| 20                               | 63443-7104 | 63443-7104      | Terminal Hold Down                 | 1        |
| 21                               | 63890-0033 | 63890-0033      | Guide Height Spacer                | 1        |
| 22                               | 63890-0035 | 63890-0035      | Secondary Height Spacer            | 1        |
| <b>Frame</b>                     |            |                 |                                    |          |
| 23                               | 63800-4901 | 63800-4901      | Top                                | 1        |
| 24                               | 63801-3281 | 63801-3281      | Base                               | 1        |
| 25                               | 63801-4650 | 63801-4650      | Track                              | 1        |
| <b>Hardware</b>                  |            |                 |                                    |          |
| 26                               | N/A        | N/A             | M3 by 6 Long SHCS                  | 2**      |
| 27                               | N/A        | N/A             | M3 by 6 Long FHCS                  | 1**      |
| 28                               | N/A        | N/A             | M3 by 8 Long SHCS                  | 1**      |
| 29                               | N/A        | N/A             | M4 by 6 Long SHCS                  | 2**      |
| 30                               | N/A        | N/A             | M4 by 12 Long BHCS                 | 2**      |
| 31                               | N/A        | N/A             | M4 by 50 Long SHCS                 | 2**      |
| 32                               | N/A        | N/A             | M5 by 12 Long SHCS                 | 1**      |
| 33                               | N/A        | N/A             | #10-32 by 3/8" Long Flat Point SSS | 1**      |
| 34                               | N/A        | N/A             | #10-32 Hex Jam Nut                 | 1**      |

\*\* Available from an industrial supply company such as MSC (1-800-645-7270).

Fine Adjust Applicator for CTX150 Receptacle Terminals

**Assembly Drawing**

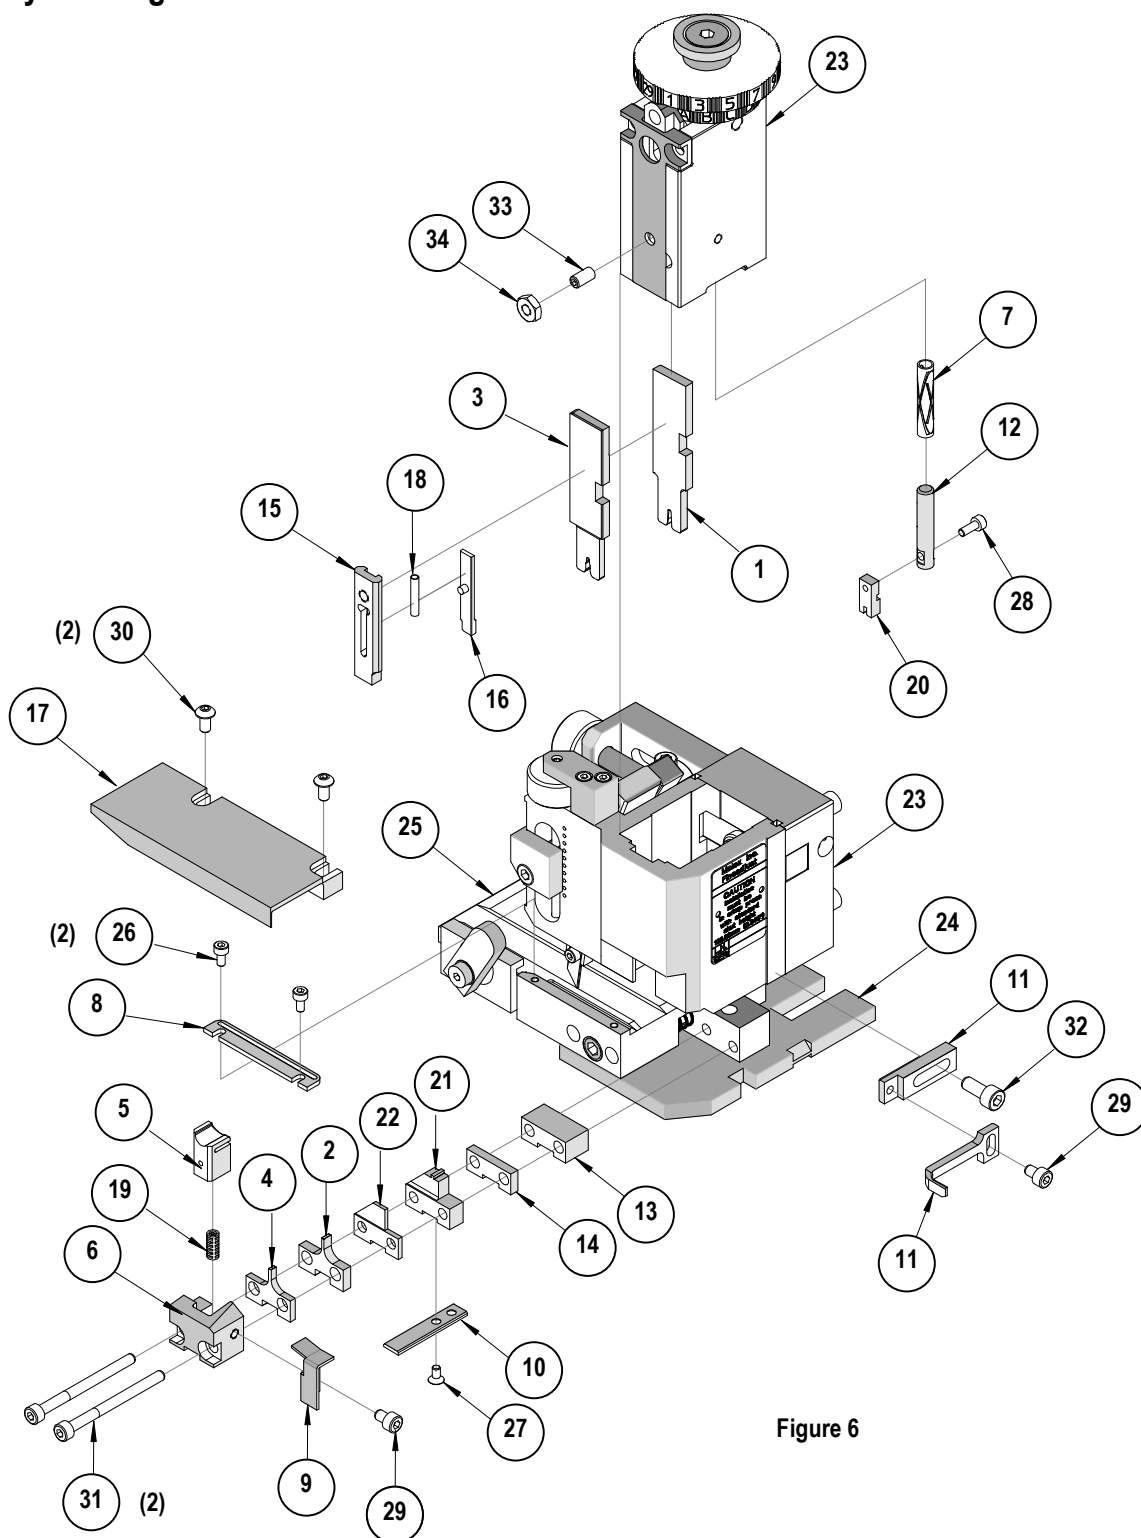


Figure 6

## Fine Adjust Applicator for CTX150 Receptacle Terminals

**NOTES**

1. Molex recommends an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and Applicator before crimping under power. Check that all screws are tight.
3. Slugs, Terminals, Dirt and Oil should be kept clear of work area.
4. Wear safety glasses at all times.
5. For recommended maintenance refer to the FineAdjust Manual.

**CAUTION:** This applicator should only be used in a press with a shut height of 135.80 mm (5.346"). Tooling damage could result at a lower setting.

**CAUTION:** To prevent injury never operate this Applicator without the guards supplied with the press or wire-processing machine in place. Reference the press or wire processing manufacturer's instruction manual.

**CAUTION:** Molex crimp specifications are valid only when used with Molex terminals, applicators and tooling.

<http://www.molex.com>