

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Omron](#)

[G3VM-61VY](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



# MOS FET Relays

**G3VM-61VY**

## Special SOP4-pin package with Dielectric strength AC 3.75 kV

- Trigger LED forward current of 2 mA (maximum) facilitates power saving designs and prolonged battery life.
- Continuous load current of 70 mA.

**RoHS compliant**



Refer to "Common Precautions".

**Note:** The actual product is marked differently from the image shown here.

## ■ Application Examples

- Broadband systems
- Security systems
- Industrial equipment
- Battery powered equipment
- Measurement devices
- Amusement machines

## ■ List of Models


| Package      | Contact form | Terminals                  | Load voltage (peak value)<br>(See the note.) | Model         | Number per stick | Number per tape |
|--------------|--------------|----------------------------|--|---------------|------------------|-----------------|
| Special SOP4 | SPST-NO      | Surface-mounting terminals | 60 V   | G3VM-61VY     | 150              | ---             |
|              |              |                            |  | G3VM-61VY(TR) | ---              | 3,000           |

**Note:** The AC peak and DC value are given for the load voltage.

## ■ Dimensions

**Note:** All units are in millimeters unless otherwise indicated.



**G3VM-61VY**

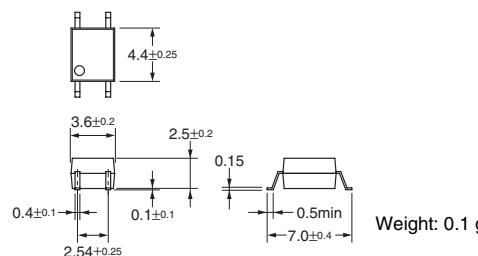

**Note:** The actual product is marked differently from the image shown here.

## ■ Terminal Arrangement/Internal Connections (Top View)


**G3VM-61VY**

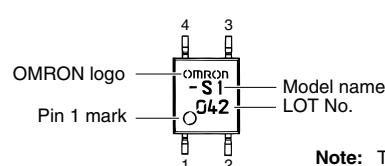

**Note:** The actual product is marked differently from the image shown here.

## ■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

**G3VM-61VY**



**G3VM-61VY ————— OMRON ————— G3VM-61VY**

**■ Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )**


| Item   | Symbol                               | Rating                      | Unit      | Measurement Conditions        |
|--|--------------------------------------|-----------------------------|-----------|-------------------------------|
| Input  | LED forward current                  | $I_F$                       | 50        | mA                            |
|  | Repetitive peak LED forward current  | $I_{FP}$                    | 1         | A                             |
|  | LED forward current reduction rate   | $\Delta I_F/^\circ\text{C}$ | -0.5      | mA/°C                         |
|  | LED reverse voltage                  | $V_R$                       | 5         | V                             |
|  | Connection temperature               | $T_j$                       | 125       | °C                            |
| Output   | Load voltage (AC peak/DC)            | $V_{OFF}$                   | 60        | V                             |
|  | Continuous load current (AC peak/DC) | $I_O$                       | 70        | mA                            |
|  | ON current reduction rate            | $\Delta I_O/^\circ\text{C}$ | -0.7      | mA/°C                         |
|  | Connection temperature               | $T_j$                       | 125       | °C                            |
| Dielectric strength between input and output (See note 1.) | $V_{I-O}$                            | 3,750                       | $V_{rms}$ | AC for 1 min                  |
| Operating temperature                                      | $T_a$                                | -40 to +85                  | °C        | With no icing or condensation |
| Storage temperature  | $T_{stg}$                            | -55 to +125                 | °C        | With no icing or condensation |
| Soldering temperature (10 s)                               | ---                                  | 260                         | °C        | 10 s                          |

**Note:** 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

**■ Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )**

| Item                           | Symbol                                 | Minim-<br>um | Typical | Maxi-<br>mum | Unit | Measurement<br>conditions   |
|--------------------------------|--|--------------|---------|--------------|------|---|
| Input                          | LED forward voltage                    | $V_F$        | 1.0     | 1.15         | 1.3  | V   |
|                                | Reverse current                        | $I_R$        | ---     | ---          | 10   | μA  |
|                                | Capacity between terminals             | $C_T$        | ---     | 30           | ---  | pF  |
|                                | Trigger LED forward current            | $I_{FT}$     | ---     | 0.6          | 2    | mA  |
| Output                         | Maximum resistance with output ON      | $R_{ON}$     | ---     | 25           | 50   | Ω   |
|                                | Current leakage when the relay is open | $I_{LEAK}$   | ---     | 1            | 1000 | nA  |
| Capacity between I/O terminals | $C_{I-O}$                              | ---          | 0.4     | ---          | pF   | $f = 1 \text{ MHz}$ , $V_s = 0 \text{ V}$   |
| Insulation resistance          | $R_{I-O}$                              | 1,000        | ---     | ---          | MΩ   | $V_{I-O} = 500 \text{ VDC}$ , $R_{OH} \leq 60\%$                                  |
| Turn-ON time                   | $t_{ON}$                               | ---          | 1       | 5            | ms   | $I_F = 3 \text{ mA}$ , $R_L = 200 \Omega$ , $V_{DD} = 10 \text{ V}$ (See note 2.) |
| Turn-OFF time                  | $t_{OFF}$                              | ---          | 0.5     | 5            | ms   |   |

**Note:** 2. Turn-ON and Turn-OFF Times



**■ Recommended Operating Conditions**


Use the G3VM under the following conditions so that the Relay will operate properly.

| Item                                 | Symbol   | Minimum | Typical | Maximum | Unit |
|--------------------------------------|----------|---------|---------|---------|------|
| Load voltage (AC peak/DC)            | $V_{DD}$ | ---     | ---     | 48      | V    |
| Operating LED forward current        | $I_F$    | ---     | 3       | 25      | mA   |
| Continuous load current (AC peak/DC) | $I_O$    | ---     | ---     | 60      | mA   |
| Operating temperature                | $T_a$    | -20     | ---     | 65      | °C   |

**■ Engineering Data**

**Load Current vs. Ambient Temperature**

G3VM-61VY

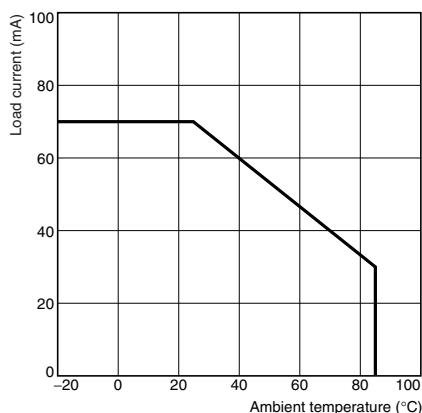

**■ Safety Precautions**

Refer to "Common Precautions" for all G3VM models.