

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Maxim Integrated](#)  
[MAX2687EVKIT#](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

## MAX2687/MAX2689/MAX2694

### GPS/GNSS Low-Noise Amplifiers

#### General Description

The MAX2687/MAX2689/MAX2694 low-noise amplifiers (LNAs) are designed for GPS L1, Galileo, and GLONASS applications. Designed in Maxim's advanced SiGe process, the devices achieve high gain and low noise figure while maximizing the input-referred 1dB compression point and the 3rd-order intercept point. The MAX2687/MAX2689/MAX2694 provide high gains of 12dB, 15dB, and 18dB, respectively. Each is optimized for high linearity.

The devices operate from a +1.6V to +3.6V single supply. The optional shutdown feature in the devices reduces the supply current to less than 10μA. The devices are available in a very small, lead-free, RoHS-compliant, 0.86mm x 0.86mm x 0.65mm wafer-level package (WLP).

#### Features


- ◆ High Power Gain: 17.8dB (MAX2687)
- ◆ Low Noise Figure: 0.85dB (MAX2687)
- ◆ Integrated 50Ω Output Matching Circuit
- ◆ Low Supply Current: 4.5mA (MAX2694)
- ◆ Wide Supply Voltage Range: 1.6V to 3.6V
- ◆ Low Bill of Materials: One Inductor, Two Capacitors
- ◆ Small Footprint: 0.86mm x 0.86mm
- ◆ 0.4mm-Pitch Wafer-Level Package (WLP)

#### Applications

Telematics (Asset Tracking and Management)  
Personal Navigation Devices (PNDs)  
Cellular Phones with GPS  
Notebook PCs/Ultra-Mobile PCs  
Recreational, Marine Navigation  
Avionics  
Watches  
Digital Cameras

*Ordering Information appears at end of data sheet.*

#### Typical Application Circuit

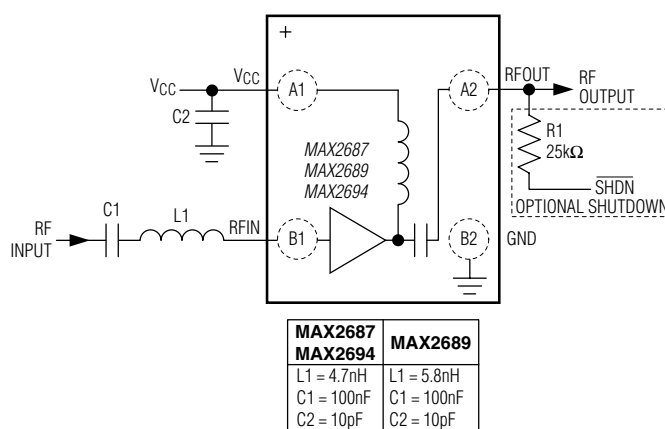

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at [www.maximintegrated.com](http://www.maximintegrated.com).

19-6040; Rev 2; 10/13

# MAX2687/MAX2689/MAX2694

## GPS/GNSS Low-Noise Amplifiers

### ABSOLUTE MAXIMUM RATINGS

|                                                       |                                               |                                               |                 |
|-------------------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------|
| V <sub>CC</sub> to GND.....                           | -0.3V to +3.6V                                | Maximum Current into RF Input .....           | 10mA            |
| Other Pins to GND .....                               | -0.3V to (+ Operating V <sub>CC</sub> + 0.3V) | Operating Temperature Range .....             | -40°C to +85°C  |
| Maximum RF Input Power .....                          | +5dBm                                         | Junction Temperature .....                    | +150°C          |
| Continuous Power Dissipation (T <sub>A</sub> = +70°C) |                                               | Storage Temperature Range.....                | -65°C to +160°C |
| 4-Bump WLP (derates 9.7mW/°C above +70°C) .....       | 776mW                                         | Soldering Temperature (reflow) (Note 1) ..... | +260°C          |

**Note 1:** Refer to Application Note 1891: *Wafer-Level Packaging (WLP) and Its Applications*.



**CAUTION!** ESD SENSITIVE DEVICE

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### PACKAGE THERMAL CHARACTERISTICS (Note 2)

WLP

Junction-to-Ambient Thermal Resistance ( $\theta_{JA}$ ) ..... 103°C/W

**Note 2:** Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maximintegrated.com/thermal-tutorial](http://www.maximintegrated.com/thermal-tutorial).

### DC ELECTRICAL CHARACTERISTICS

(MAX2687/MAX2689/MAX2694 EV kit, V<sub>CC</sub> = 1.6V to 3.6V, T<sub>A</sub> = -40°C to +85°C, no RF signals are applied. Typical values are at V<sub>CC</sub> = 2.85V and T<sub>A</sub> = +25°C, unless otherwise noted.) (Note 3)

| PARAMETER                | CONDITIONS                            |         | MIN | TYP  | MAX  | UNITS |
|--------------------------|---------------------------------------|---------|-----|------|------|-------|
| Supply Voltage           |                                       |         | 1.6 | 2.85 | 3.6  | V     |
| Supply Current           | $\overline{\text{SHDN}}$ = high       | MAX2687 |     | 7.6  |      | mA    |
|                          |                                       | MAX2689 |     | 7.6  |      |       |
|                          |                                       | MAX2694 |     | 4.5  |      |       |
|                          | Shutdown mode, V <sub>SHDN</sub> = 0V |         |     |      | 20   | μA    |
| Digital Input Logic-High | (Note 4)                              |         | 1.2 |      |      | V     |
| Digital Input Logic-Low  | (Note 4)                              |         |     |      | 0.45 | V     |

### AC ELECTRICAL CHARACTERISTICS

(MAX2687/MAX2689/MAX2694 EV kit, V<sub>CC</sub> = 1.6V to 3.6V, T<sub>A</sub> = -40°C to +85°C, f<sub>RFIN</sub> = 1575.42MHz. Typical values are at V<sub>CC</sub> = 2.85V and T<sub>A</sub> = +25°C, unless otherwise noted.) (Note 3)

| PARAMETER    | CONDITIONS                       |         | MIN  | TYP     | MAX | UNITS |
|--------------|----------------------------------|---------|------|---------|-----|-------|
| RF Frequency | L1 band                          |         |      | 1575.42 |     | MHz   |
| Power Gain   | V <sub>CC</sub> = 2.85V (Note 5) | MAX2687 | 14.7 | 17.8    |     | dB    |
|              |                                  | MAX2689 | 12.1 | 15.1    |     |       |
|              |                                  | MAX2694 | 8.9  | 11.6    |     |       |
|              | V <sub>CC</sub> = 1.6V           | MAX2687 | 14.0 | 17.7    |     |       |
|              |                                  | MAX2689 | 11.8 | 15      |     |       |
|              |                                  | MAX2694 | 8.7  | 11.5    |     |       |

# MAX2687/MAX2689/MAX2694

## GPS/GNSS Low-Noise Amplifiers

### AC ELECTRICAL CHARACTERISTICS (continued)

(MAX2687/MAX2689/MAX2694 EV kit,  $V_{CC} = 1.6V$  to  $3.6V$ ,  $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ ,  $f_{RFIN} = 1575.42MHz$ . Typical values are at  $V_{CC} = 2.85V$  and  $T_A = +25^{\circ}C$ , unless otherwise noted.) (Note 3)

| PARAMETER                                   | CONDITIONS                |         | MIN | TYP   | MAX | UNITS |
|---------------------------------------------|---------------------------|---------|-----|-------|-----|-------|
| Noise Figure                                | $V_{CC} = 1.6V$ to $3.3V$ | MAX2687 |     | 0.85  |     | dB    |
|                                             |                           | MAX2689 |     | 1.2   |     |       |
|                                             |                           | MAX2694 |     | 0.97  |     |       |
| In-Band 3rd-Order Input Intercept Point     | (Note 6)                  | MAX2687 |     | 5.5   |     | dBm   |
|                                             |                           | MAX2689 |     | 5.1   |     |       |
|                                             |                           | MAX2694 |     | 6.85  |     |       |
| Out-of-Band 3rd-Order Input Intercept Point | (Note 7)                  | MAX2687 |     | 9.146 |     | dBm   |
|                                             |                           | MAX2689 |     | 8     |     |       |
|                                             |                           | MAX2694 |     | 8.644 |     |       |
| Input 1dB Compression Point                 | (Note 8)                  | MAX2687 |     | -9.3  |     | dBm   |
|                                             |                           | MAX2689 |     | -8.9  |     |       |
|                                             |                           | MAX2694 |     | -2.25 |     |       |
| Input Return Loss                           | MAX2687                   |         |     | 7.8   |     | dB    |
|                                             | MAX2689                   |         |     | 9     |     |       |
|                                             | MAX2694                   |         |     | 16.8  |     |       |
| Output Return Loss                          | MAX2687                   |         |     | 20.7  |     | dB    |
|                                             | MAX2689                   |         |     | 15.2  |     |       |
|                                             | MAX2694                   |         |     | 11.6  |     |       |
| Reverse Isolation                           | MAX2687                   |         |     | 43.9  |     | dB    |
|                                             | MAX2689                   |         |     | 43.3  |     |       |
|                                             | MAX2694                   |         |     | 21.5  |     |       |

**Note 3:** Min and max limits guaranteed by test at  $T_A = +25^{\circ}C$  and guaranteed by design and characterization at  $T_A = -40^{\circ}C$  and  $T_A = +85^{\circ}C$ , unless otherwise noted.

**Note 4:** Min and max limits guaranteed by test at  $T_A = +25^{\circ}C$ .

**Note 5:** Min limit guaranteed by design and characterization.

**Note 6:** Measured with the two tones located at 1MHz and 2MHz offset from the center of the GPS band with -27dBm/tone for the MAX2687, -30dBm/tone for the MAX2689, and -24dBm/tone for the MAX2694.

**Note 7:** Measured with input tones at 1713MHz (-27dBm) and 1851MHz (-39dBm).

**Note 8:** Measured with a tone located at the center of the GPS band.









# MAX2687/MAX2689/MAX2694

## GPS/GNSS Low-Noise Amplifiers

### Typical Operating Characteristics

(MAX2687/MAX2689/MAX2694 EV kit. Typical values are at  $V_{CC} = 2.85V$ ,  $T_A = +25^\circ C$ , and  $f_{RFIN} = 1575.42MHz$ , unless otherwise noted.)

#### MAX2687

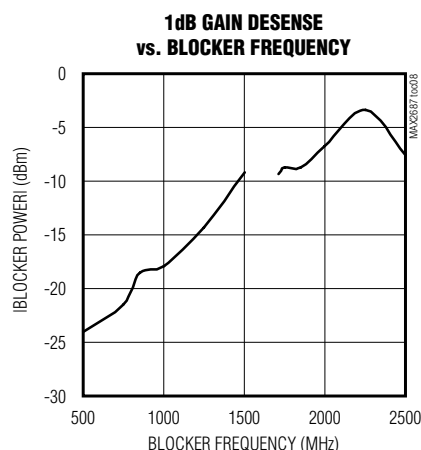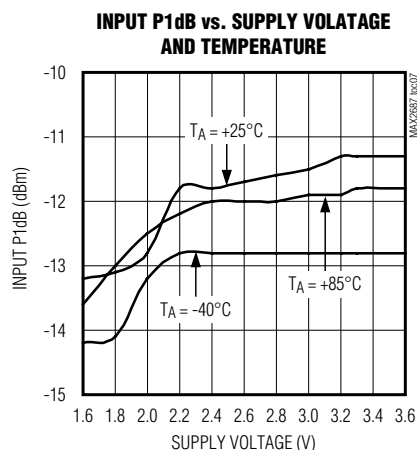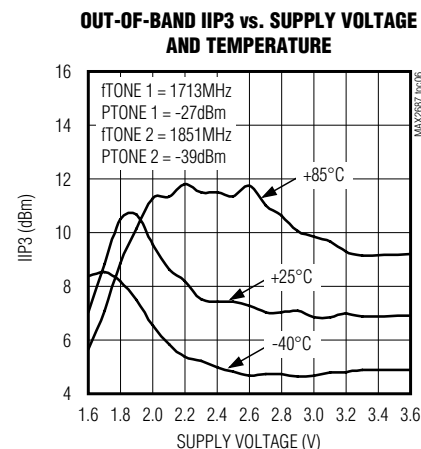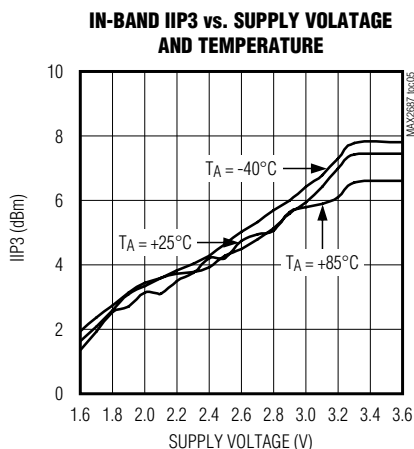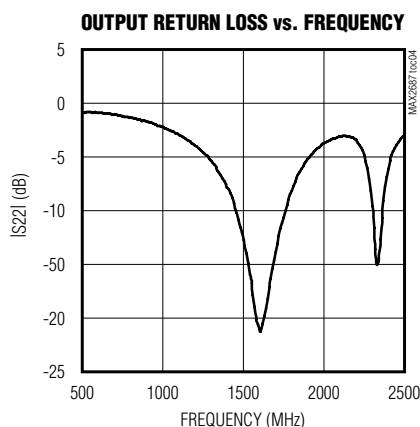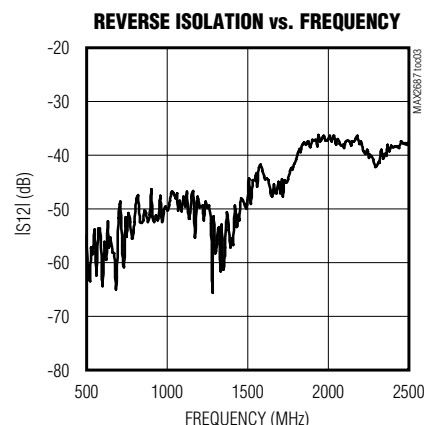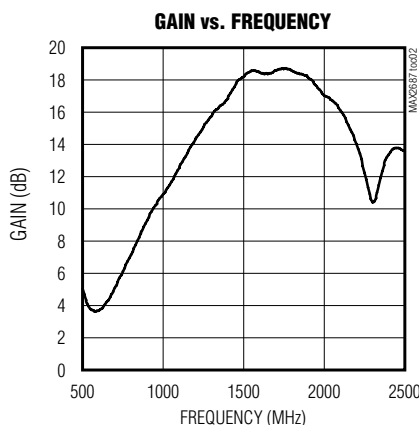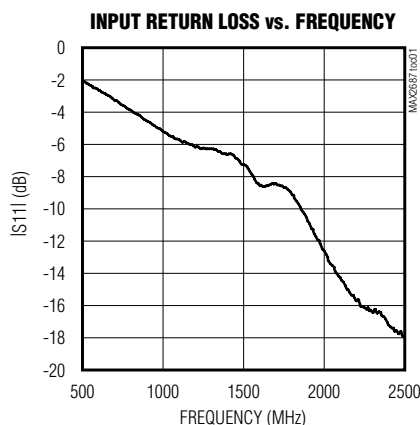


# MAX2687/MAX2689/MAX2694

## GPS/GNSS Low-Noise Amplifiers

### Typical Operating Characteristics (continued)

(MAX2687/MAX2689/MAX2694 EV kit. Typical values are at  $V_{CC} = 2.85V$ ,  $T_A = +25^\circ C$ , and  $f_{RFIN} = 1575.42MHz$ , unless otherwise noted.)

#### MAX2694

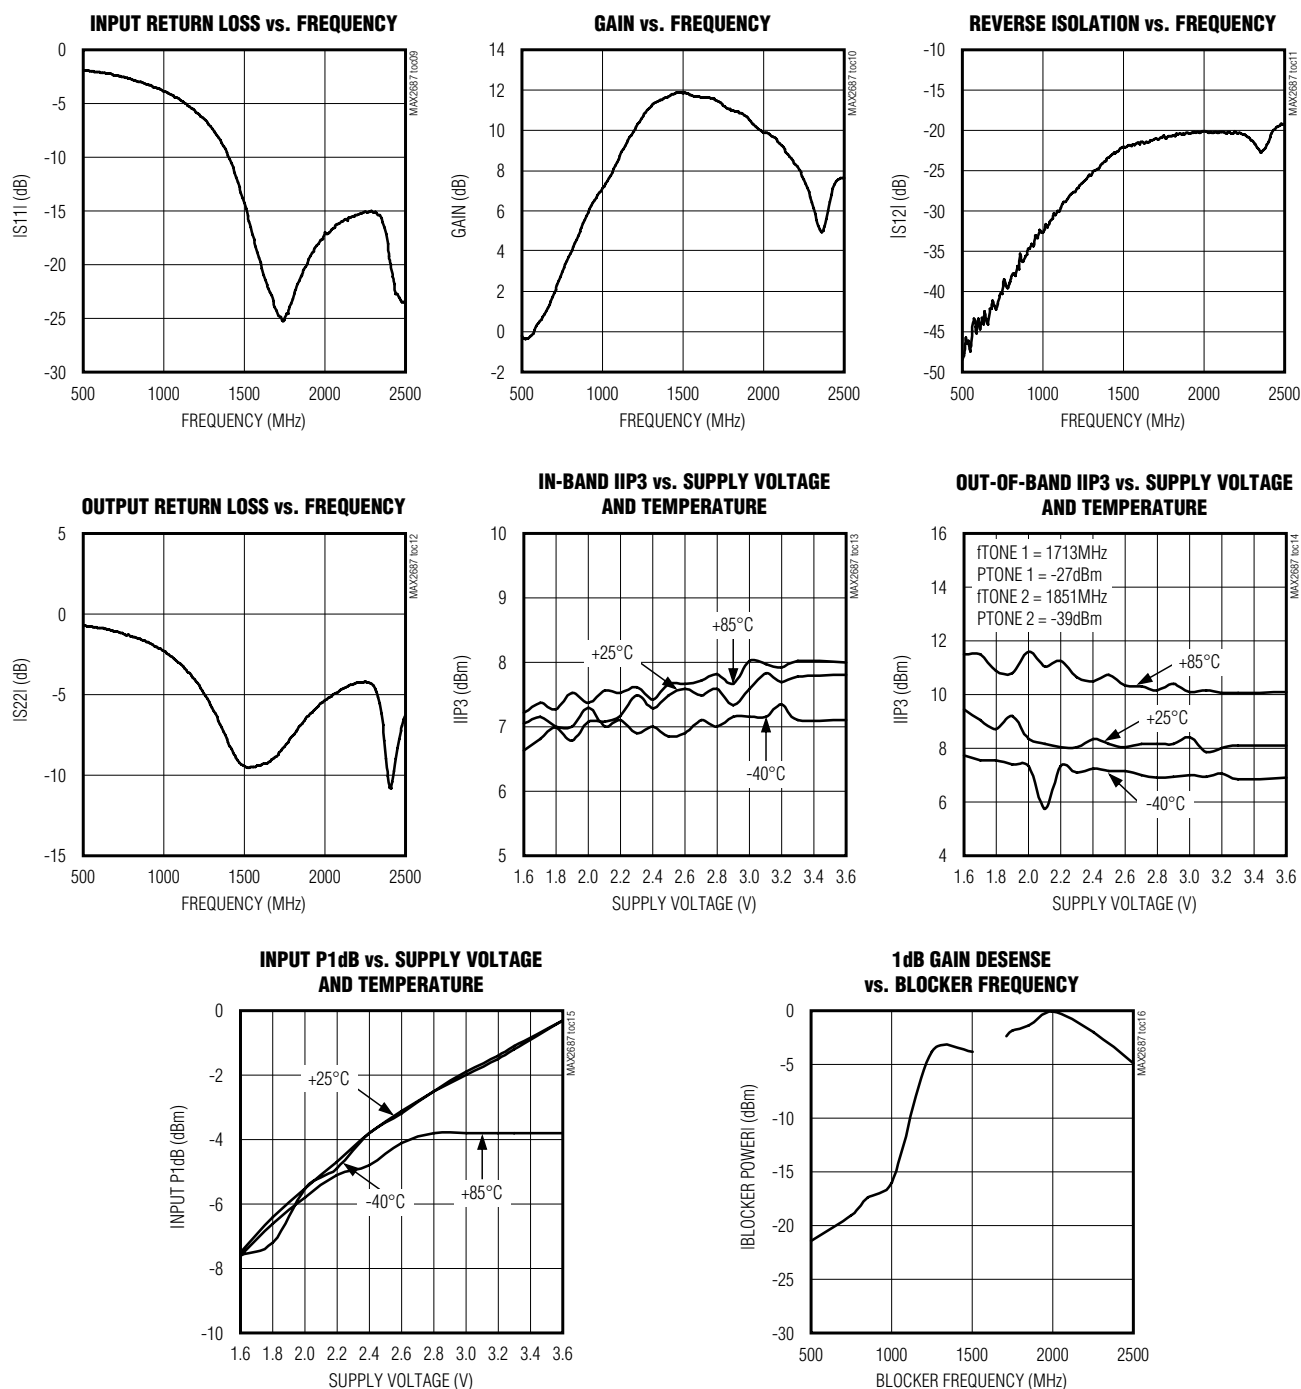









# MAX2687/MAX2689/MAX2694

## GPS/GNSS Low-Noise Amplifiers

### Typical Operating Characteristics (continued)

(MAX2687/MAX2689/MAX2694 EV kit. Typical values are at  $V_{CC} = 2.85V$ ,  $T_A = +25^\circ C$ , and  $f_{RFIN} = 1575.42MHz$ , unless otherwise noted.)


#### MAX2689

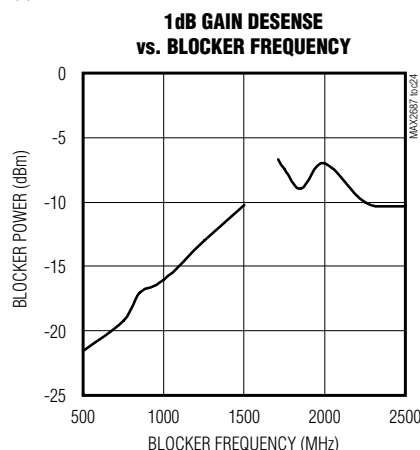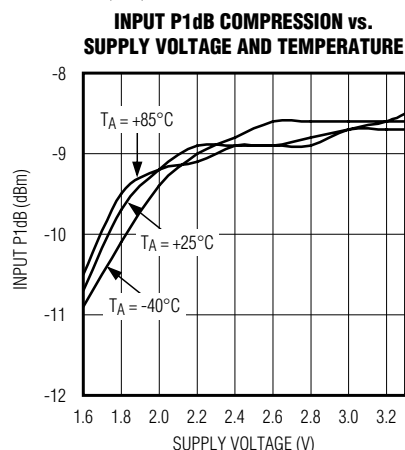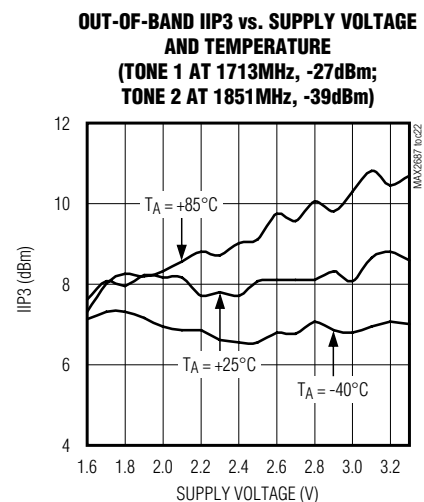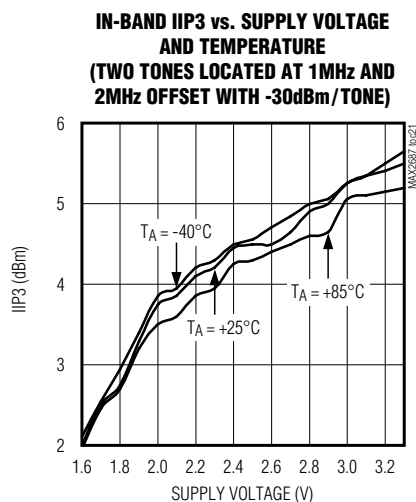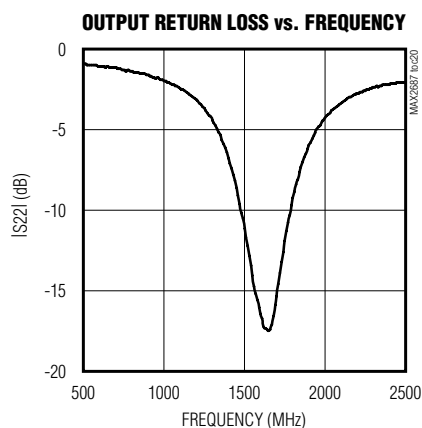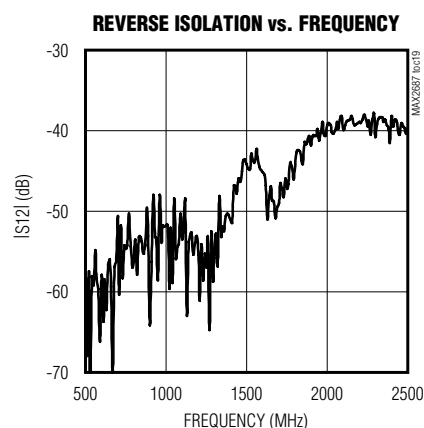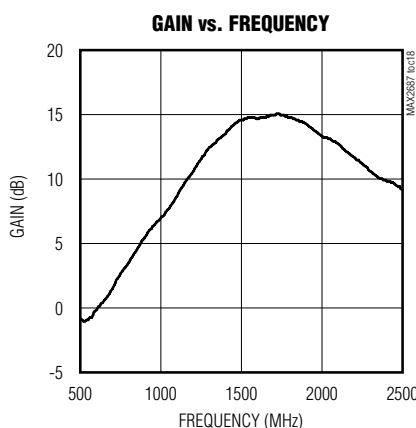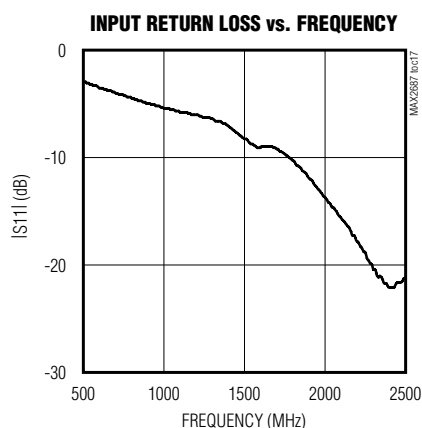

# MAX2687/MAX2689/MAX2694

## GPS/GNSS Low-Noise Amplifiers

### Bump Configuration

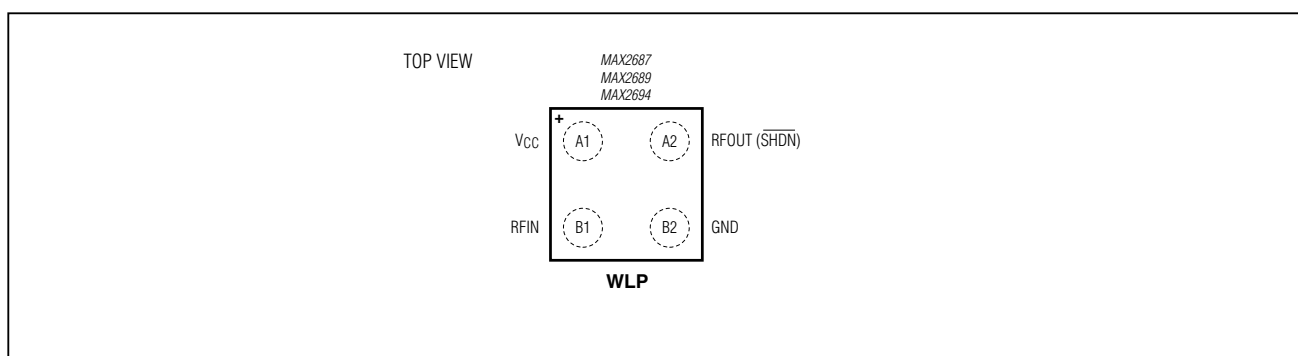

### Bump Description

| BUMP | NAME         | FUNCTION                                                                                                                                                                                                                                                                                    |
|------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A1   | VCC          | Supply Voltage. Bypass to ground with a 10pF capacitor as close as possible to the IC.                                                                                                                                                                                                      |
| A2   | RFOUT (SHDN) | RF Output/SHDN Input. RFOUT is internally matched to 50Ω and pulled up to VCC through a 1MΩ resistor. SHDN is shared with the RFOUT bump. The devices are in active mode by default once VCC is applied. RFOUT(SHDN) can be pulled to a DC low through a 25kΩ resistor to shut down the IC. |
| B1   | RFIN         | RF Input. Requires a DC-blocking capacitor and external matching components.                                                                                                                                                                                                                |
| B2   | GND          | Ground. Connect to the PCB ground plane.                                                                                                                                                                                                                                                    |

### Detailed Description

The MAX2687/MAX2689/MAX2694 are LNAs designed for GPS L1, Galileo, and GLONASS applications. The devices feature an optional power-shutdown control mode to eliminate the need for an external supply switch. The devices achieve high gain, low noise figure, and excellent linearity.

#### Input and Output Matching

The devices require an off-chip input matching. Only an inductor in series with a DC-blocking capacitor is needed to form the input matching circuit. The *Typical Application Circuit* shows the recommended input-matching network. These values are optimized for the best simultaneous gain, noise figure, and return loss performance. The value of the input coupling capacitor

affects IIP3. A smaller coupling capacitor results in lower IIP3. The devices integrate an on-chip output matching to 50Ω at the output, eliminating the need for external matching components. Tables 1 and 2 list typical device S parameters and K<sub>f</sub> values. Typical noise parameters are shown in Tables 3 and 4.

#### Shutdown

The devices include an optional shutdown feature to turn off the entire chip. The devices are placed in active mode by default once VCC is applied, due to the on-chip pullup resistor to VCC at the RFOUT bump (shared with the SHDN input). To shut down the part, apply a logic-low to the RFOUT bump through an external resistor with an adequate value, e.g., 25kΩ, in order not to load the RF output signal during active operation.

# MAX2687/MAX2689/MAX2694

## GPS/GNSS Low-Noise Amplifiers

Table 1. MAX2687 Typical S Parameter Values and K-Factor

| FREQ (MHz) | S11 MAG (dB) | S11 PHASE (DEGREES) | S21 MAG (dB) | S21 PHASE (DEGREES) | S12 MAG (dB) | S12 PHASE (DEGREES) | S22 MAG (dB) | S22 PHASE (DEGREES) | K <sub>f</sub> |
|------------|--------------|---------------------|--------------|---------------------|--------------|---------------------|--------------|---------------------|----------------|
| 1000       | -3.9         | -91.5               | 10.1         | 164.7               | -48.4        | 96.6                | -2.2         | -154.8              | 10.0           |
| 1100       | -4.1         | -97.6               | 11.7         | 152.8               | -51.2        | 47.8                | -2.9         | -175.2              | 14.0           |
| 1200       | -4.4         | -103.6              | 13.3         | 136.5               | -47.3        | 42.2                | -3.9         | 164.0               | 9.6            |
| 1300       | -4.3         | -109.6              | 14.6         | 118.8               | -53.1        | 80.2                | -5.4         | 140.3               | 19.1           |
| 1400       | -4.0         | -116.9              | 15.6         | 102.3               | -55.0        | 152.6               | -7.5         | 112.1               | 23.4           |
| 1500       | -3.9         | -127.1              | 17.0         | 82.1                | -45.7        | 119.1               | -11.7        | 70.7                | 7.6            |
| 1575       | -4.5         | -133.3              | 17.3         | 63.7                | -44.5        | 72.7                | -18.1        | 15.0                | 7.3            |
| 1600       | -4.7         | -133.6              | 17.1         | 56.9                | -46.9        | 36.4                | -20.9        | -18.1               | 10.1           |
| 1700       | -4.2         | -140.0              | 17.1         | 39.7                | -48.8        | 77.8                | -14.7        | -100.3              | 11.4           |
| 1800       | -4.2         | -150.0              | 17.0         | 18.6                | -41.6        | 76.6                | -8.8         | -137.7              | 4.3            |
| 1900       | -4.5         | -159.2              | 16.6         | -1.5                | -39.2        | 39.1                | -5.6         | -168.2              | 2.9            |
| 2000       | -4.8         | -166.3              | 15.5         | -20.2               | -37.6        | 17.5                | -4.0         | 163.7               | 2.3            |

Table 2. MAX2689 Typical S Parameter Values and K-Factor

| FREQ (MHz) | S11 MAG (dB) | S11 PHASE (DEGREES) | S21 MAG (dB) | S21 PHASE (DEGREES) | S12 MAG (dB) | S12 PHASE (DEGREES) | S22 MAG (dB) | S22 PHASE (DEGREES) | K <sub>f</sub> |
|------------|--------------|---------------------|--------------|---------------------|--------------|---------------------|--------------|---------------------|----------------|
| 1000       | -3.8         | -93.0               | 6.0          | 150.9               | -52.1        | 80.8                | -1.9         | -161.7              | 21.6           |
| 1100       | -3.8         | -100.5              | 7.7          | 140.7               | -62.5        | 44.2                | -2.4         | -178.8              | 68.3           |
| 1200       | -4.0         | -107.8              | 9.3          | 124.7               | -53.9        | 19.6                | -3.2         | 164.4               | 26.5           |
| 1300       | -3.9         | -115.5              | 10.8         | 107.7               | -56.2        | 55.3                | -4.3         | 145.5               | 34.8           |
| 1400       | -3.8         | -124.9              | 12.1         | 89.7                | -49.8        | 124.0               | -6.5         | 124.1               | 17.5           |
| 1500       | -4.2         | -133.5              | 13.1         | 65.2                | -43.4        | 53.2                | -11.5        | 113.3               | 9.6            |
| 1575       | -4.2         | -136.3              | 12.9         | 50.7                | -47.2        | 12.5                | -14.7        | 120.9               | 15.6           |
| 1600       | -4.1         | -138.4              | 12.9         | 45.3                | -48.3        | 12.9                | -16.5        | 126.1               | 17.6           |
| 1700       | -3.9         | -146.3              | 13.1         | 25.9                | -51.5        | 74.0                | -16.0        | -177.6              | 24.1           |
| 1800       | -3.8         | -155.2              | 12.7         | 5.3                 | -46.7        | 71.0                | -9.8         | -174.3              | 12.9           |
| 1900       | -3.9         | -163.6              | 12.2         | -13.7               | -42.9        | 43.0                | -6.4         | 171.4               | 7.6            |
| 2000       | -4.0         | -170.6              | 11.2         | -29.8               | -41.6        | 27.0                | -4.5         | 154.6               | 6.1            |

## MAX2687/MAX2689/MAX2694

### GPS/GNSS Low-Noise Amplifiers

**Table 3. MAX2694 Typical S Parameter Values and K-Factor**

| FREQ (MHz) | S11 MAG (dB) | S11 PHASE (DEGREES) | S21 MAG (dB) | S21 PHASE (DEGREES) | S12 MAG (dB) | S12 PHASE (DEGREES) | S22 MAG (dB) | S22 PHASE (DEGREES) | K <sub>f</sub> |
|------------|--------------|---------------------|--------------|---------------------|--------------|---------------------|--------------|---------------------|----------------|
| 1000       | -2.7         | -106.3              | 5.8          | 145.8               | -33.4        | 103.0               | -2.2         | -160.9              | 2.7            |
| 1100       | -3.0         | -117.0              | 7.1          | 133.6               | -31.1        | 95.5                | -2.8         | -179.0              | 2.4            |
| 1200       | -3.4         | -127.6              | 8.5          | 117.1               | -29.0        | 81.3                | -3.8         | 163.5               | 2.1            |
| 1300       | -4.0         | -138.6              | 9.7          | 98.3                | -26.8        | 67.7                | -5.3         | 145.9               | 1.9            |
| 1400       | -4.9         | -149.8              | 10.3         | 79.8                | -24.9        | 55.3                | -7.6         | 130.7               | 1.8            |
| 1500       | -6.2         | -158.2              | 10.8         | 59.9                | -22.9        | 36.8                | -10.8        | 126.6               | 1.6            |
| 1575       | -7.0         | -159.5              | 10.7         | 46.2                | -22.4        | 21.7                | -12.3        | 132.7               | 1.6            |
| 1600       | -7.2         | -160.0              | 10.6         | 41.3                | -22.5        | 17.5                | -12.7        | 134.9               | 1.6            |
| 1700       | -7.7         | -163.0              | 10.6         | 23.5                | -22.0        | 4.0                 | -12.9        | 150.7               | 1.5            |
| 1800       | -8.2         | -164.6              | 10.2         | 6.2                 | -21.3        | -11.5               | -10.3        | 158.0               | 1.4            |
| 1900       | -8.1         | -165.5              | 9.9          | -11.7               | -21.2        | -26.8               | -7.7         | 150.4               | 1.3            |
| 2000       | -7.7         | -167.3              | 9.0          | -27.0               | -20.9        | -42.3               | -5.9         | 137.5               | 1.2            |

**Table 4. MAX2687 Typical Noise Parameters (V<sub>CC</sub> = 2.85V, T<sub>A</sub> = +25°C)**

| FREQUENCY (MHz) | F <sub>MIN</sub> (dB) | Γ <sub>OPT</sub> | Γ <sub>OPT</sub>   ANGLE | R <sub>N</sub> (Ω) |
|-----------------|-----------------------|------------------|--------------------------|--------------------|
| 1550            | 0.69                  | 0.26             | 66                       | 5.28               |
| 1560            | 0.69                  | 0.26             | 66                       | 5.27               |
| 1570            | 0.69                  | 0.26             | 67                       | 5.27               |
| 1575            | 0.69                  | 0.25             | 67                       | 5.26               |
| 1580            | 0.69                  | 0.25             | 67                       | 5.26               |
| 1590            | 0.70                  | 0.25             | 68                       | 5.26               |
| 1600            | 0.70                  | 0.25             | 68                       | 5.25               |

**Table 5. MAX2689 Typical Noise Parameters (V<sub>CC</sub> = 2.85V, T<sub>A</sub> = +25°C)**

| FREQUENCY (MHz) | F <sub>MIN</sub> (dB) | Γ <sub>OPT</sub> | Γ <sub>OPT</sub>   ANGLE | R <sub>N</sub> (Ω) |
|-----------------|-----------------------|------------------|--------------------------|--------------------|
| 1550            | 0.80                  | 0.27             | 73                       | 5.89               |
| 1560            | 0.80                  | 0.27             | 74                       | 5.87               |
| 1570            | 0.81                  | 0.27             | 74                       | 5.86               |
| 1580            | 0.81                  | 0.27             | 75                       | 5.85               |
| 1590            | 0.81                  | 0.27             | 75                       | 5.84               |
| 1600            | 0.81                  | 0.27             | 76                       | 5.83               |

# MAX2687/MAX2689/MAX2694

## GPS/GNSS Low-Noise Amplifiers

Table 6. MAX2694 Typical Noise Parameters ( $V_{CC} = 2.85V$ ,  $T_A = +25^{\circ}C$ )

| FREQUENCY (MHz) | FMIN (dB) | Γ <sub>OPT</sub> | Γ <sub>OPT</sub>   ANGLE | R <sub>N</sub> (Ω) |
|-----------------|-----------|------------------|--------------------------|--------------------|
| 1550            | 0.75      | 0.44             | 48                       | 9.06               |
| 1560            | 0.75      | 0.44             | 48                       | 9.04               |
| 1570            | 0.75      | 0.44             | 48                       | 9.02               |
| 1575            | 0.75      | 0.43             | 49                       | 9.01               |
| 1580            | 0.75      | 0.43             | 49                       | 9.00               |
| 1590            | 0.75      | 0.43             | 49                       | 8.98               |
| 1600            | 0.75      | 0.43             | 49                       | 8.96               |

### Applications Information

A properly designed PCB is essential to any RF micro-wave circuit. Use controlled-impedance lines on all high-frequency inputs and outputs. Bypass VCC with decoupling capacitors located close to the device. For long VCC lines, it may be necessary to add decoupling capacitors. Locate these additional capacitors further away from the device package. Proper grounding of the GND bump is essential. If the PCB uses a topside RF ground, connect it directly to the GND bump. For a board where the ground is not on the component layer, connect the GND bump to the board with multiple vias close to the package.

Refer to [www.maximintegrated.com/datasheet/index.mvp/id/6932/t/do](http://www.maximintegrated.com/datasheet/index.mvp/id/6932/t/do) for the MAX2687/MAX2689/MAX2694 EV kit schematic, Gerber data, PADS layout file, and BOM information.

### Chip Information

PROCESS: SiGe BiCMOS

### Ordering Information

| PART         | TEMP RANGE     | PIN-PACKAGE |
|--------------|----------------|-------------|
| MAX2687EWS+T | -40°C to +85°C | 4 WLP       |
| MAX2689EWS+T | -40°C to +85°C | 4 WLP       |
| MAX2694EWS+T | -40°C to +85°C | 4 WLP       |

+Denotes a lead(Pb)-free/RoHS-compliant package.  
T = Tape and reel.

### Package Information

For the latest package outline information and land patterns (foot-prints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.                               |
|--------------|--------------|-------------------------|------------------------------------------------|
| 4 WLP        | W40A0+1      | <a href="#">21-0480</a> | Refer to <a href="#">Application Note 1891</a> |

# MAX2687/MAX2689/MAX2694

## GPS/GNSS Low-Noise Amplifiers

### Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION                                        | PAGES CHANGED |
|-----------------|---------------|----------------------------------------------------|---------------|
| 0               | 9/11          | Initial release                                    | —             |
| 1               | 5/12          | Added MAX2689 to data sheet                        | All           |
| 2               | 10/13         | Revised <i>AC Electrical Characteristics</i> table | 2             |



Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

**Maxim Integrated 160 Rio Robles, San Jose, CA 95134 USA 1-408-601-1000**

11