

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[IXYS Corporation](#)

[IXSR40N60CD1](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

IXYS


IGBT with Diode ISOPLUS247™ (Electrically Isolated Backside)

IXSR 40N60CD1

$V_{CES} = 600 \text{ V}$
 $I_{C25} = 62 \text{ A}$
 $V_{CE(SAT)} = 2.5 \text{ V}$
 $t_{fi(typ)} = 70 \text{ ns}$

Short Circuit SOA Capability


Preliminary data



Symbol	Test Conditions	Maximum Ratings	
V_{CES}	$T_J = 25^\circ\text{C}$ to 150°C	600	V
V_{CGR}	$T_J = 25^\circ\text{C}$ to 150°C ; $R_{GE} = 1 \text{ M}\Omega$	600	V
V_{GES}	Continuous	± 20	V
V_{GEM}	Transient	± 30	V
I_{C25}	$T_C = 25^\circ\text{C}$, limited by leads	62	A
I_{C90}	$T_C = 90^\circ\text{C}$	37	A
I_{CM}	$T_C = 25^\circ\text{C}$, 1 ms	150	A
SSOA (RBSOA)	$V_{GE} = 15 \text{ V}$, $T_{VJ} = 125^\circ\text{C}$, $R_G = 22 \Omega$ Clamped inductive load, $L = 30 \mu\text{H}$	$I_{CM} = 80$ @ $0.8 V_{CES}$	A
t_{SC} (SCSOA)	$V_{GE} = 15 \text{ V}$, $V_{CE} = 360 \text{ V}$, $T_J = 125^\circ\text{C}$ $R_G = 22 \Omega$, non repetitive	10	μs
P_C	$T_C = 25^\circ\text{C}$	210	W
T_J		-55 ... +150	$^\circ\text{C}$
T_{JM}		150	$^\circ\text{C}$
T_{stg}		-55 ... +150	$^\circ\text{C}$
V_{ISOL}	50/60 Hz, RMS $t = 1 \text{ min}$	2500	V~
Maximum lead temperature for soldering 1.6 mm (0.062 in.) from case for 10 s		300	$^\circ\text{C}$
Weight	PLUS247	5	g

ISOPLUS 247™ (IXSR)

E 153432

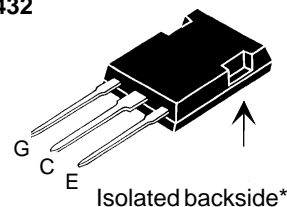

G = Gate, C = Collector,
 E = Emitter

* Patent pending

Features

- DCB Isolated mounting tab
- Meets TO-247AD package Outline
- High current handling capability
- Latest generation HDMOS™ process
- MOS Gate turn-on - drive simplicity

Applications

- Uninterruptible power supplies (UPS)
- Switched-mode and resonant-mode power supplies
- AC motor speed control
- DC servo and robot drives
- DC choppers

Advantages

- Easy assembly
- High power density
- Very fast switching speeds for high frequency applications


Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
BV_{CES}	$I_C = 1 \text{ mA}$, $V_{GE} = 0 \text{ V}$	600		V
$V_{GE(th)}$	$I_C = 4 \text{ mA}$, $V_{CE} = V_{GE}$	4		V
I_{CES}	$V_{CE} = 0.8 \cdot V_{CES}$ $V_{GE} = 0 \text{ V}$ $T_J = 150^\circ\text{C}$			650 μA 5 mA
I_{GES}	$V_{CE} = 0 \text{ V}$, $V_{GE} = \pm 20 \text{ V}$			$\pm 100 \text{ nA}$
$V_{CE(sat)}$	$I_C = I_T$, $V_{GE} = 15 \text{ V}$			2.5 V



IXSR 40N60CD1

Symbol	Test Conditions	Characteristic Values			
		(T _J = 25°C, unless otherwise specified)			
		min.	typ.	max.	
g_{fs}	I _C = I _T ; V _{CE} = 10 V, Pulse test, t ≤ 300 μs, duty cycle ≤ 2 %	16	23	S	
C_{ies}	V _{GS} = 0 V, V _{DS} , 25 V, = f = 1 MHz		3700	pF	
C_{oes}			440	pF	
C_{res}			60	pF	
Q_g	I _C = I _T , V _{GE} = 15 V, V _{CE} = 0.5 V _{CES}		190	nC	
Q_{ge}			45	nC	
Q_{gc}			88	nC	
t_{d(on)}	Inductive load, T_J = 25°C I _C = I _T , V _{GE} = 15 V, L = 100 μH, V _{CE} = 0.8 V _{CES} , R _G = R _{off} = 2.7 Ω Remarks: Switching times may increase for V _{CE} (Clamp) > 0.8 • V _{CES} , higher T _J or increased R _G		50	ns	
t_{ri}			50	ns	
t_{d(off)}			70	140	ns
t_{fi}			70	120	ns
E_{off}			1.0	1.7	mJ
t_{d(on)}	Inductive load, T_J = 125°C I _C = I _T , V _{GE} = 15 V, L = 100 μH V _{CE} = 0.8 V _{CES} , R _G = R _{off} = 2.7 Ω Remarks: Switching times may increase for V _{CE} (Clamp) > 0.8 • V _{CES} , higher T _J or increased R _G		50	ns	
t_{ri}			50	ns	
E_{on}			2.2	mJ	
t_{d(off)}			140	ns	
t_{fi}			140	ns	
E_{off}		1.7	mJ		
R_{thJC}				0.6 K/W	
R_{thCK}		0.15		K/W	

ISOPLUS 247 (IXSR) OUTLINE

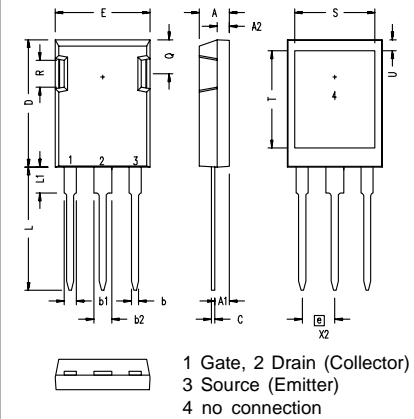

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.83	5.21	.190	.205
A ₁	2.29	2.54	.090	.100
A ₂	1.91	2.16	.075	.085
b	1.14	1.40	.045	.055
b ₁	1.91	2.13	.075	.084
b ₂	2.92	3.12	.115	.123
C	0.61	0.80	.024	.031
D	20.80	21.34	.819	.840
E	15.75	16.13	.620	.635
e	5.45 BSC		.215	BSC
L	19.81	20.32	.780	.800
L1	3.81	4.32	.150	.170
Q	5.59	6.20	.220	.244
R	4.32	4.83	.170	.190
S	13.21	13.72	.520	.540
T	15.75	16.26	.620	.640
U	1.65	3.03	.065	.080

Reverse Diode (FRED)

Symbol	Test Conditions	Characteristic Values		
		(T _J = 25°C, unless otherwise specified)		
		min.	typ.	max.
V_F	I _F = I _T , V _{GE} = 0 V, Pulse test ≤ 300 μs, duty cycle d ≤ 2 %			1.8 V
I_{RM}	I _F = I _T , V _{GE} = 0 V, -di _F /dt = 100 A/μs V _R = 100 V I _F = 1 A; -di _F /dt = 200 A/μs; V _R = 30 V		2	2.5 A
t_{rr}			35	ns
R_{thJC}				1.15 K/W

Note: 1. I_T = 40A