Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

IXYS Corporation
IXTA240N055T

For any questions, you can email us directly:
sales@integrated-circuit.com

Distributor of IXYS Corporation: Excellent Integrated System Limited
Datasheet of IXTA240N055T - MOSFET N-CH 55V 240A TO-263
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

IXYS

Preliminary Technical Information

TrenchMV™ Power MOSFET

IXTA240N055T
IXTP240N055T

V_{DSS}	=	55	V
I_{D25}	=	240	A
$R_{DS(on)}$	≤	3.6	mΩ

N-Channel Enhancement Mode
Avalanche Rated



Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 175°C	55	V
V_{DGR}	T_J = 25°C to 175°C; R_{GS} = 1 MΩ	55	V
V_{GSM}	Transient	± 20	V
I_{D25}	T_C = 25°C	240	A
I_{LRMS}	Lead Current Limit, RMS	75	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}	650	A
I_{AR}	T_C = 25°C	25	A
E_{AS}	T_C = 25°C	1.0	J
dv/dt	$I_S \le I_{DM}$, di/dt ≤ 100 A/µs, $V_{DD} \le V_{DSS}$ $T_J \le$ 175°C, R_G = 5 Ω	3	V/ns
P_D	T_C = 25°C	480	W
T_J		-55 ... +175	°C
T_{JM}		175	°C
T_{stg}		-40 ... +175	°C
T_L	1.6 mm (0.062 in.) from case for 10 s	300	°C
T_{SOLD}	Plastic body for 10 seconds	260	°C
M_d	Mounting torque (TO-220)	1.13 / 10	Nm/lb.in.
Weight	TO-220	3	g
	TO-263	2.5	g

Symbol	Test Conditions (T_J = 25°C unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0 V, I_D = 250 µA	55			V
$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 250 µA	2.0		4.0	V
I_{GSS}	V_{GS} = ± 20 V, V_{DS} = 0 V			± 200	nA
I_{DSS}	V_{DS} = V_{DSS}			5	µA
	V_{GS} = 0 V, T_J = 150°C			250	µA
$R_{DS(on)}$	V_{GS} = 10 V, I_D = 25 A, Notes 1, 2		3.0	3.6	mΩ

TO-263 (IXTA)



TO-220 (IXTP)



G = Gate D = Drain
S = Source TAB = Drain

Features
- Ultra-low On Resistance
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
  - easy to drive and to protect
- 175 °C Operating Temperature

Advantages
- Easy to mount
- Space savings
- High power density

Applications
- Automotive
  - Motor Drives
  - High Side Switch
  - 12V Battery
  - ABS Systems
- DC/DC Converters and Off-line UPS
- Primary- Side Switch
- High Current Switching Applications

© 2006 IXYS CORPORATION All rights reserved

IXYS

IXTA240N055T
IXTP240N055T

Symbol	Test Conditions (T_J = 25°C unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS}= 10 V; I_D =60 A, Note 1	75	132		S
C_{iss}			7600		pF
C_{oss}	V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz		1240		pF
C_{rss}			260		pF
$t_{d(on)}$	**Resistive Switching Times**		39		ns
t_r	V_{GS} = 10 V, V_{DS} = 0.5 V_{DSS}, I_D = 25 A		54		ns
$t_{d(off)}$	R_G = 5 Ω (External)		63		ns
t_f			75		ns
$Q_{g(on)}$			170		nC
Q_{gs}	V_{GS}= 10 V, V_{DS} = 0.5 V_{DSS}, I_D = 25 A		32		nC
Q_{gd}			48		nC
R_{thJC}				0.31	°C/W
R_{thCS}	TO-220		0.50		°C/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0 V			240	A
I_{SM}	Pulse width limited by T_{JM}			650	A
V_{SD}	I_F = 50 A, V_{GS} = 0 V, Note 1			1.2	V
t_{rr}	I_F = 25 A, -di/dt = 100 A/μs V_R = 25 V, V_{GS} = 0 V		70		ns

Notes: 1. Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 %;
2. On through-hole packages, $R_{DS(on)}$ Kelvin test contact location must be 5 mm or less from the package body.

PRELIMINARY TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from data gathered during objective characterizations of preliminary engineering lots; but also may yet contain some information supplied during a pre-production design evaluation. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

IXYS reserves the right to change limits, test conditions, and dimensions.

TO-263AA (IXTA) Outline

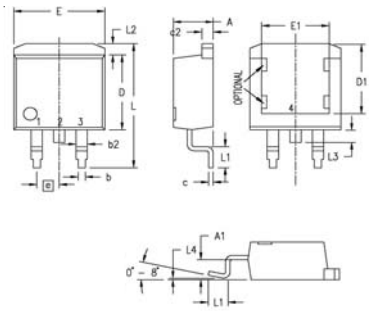

Pins: 1 - Gate 2 - Drain
3 - Source 4, TAB - Drain

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.06	4.83	.160	.190
A1	2.03	2.79	.080	.110
b	0.51	0.99	.020	.039
b2	1.14	1.40	.045	.055
c	0.46	0.74	.018	.029
c2	1.14	1.40	.045	.055
D	8.64	9.65	.340	.380
D1	7.11	8.13	.280	.320
E	9.65	10.29	.380	.405
E1	6.86	8.13	.270	.320
e	2.54	BSC	.100	BSC
L	14.61	15.88	.575	.625
L1	2.29	2.79	.090	.110
L2	1.02	1.40	.040	.055
L3	1.27	1.78	.050	.070
L4	0	0.38	0	.015
R	0.46	0.74	.018	.029

TO-220AB (IXTP) Outline



Pins: 1 - Gate 2 - Drain
3 - Source 4, TAB - Drain

SYM	INCHES MIN	MAX	MILLIMETERS MIN	MAX
A	.170	.190	4.32	4.83
b	.025	.040	0.64	1.02
b1	.045	.065	1.15	1.65
c	.014	.022	0.35	0.56
D	.580	.630	14.73	16.00
E	.390	.420	9.91	10.66
e	.100 BSC		2.54 BSC	
F	.045	.055	1.14	1.40
H1	.230	.270	5.85	6.85
J1	.090	.110	2.29	2.79
k	0	.015	0	0.38
L	.500	.550	12.70	13.97
L1	.110	.230	2.79	5.84
ØP	.139	.161	3.53	4.08
Q	.100	.125	2.54	3.18

IXYS MOSFETs and IGBTs are covered by one or moreof the following U.S. patents: 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585 7,005,734 B2 4,850,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405B2 6,759,692 7,063,975 B2 4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6771478 B2 7,071,537

Fig. 1. Output Characteristics @ 25ºC

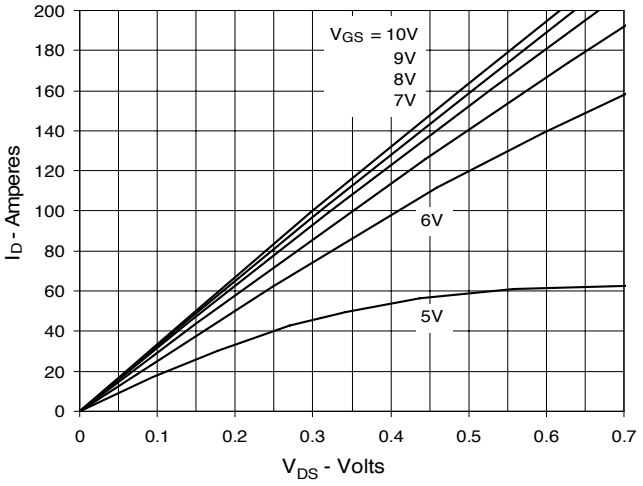

Fig. 2. Extended Output Characteristics @ 25ºC

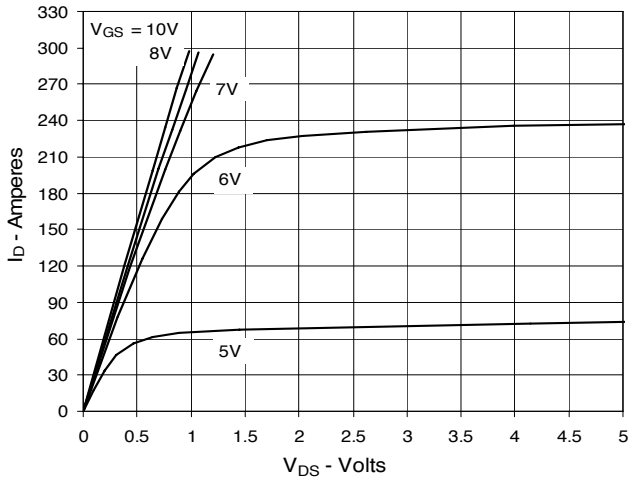

Fig. 3. Output Characteristics @ 150ºC

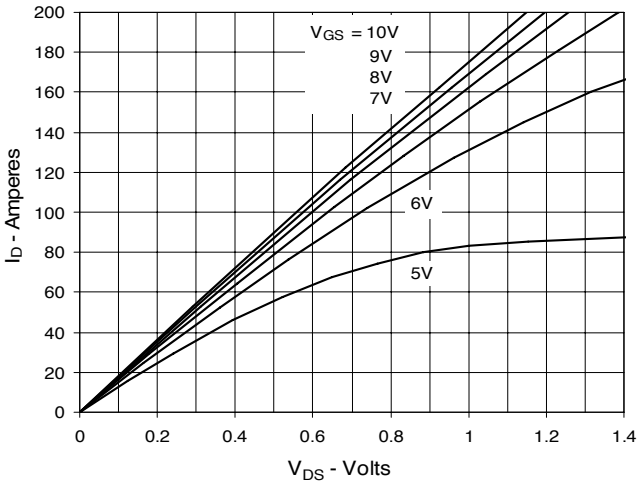

Fig. 4. $R_{DS(on)}$ Normalized to I_D = 120A Value vs. Junction Temperature

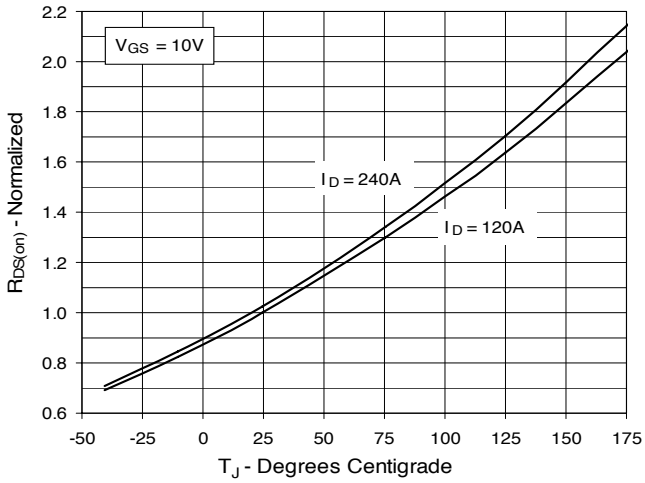

Fig. 5. $R_{DS(on)}$ Normalized to I_D = 120A Value vs. Drain Current

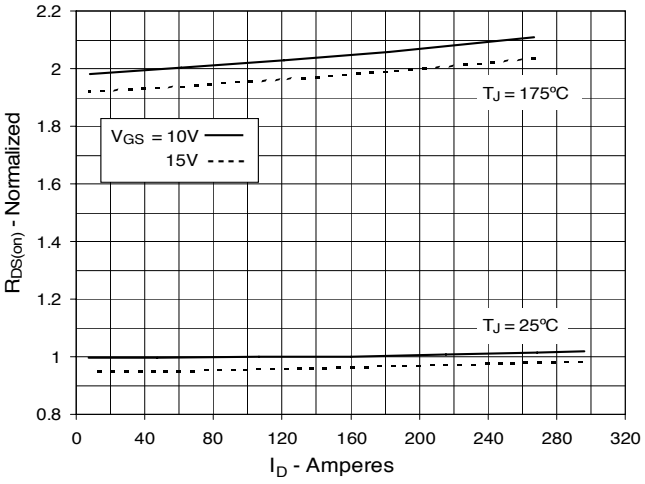

Fig. 6. Drain Current vs. Case Temperature

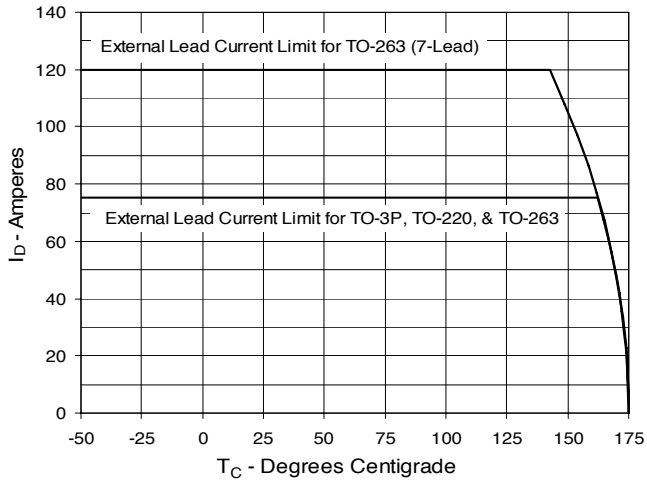

© 2006 IXYS CORPORATION All rights reserved

Fig. 7. Input Admittance

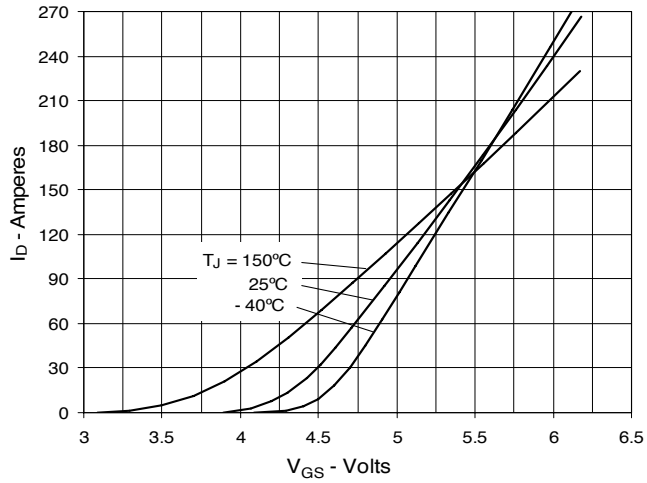

Fig. 8. Transconductance

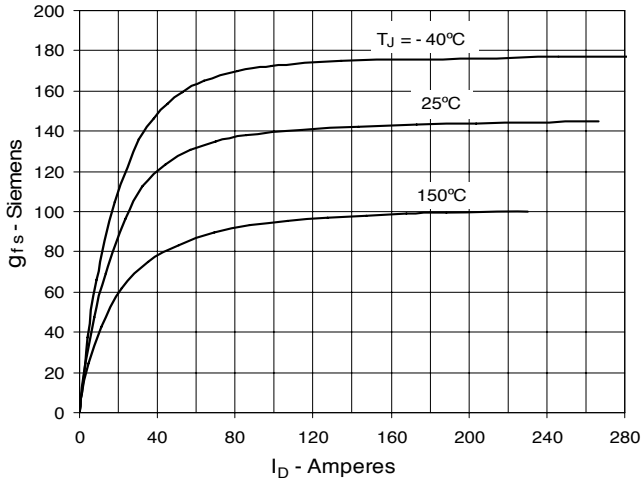

Fig. 9. Forward Voltage Drop of Intrinsic Diode

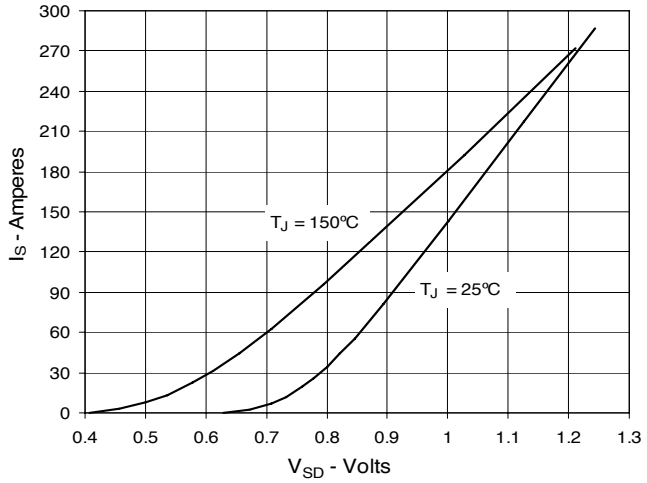

Fig. 10. Gate Charge

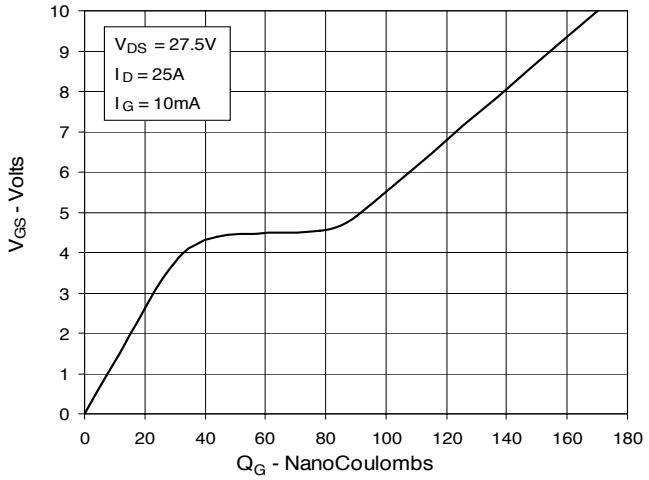

Fig. 11. Capacitance

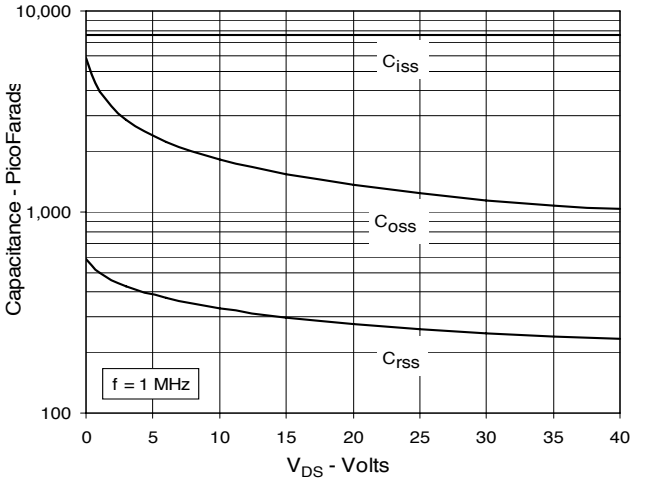

Fig. 12. Maximum Transient Thermal Impedance

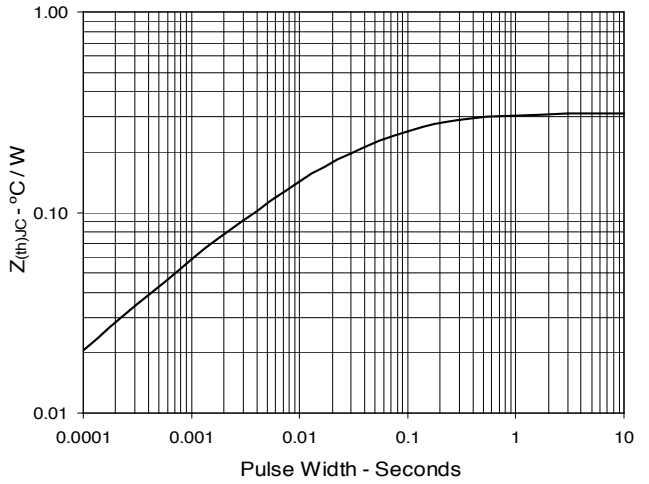

IXYS reserves the right to change limits, test conditions, and dimensions.

Fig. 13. Resistive Turn-on Rise Time vs. Junction Temperature

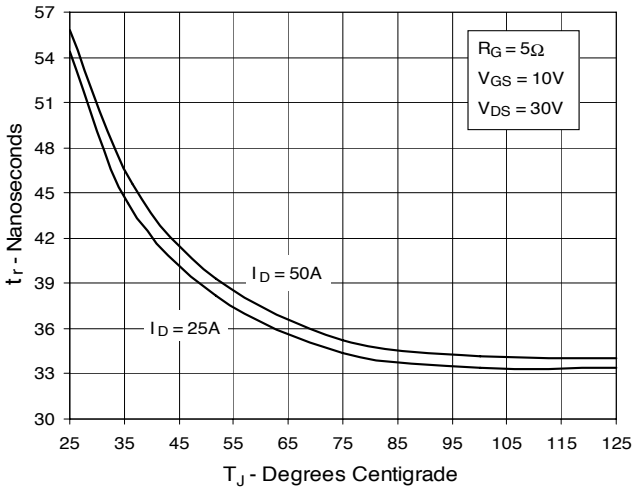

Fig. 14. Resistive Turn-on Rise Time vs. Drain Current

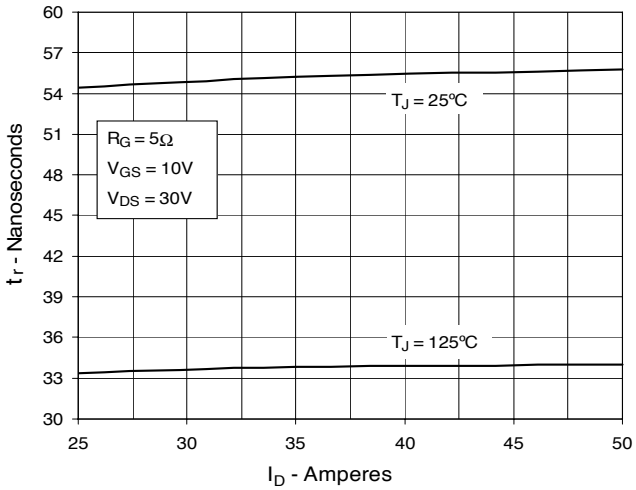

Fig. 15. Resistive Turn-on Switching Times vs. Gate Resistance

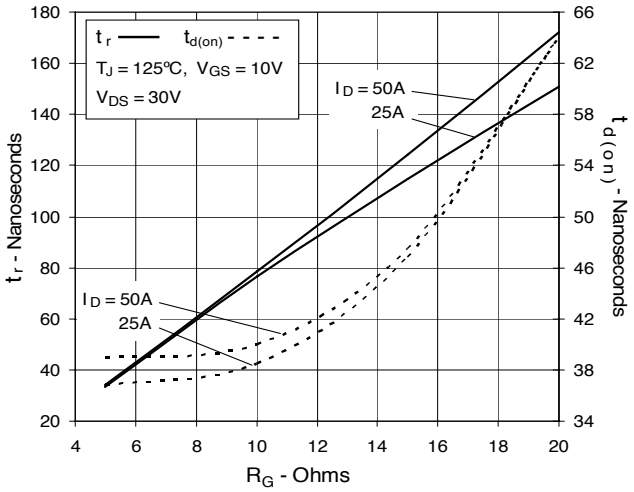

Fig. 16. Resistive Turn-off Switching Times vs. Junction Temperature

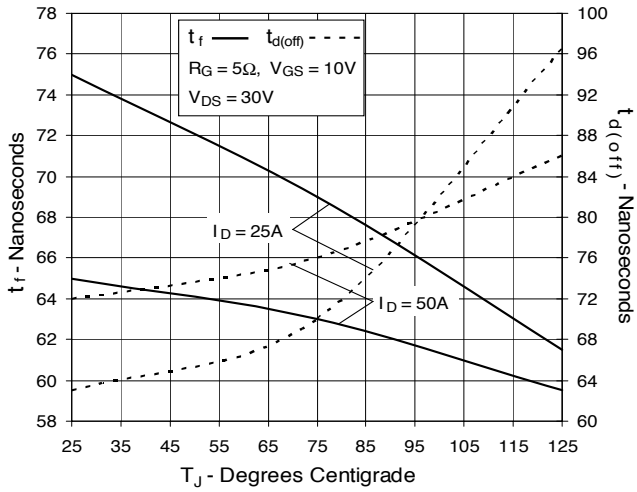

Fig. 17. Resistive Turn-off Switching Times vs. Drain Current

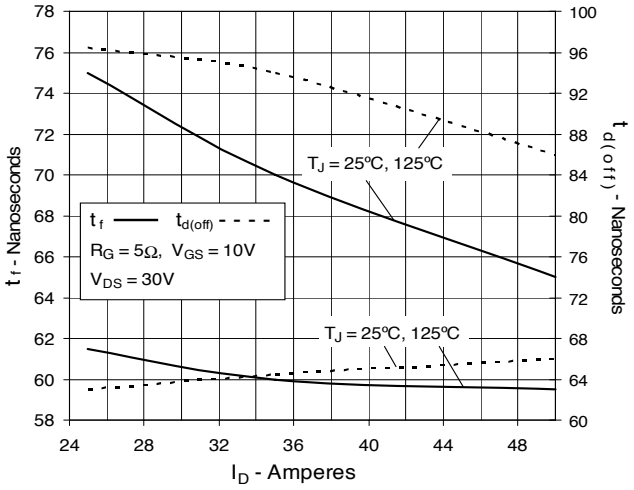

Fig. 18. Resistive Turn-off Switching Times vs. Gate Resistance

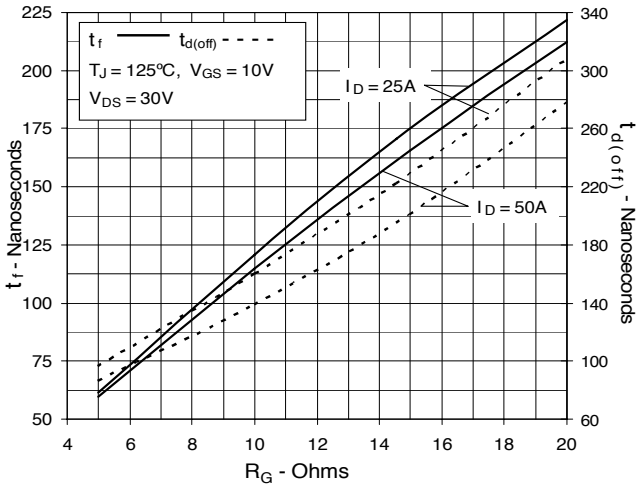

© 2006 IXYS CORPORATION All rights reserved