

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Digilent, Inc.](#)  
[410-219P](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



1300 Henley Court  
Pullman, WA 99163  
509.334.6306  
www.digilentinc.com


## PmodIOXP™ Reference Manual

Revised May 23, 2013

This manual applies to the PmodIOXP rev. A

### Overview

The Digilent PmodIOXP is an Input/Output Expansion module capable of providing up to 19 additional IO pins.

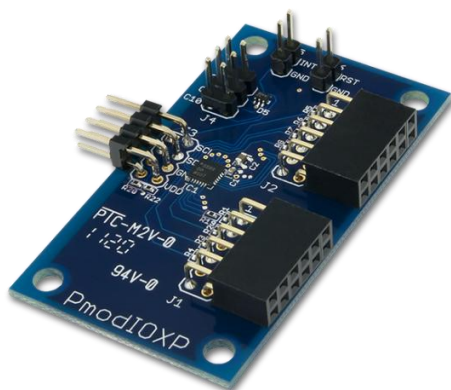

*The PmodIOXP.*

Features include:

- Communicates via the I<sup>2</sup>C interface
- 16-element FIFO for event recording
- 19 configurable I/Os
- Built-in keypad decoding for matrices up to 11×8
- PWM generator
- Open-drain interrupt output
- Two programmable logic blocks
- Debouncing on I/Os

## 1 Functional Description

The PmodIOXP utilizes Analog Devices' ADP5589. Through the use of I<sup>2</sup>C, users may expand from the two I/O pins required to nearly 10 times the amount of available I/O.

## 2 Interfacing with the Pmod

The PmodIOXP communicates with the host board via the I<sup>2</sup>C protocol. By sending out the 7-bit slave address of 0110100 and a read or write bit (1/0), users may then read or write to a specific register to configure the Pmod to enable interrupts or read the status of GPIO pins.

## 2.1 Pinout Description Table

| Pin   | Signal | Description            |
|-------|--------|------------------------|
| 1 & 5 | SCL    | Serial Clock           |
| 2 & 6 | SDA    | Serial Data            |
| 3 & 7 | GND    | Power Supply Ground    |
| 4 & 8 | VCC    | Power Supply (3.3V/5V) |

Any external power applied to the PmodIOXP must be within 1.65V and 3.6V; it is recommended that Pmod is operated at 3.3V.

## 3 Physical Dimensions

The pins on the pin header are spaced 100 mil apart. The PCB is 1.3 inches long on the sides parallel to the pins on the pin header and 2.3 inches long on the sides perpendicular to the pin header.