

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[IXYS Corporation](#)

[UGE1112AY4](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



UGE 1112 AY4

High Voltage Rectifiers

$V_{RRM} = 8000\text{ V}$

$I_{F(AV)M} = 4.2\text{ A}$

V_{RRM} V	Standard Types	Power Designation
8000	UGE 1112 AY4	Si-E 3000 / 1300-2.5



Symbol	Conditions	Ratings	
$I_{F(RMS)}$		7	A
$I_{F(AV)M}$	air self cooling, $T_{amb} = 45^{\circ}\text{C}$		
	- without cooling plate	2.0	A
	- with colling plate	2.5	A
	forced air cooling: $v = 3\text{ m/s}$, $T_{amb} = 35^{\circ}\text{C}$		
	- without cooling plate	3.2	A
	- with cooling plate	4.1	A
	oil cooling, $T_{amb} = 35^{\circ}\text{C}$		
	- without cooling plate	4.2	A
	- with cooling plate	4.2	A
P_{RSM}	$T_{(vj)} = 150^{\circ}\text{C}$; $t_p = 10\ \mu\text{s}$	2.5	kW
I_{FSM}	non repetitive, 50 c/s (for 60 c/s add 10%)		
	$T_{(vj)} = 45^{\circ}\text{C}$; $t_p = 10\text{ ms}$	120	A
	$T_{(vj)} = 150^{\circ}\text{C}$; $t_p = 10\text{ ms}$	100	A
T_{amb}		-40...+150	$^{\circ}\text{C}$
T_{stg}		-40...+150	$^{\circ}\text{C}$
$T_{(vj)}$		150	$^{\circ}\text{C}$
Weight		122	g

Features

- Hermetically sealed Epoxy
- Use in oil
- Avalanche characteristics

Applications


- X-Ray equipment
- Electrostatic dust precipitators
- Electronic beam welding
- Lasers
- Cable test equipment

Advantages

- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits
- Series and parallel operation

Symbol	Conditions	Characteristic Values	
I_R	$T_{(vj)} = 150^{\circ}\text{C}$; $V_R = V_{RRM}$	≤ 1	mA
V_F	$I_F = 7\text{ A}$ $T_{(vj)} = 25^{\circ}\text{C}$	6.25	V
V_{TO}	$T_{(vj)} = 150^{\circ}\text{C}$	4.25	V
r_T	$T_{(vj)} = 150^{\circ}\text{C}$	0.215	m Ω
a	f = 50Hz	5 x 9,81	m/s ²
M_d		8	Nm

Dimensions in mm (1 mm = 0.0394")

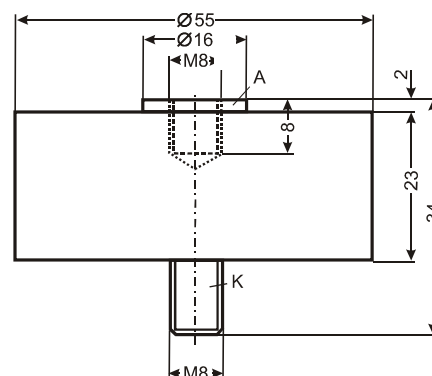

Data according to IEC 60747-2

IXYS reserve the right to change limits, test conditions and dimensions.

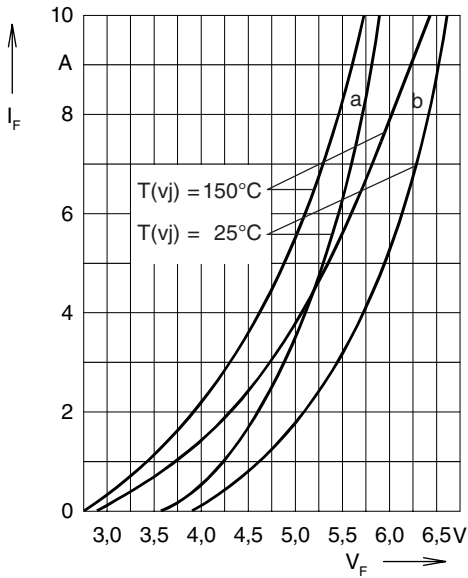


Fig. 1: Forward characteristics

Instantaneous forward current I_F as a function of instantaneous forward voltage drop V_F for junction temperature $T_{(vj)} = 25^\circ\text{C}$ and $T_{(vj)} = 150^\circ\text{C}$
 a = Mean value characteristic
 b = Limit value characteristic

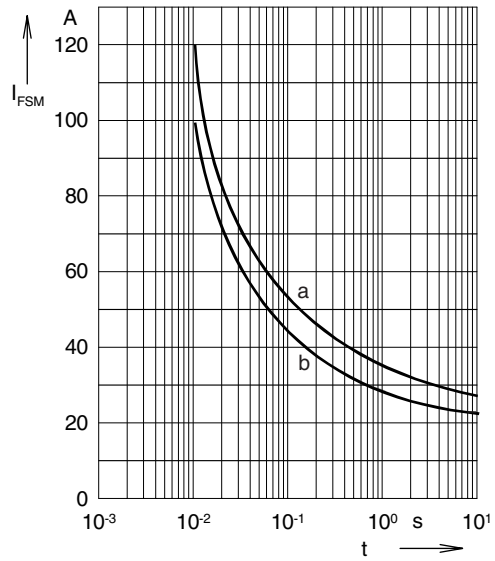


Fig. 2: Characteristics of maximum permissible current

The curves show the non repetitive peak one cycle surge forward current I_{FSM} as a function of time t and serve for rating protective devices.

a = Initial state $T_{(vj)} = 45^\circ\text{C}$
 b = Initial state $T_{(vj)} = 150^\circ\text{C}$

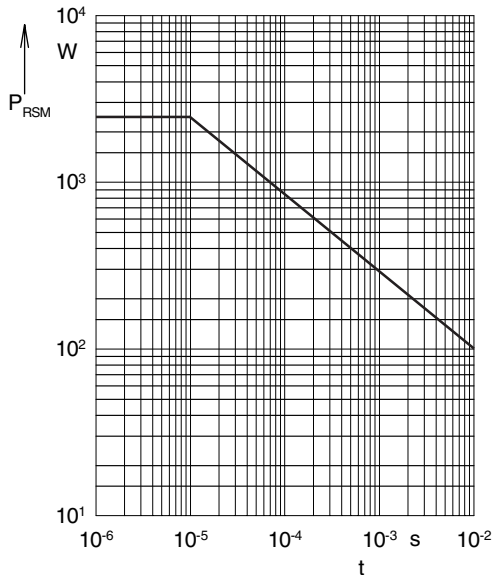


Fig. 3: Power loss

Non repetitive peak reverse power loss P_{RSM} as a function of time t , $T_{(vj)} = 150^\circ\text{C}$

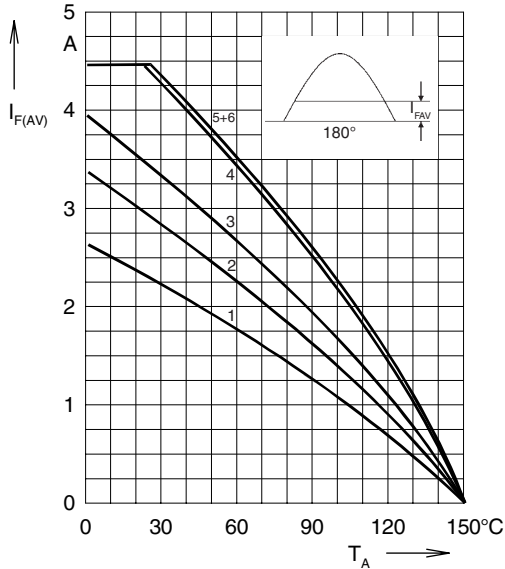


Fig. 4: Load diagramm

Mean forward current $I_{F(AV)}$ of one module for a sine half wave for various cooling modes as a function of the cooling medium temperature T_{amb} for a resistive load (horizontal mounting).

Cooling modes

- | | | |
|------------------------|---------|---------------|
| 1 = air self cooling | without | cooling plate |
| 2 = air self cooling | with | cooling plate |
| 3 = forced air cooling | without | cooling plate |
| 4 = forced air cooling | with | cooling plate |
| 5 = oil cooling | without | cooling plate |
| 6 = oil cooling | with | cooling plate |