

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Hammond Manufacturing](#)
[124A](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Tube Driver - Interstage 124 Series

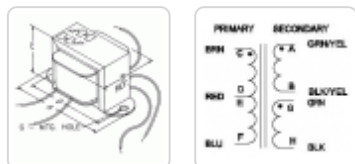

Features

- Designed for general purpose or replacement use in push-pull or phase inverter tube driver circuits.
- Should not be used for single ended applications. They have no gap for DC bias current present in SE mode.
- Open style with minimum 5" long primary leads.
- Minimum frequency response 150 Hz. - 15 Khz (+/- 1db max. ref. 1 Khz.) at full rated power.
- Our part number **124B** is the same as our **124A** except for 49% Nickel laminations for greater fidelity.
- Our part number **124C** (below) is the COIL ONLY (for those experimenters who want to use their own "iron").
- If you are looking to replace Radiola III-A audio transformers, check out our **universal radiola replacement unit**.

Hookup Data

- For Parallel connected operation (33.8K Ohm Secondary):
 - Connect the GRN/YEL wire to the GRN wire AND the BLK/YEL wire to the BLK wire.
- For Series connected operation (135K Ohm Secondary):
 - Connect the BLK/YEL wire to the GRN (this becomes the center tap) - GRN/YEL and BLK wires are the output.

Part No.	Primary				Secondary		Winding	Laminations	Dimensions				G Mtg Hole
	Audio Watts	D.C.	D.C.	Resistance	Resistance	A			B	C	D		
		Impedance	Impedance										
	(Ohms)	(Ohms)	(Ohms)	(Ohms)									
124A	5	10K	403	90K C.T.	1524	C.T.	Grain Oriented Steel	2.38	1.35	1.43	2.00	0.19	
124B	5	10K	403	90K C.T.	1500	C.T.	49% Nickel	2.38	1.35	1.43	2.00	0.19	
124C	5	10K	403	90K C.T.	1524	C.T.	None-Coil Only	-	-	-	-	-	
124D	5	7K C.T.	454	15.8K C.T.	681	C.T.	Grain Oriented Steel	2.81	1.46	1.68	2.38	0.19	
124E	5	15K C.T.	728	33.8K/135K	3880	Dual	Grain Oriented Steel	2.88	1.74	2.37	2.38	0.19	
124F	5	15K C.T.	900	3.75K / 15K	899.6	Dual	Grain Oriented Steel	2.88	1.75	2.37	2.38	0.19	

Data subject to change without notice

