

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bourns Inc.](#)
[TISP1120F3DR-S](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



TISP1120F3D

DUAL FORWARD-CONDUCTING UNIDIRECTIONAL THYRISTOR OVERVOLTAGE PROTECTOR

TISP1120F3D Overvoltage Protector

Ion-Implanted Breakdown Region
 - Precise and Stable Voltage

Planar Passivated Junctions
 - Low Off-State Current $<10\ \mu\text{A}$


Low Voltage Overshoot Under Surge

Device Name	V_{DRM} V	$V_{(\text{BO})}$ V
TISP1120F3D	-97	-120

Rated for International Surge Wave Shapes


Wave Shape	Standard	I_{PPSM} A
2/10	GR-1089-CORE	120
8/20	IEC 61000-4-5	70
10/160	TIA-968-A	60
10/700	ITU-T K.20/21/45	50
10/560	TIA-968-A	45
10/1000	GR-1089-CORE	35

8-SOIC Package (Top View)

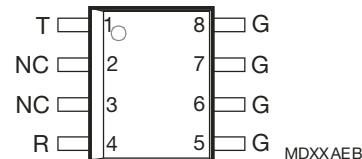

NC - No internal connection

Device Symbol

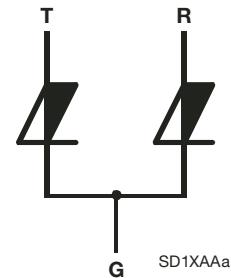

Description

This dual forward-conducting unidirectional overvoltage protector is designed for the overvoltage protection of ICs used for the SLIC (Subscriber Line Interface Circuit) function. The IC line driver section is typically powered with 0 V and a negative supply. The TISP1120F3D limits voltages that exceed these supply rails.

High voltages can occur on the line as a result of exposure to lightning strikes and a.c. power surges. Negative transients are initially limited by breakdown clamping until the voltage rises to the breakdown level, which causes the device to crowbar. The high crowbar holding current helps prevent d.c. latchup as the current subsides. Positive transients are limited by diode forward conduction. These protectors are designed to suppress and withstand the listed international lightning surges on any terminal pair.

This monolithic protection device is fabricated in an ion-implanted planar structure to ensure precise and matched breakdown control, and is virtually transparent to the system in normal operation.

How to Order

Device	Package	Carrier	Order As	Marking Code	Standard Quantity
TISP1120F3D	8-SOIC	Embossed Tape Reeled	TISP1120F3DR-S	1120F3	2500

TISP1120F3D Overvoltage Protector



Absolute Maximum Ratings, $T_A = 25^\circ\text{C}$ (Unless Otherwise Noted)

Rating	Symbol	Value	Unit
Repetitive peak off-state voltage	V_{DRM}	-97	V
Non-repetitive peak current (see Note 1)			
2/10 μs (GR-1089-CORE, 2/10 μs voltage wave shape)		$2 \times \pm 120$	
8/20 μs (IEC 61000-4-5, combination wave generator, 1.2/50 μs voltage waveshape)		$2 \times \pm 70$	
10/160 μs (TIA-968-A, 10/160 μs voltage wave shape)		$2 \times \pm 60$	
5/310 μs (ITU-T K.44, 10/700 μs voltage wave shape used in K.20/21/45)		$2 \times \pm 50$	
5/320 μs (TIA-968-A, 9/720 μs voltage waveshape)		$2 \times \pm 50$	
10/560 μs (TIA-968-A, 10/560 μs voltage wave shape)		$2 \times \pm 45$	
10/1000 μs (GR-1089-CORE, 10/1000 μs voltage wave shape)		$2 \times \pm 35$	
Non-repetitive peak on-state current, $0^\circ\text{C} < T_A < 70^\circ\text{C}$	I_{TSM}	2×4.3	A
1 s, 50 Hz			
Initial rate of rise of on-state current, linear current ramp, maximum ramp value < 38 A	di/dt	250	A/ μs
Junction temperature	T_J	-65 to +150	$^\circ\text{C}$
Storage temperature range	T_{stg}	-65 to +150	$^\circ\text{C}$

NOTE: 1. Initially the device must be in thermal equilibrium with $0^\circ\text{C} < T_J < 70^\circ\text{C}$. The surge may be repeated after the device returns to its initial conditions.

Electrical Characteristics for Terminals T and R, $T_A = 25^\circ\text{C}$ (Unless Otherwise Noted)

Parameter	Test Conditions	Min	Typ	Max	Unit
I_{DRM} Repetitive peak off-state current	$V_D = \pm V_{\text{DRM}}$	$T_A = 25^\circ\text{C}$		± 5	μA
$V_{(\text{BO})}$ Breakover voltage	$dv/dt = -250 \text{ V/ms}$, $R_{\text{SOURCE}} = 300 \Omega$			± 123	V
I_H Holding current	$I_T = \pm 5 \text{ A}$, $di/dt = \pm 30 \text{ mA/ms}$		± 150		mA

Electrical Characteristics for Terminals T and G or R and G, $T_A = 25^\circ\text{C}$ (Unless Otherwise Noted)

Parameter	Test Conditions	Min	Typ	Max	Unit
I_{DRM} Repetitive peak off-state current	$V_D = V_{\text{DRM}}$	$T_A = 25^\circ\text{C}$		-5	μA
$V_{(\text{BO})}$ Breakover voltage	$dv/dt = -250 \text{ V/ms}$, $R_{\text{SOURCE}} = 300 \Omega$			-120	V
$V_{(\text{BO})}$ Impulse breakover voltage	$dv/dt \leq -1000 \text{ V}/\mu\text{s}$, Linear voltage ramp, Maximum ramp value = -500 V $di/dt \leq -20 \text{ A}/\mu\text{s}$, Linear current ramp, Maximum ramp value = -10 A			-130	V
$I_{(\text{BO})}$ Breakover current	$dv/dt = -250 \text{ V/ms}$, $R_{\text{SOURCE}} = 300 \Omega$	-100		-600	mA
I_H Holding current	$I_T = -5 \text{ A}$, $di/dt = +30 \text{ mA/ms}$	-150			mA
V_T On-state voltage	$I_T = -5 \text{ A}$, $t_w = 100 \mu\text{s}$			-3	V
V_F Forward voltage	$I_F = +5 \text{ A}$, $t_w = 100 \mu\text{s}$			+3	V
V_{FRM} Peak forward recovery voltage	$dv/dt \leq +1000 \text{ V}/\mu\text{s}$, Linear voltage ramp, Maximum ramp value = +500 V $di/dt \leq +20 \text{ A}/\mu\text{s}$, Linear current ramp, Maximum ramp value = +10 A		+3.3		V
dv/dt Critical rate of rise of off-state voltage	Linear voltage ramp, maximum ramp value < $0.85V_{\text{DRM}}$	-5			$\text{kV}/\mu\text{s}$
C_O Off-state capacitance	$f = 1 \text{ MHz}$, $V_d = 1 \text{ V rms}$	$V_D = -2 \text{ V}$	60	65	pF
		$V_D = -50 \text{ V}$	20	25	

TISP1120F3D Overvoltage Protector

BOURNS®

Thermal Characteristics, $T_A = 25^\circ\text{C}$ (Unless Otherwise Noted)

Parameter	Test Conditions	Min	Typ	Max	Unit
$R_{\theta JA}$ Junction to ambient thermal resistance	$P_{\text{tot}} = 0.8 \text{ W}$ 5 cm ² FR4 PCB			160	°C/W

Parameter Measurement Information

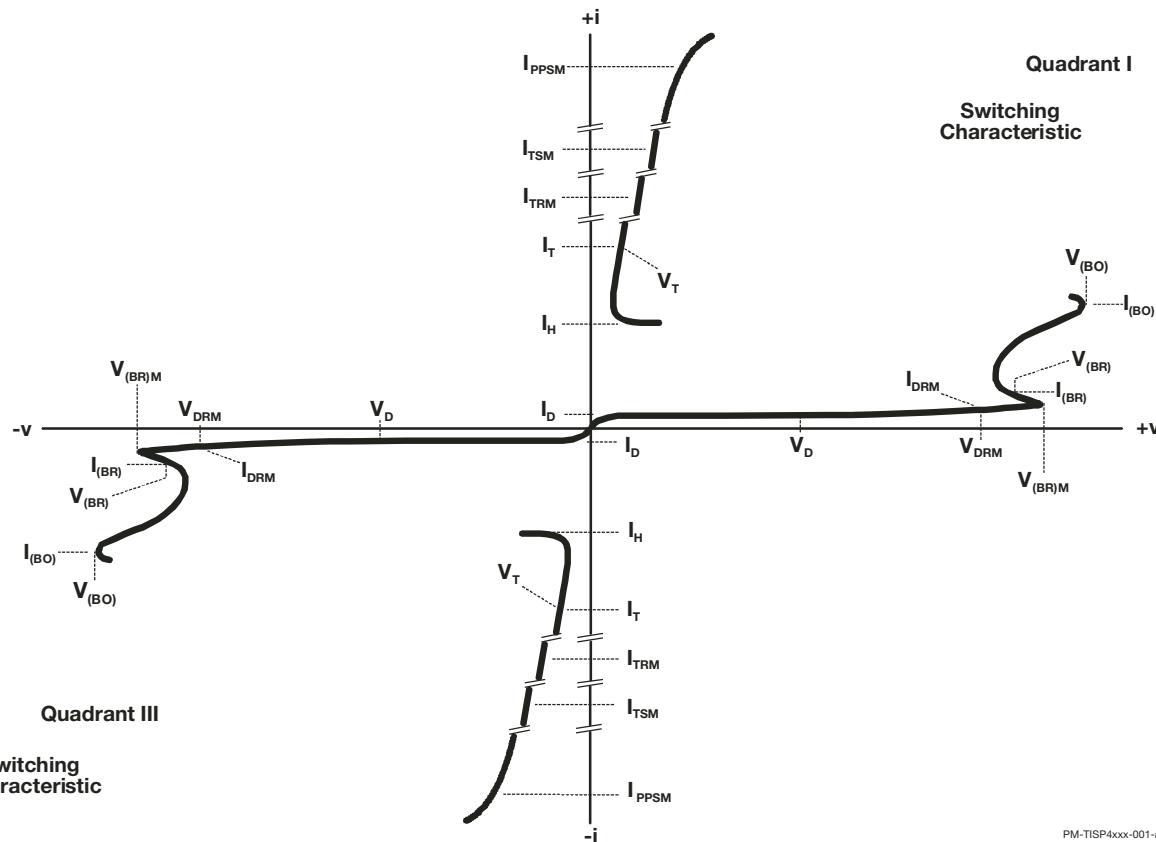


Figure 1. Voltage-Current Characteristic for the Terminals T and R
All Measurements are Referenced to Terminal R

TISP1120F3D Overvoltage Protector

BOURNS®

Parameter Measurement Information (Continued)

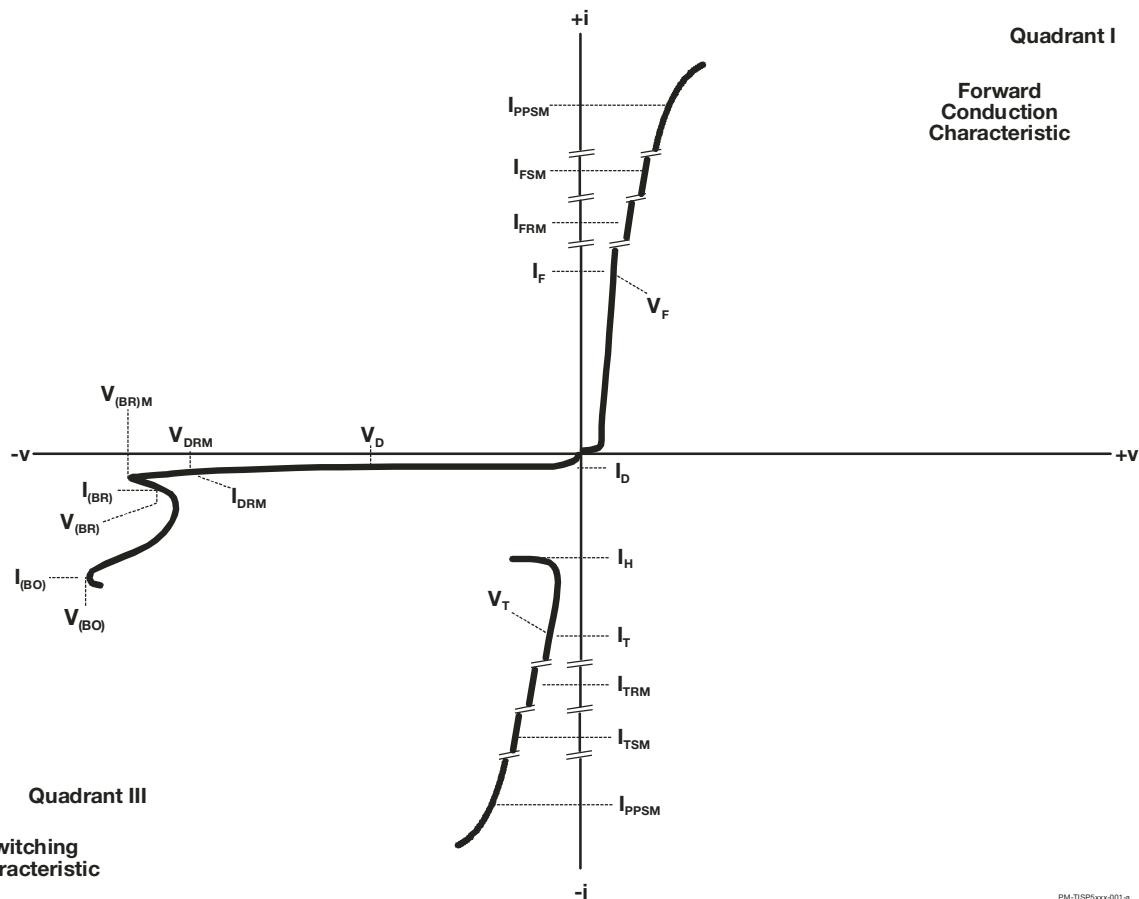


Figure 2. Voltage-Current Characteristic for Terminals T and G or R and G
All Measurements are Referenced to Terminal G

Bourns Sales Offices

Region	Phone	Fax
The Americas:	+1-951-781-5500	+1-951-781-5700
Europe:	+41-41-7685555	+41-41-7685510
Asia-Pacific:	+886-2-25624117	+886-2-25624116

Technical Assistance

Region	Phone	Fax
The Americas:	+1-951-781-5500	+1-951-781-5700
Europe:	+41-41-7685555	+41-41-7685510
Asia-Pacific:	+886-2-25624117	+886-2-25624116

www.bourns.com

Bourns® products are available through an extensive network of manufacturer's representatives, agents and distributors. To obtain technical applications assistance, a quotation, or to place an order, contact a Bourns representative in your area.

*Reliable Electronic Solutions*