

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Triad Magnetics](#)  
[F3-20](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



**Power Transformer  
Chassis Mount: Quick Pack**

**F3-20**

**Description:**

The F3-20 Quick Pack small power transformer offers a significant reduction in size and weight over a standard transformer. This transformer can be used for a wide variety of applications. It is bobbin wound for reduced size and small operating space.

**Electrical Specifications (@25C);**

**Maximum Power:** 2.4VA

**Input Voltage:** 115VAC@50/60Hz

**Output Voltage:** 20VCT@0.12A

**Hipot:** 2500VAC primary to secondary; 1500VAC windings to core.

**Construction:**

Split bobbin non concentric winding eliminates costly electrostatic shielding. Termination is suitable for quick connects or soldering. Built with UL Class B Insulation System.

**Safety:**

UL: File E53148, UL 5085-1 and 2 (formerly UL 506), General Purpose.




**Dimensions:**

| A     | B        | C     | D     | E     | F        | G    |
|-------|----------|-------|-------|-------|----------|------|
| 1.187 | 1.75±.03 | 2.062 | 1.187 | 1.625 | .187 Dia | .562 |

- Notes:** 1. Units: inches.  
2. Terminal size: .187" X 0.021".  
3. Weight: .25 lbs




**Schematic:**



**Input:** 1 to 3  
**Output:** 4 to 6

**RoHS Compliance:** As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

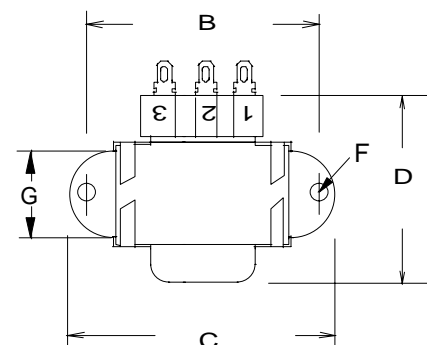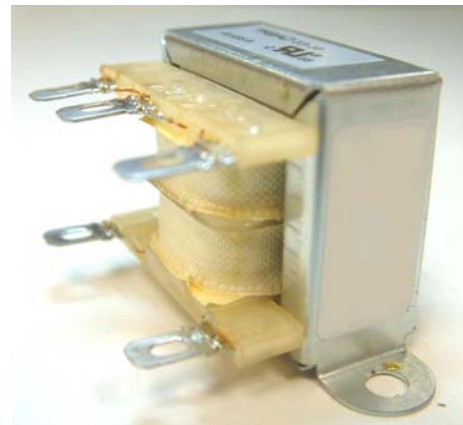

Web: www.TriadMagnetics.com  
Phone 951-277-0757  
Fax 951-277-2757

460 Harley Knox Blvd.  
Perris, California 92571

Publish Date: December 4, 2013