

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Honeywell Sensing and Productivity Solutions
V3L-3296](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



MICRO SWITCH
 a Honeywell Division

FED. MFG. CODE 91929



SWITCH - BASIC

CATALOG LISTING

V3L-3296


CQ-X2787

CATALOG LISTING
V3L-3296
 REPLACES
 RELEASE NO. PR-16061
 CHECK
 ISSUE
M
3
 REVISIONS
 A PR-16061
 MAM
 10 DEC 87
 B CO-76298
 JAK
 11 NOV 93
 CHECK
 12 DEC 87
 GLH
 CHECK
 10 DEC 87
 DDM/CAD
 DRAWN

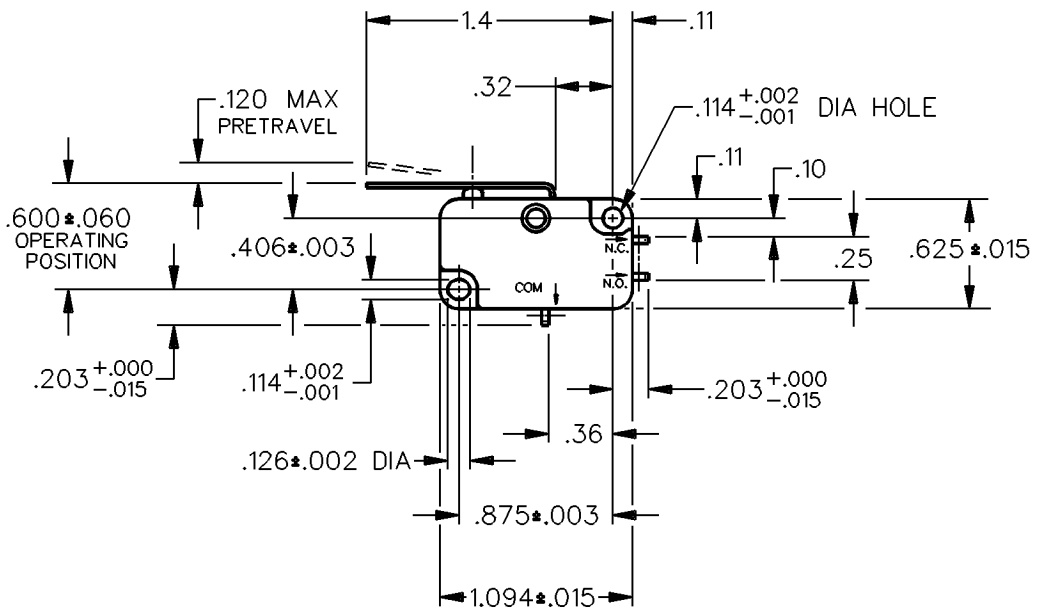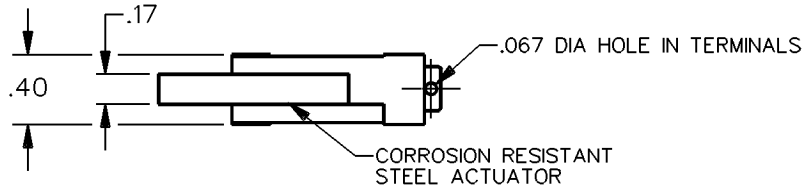

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 88 GRAM MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — 6 GRAM MIN	L83	ONE PLACE (.0)	± .030
DIFFERENTIAL TRAVEL — — — .032 MAX	15.1A 1/2HP 125, 250 VAC	TWO PLACE (.00)	± .015
OVERTRAVEL — — — .090 MIN	1/2A 125 VDC, 1/4A 250 VDC	THREE PLACE (.000)	± .005
RELEASE TRAVEL — — — .017 MIN	5A 125 VAC "L"	ANGLES	±
		WEIGHT	