

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)  
[SQ48T10050-NBB0](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

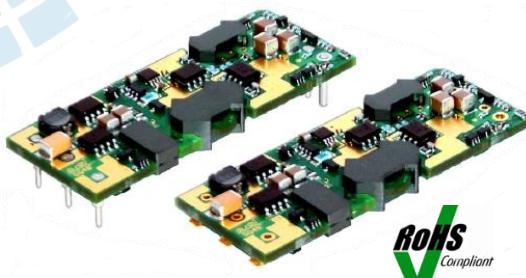

## Features

- RoHS lead-free solder and lead-solder-exempted products are available
- Delivers up to 15A (50W)
- Industry-standard quarter-brick pinout
- Outputs available in 12.0, 8.0, 6.0, 5.0, 3.3, 2.5, 2.0, 1.8, 1.5, 1.2, and 1.0 V
- Available in through-hole and SMT packages
- Low profile: 0.258" (6.55 mm)
- Low weight: 0.53 oz (15 g)
- On-board input differential LC-filter
- Startup into pre-biased output
- No minimum load required
- Meets Basic Insulation requirements
- Withstands 100 V input transient for 100 ms
- Fixed-frequency operation
- Fully protected
- Remote output sense
- Positive or negative logic ON/OFF option
- Output voltage trim range: +10%/-20% with industry-standard trim equations (except 1.2 V and 1.0 V outputs with trim range  $\pm 10\%$ )
- Output voltage trim range: +10%/-20% with industry-standard trim equations (except 1.2 V and 1.0 V outputs with trim range  $\pm 10\%$ )
- Safety according to IEC/EN 60950-1 2<sup>nd</sup> Edition and UL/CSA 60950-1 2<sup>nd</sup> Edition
- Designed to meet Class B conducted emissions per FCC and EN55022 when used with external filter
- All materials meet UL94, V-0 flammability rating

## SQ48 DC-DC Series

36-75 VDC Input; 1.0-12 VDC Output

The SemiQ™ Series of dc-dc converters provides a high-efficiency single output in a size that is only 60% of industry-standard quarter-bricks, while preserving the same pinout and functionality.

In high temperature environments, for output voltages ranging from 3.3 V to 1.0 V, the thermal performance of SemiQ™ converters exceeds that of most competitors' 20-25 A quarter-bricks. This performance is accomplished through the use of patent-pending circuit, packaging, and processing techniques to achieve ultra-high efficiency, excellent thermal management, and a very low body profile.

Low body profile and the preclusion of heat sinks minimize airflow shadowing, thus enhancing cooling for downstream devices. The use of 100% automation for assembly, coupled with advanced electronic circuits and thermal design, results in a product with extremely high reliability.

Operating from a 36-75 V input, the SQ48 Series converters provide any standard output voltage from 12 V down to 1.0 V. Outputs can be trimmed from -20% to +10% of the nominal output voltage ( $\pm 10\%$  for output voltages 1.2 V and 1.0 V), thus providing outstanding design flexibility.

With a standard pinout and trim equations, the SQ48 Series converters are perfect drop-in replacements for existing quarter-brick designs. Inclusion of this converter in new designs can result in significant board space and cost savings. In both cases the designer can expect reliability improvement over other available converters because of the SQ48 Series' optimized thermal efficiency.

## Applications

- Telecommunications
- Data Communications
- Wireless Communications
- Servers

## Benefits

- High efficiency – no heat sink required
- For output voltages ranging from 3.3 to 1.0 V, 40% higher current capability at elevated temperatures than most competitors' 20-25A quarter-bricks
- Extremely small footprint: 0.896" x 2.30" (2.06 in<sup>2</sup>), 40% smaller than conventional quarter-bricks

North America  
+1-866.513.2839

Asia-Pacific  
+86.755.29885888

Europe, Middle East  
+353 61 225 977

tech.support@psbel.com  
belpowersolutions.com

# SQ48 DC-DC Series

## Electrical Specifications

Conditions:  $T_A = 25^\circ\text{C}$ , Airflow = 300 LFM (1.5 m/s),  $V_{IN} = 48\text{ VDC}$ ,  $C_{IN}=33\text{ }\mu\text{F}$ , unless otherwise specified.

PARAMETER	Notes	MIN	TYP	MAX	UNITS
<b>Absolute Maximum Ratings</b>					
Input Voltage	Continuous	0	80	80	VDC
Operating Ambient Temperature		-40	85	85	°C
Storage Temperature		-55	125	125	°C
<b>Input Characteristics</b>					
Operating Input Voltage Range		36	48	75	VDC
Input Undervoltage Lockout	Non-latching				
Turn-on Threshold		33	34	35	VDC
Turn-off Threshold		31	32	33	VDC
Input Voltage Transient	100 ms			100	VDC
<b>Isolation Characteristics</b>					
I/O Isolation		2000			VDC
Isolation Capacitance	1.0 - 3.3 V	160			pF
	5.0 - 6.0 V	260			pF
	8.0 - 12 V	230			pF
Isolation Resistance		10			MΩ
<b>Feature Characteristics</b>					
Switching Frequency		415			kHz
Output Voltage Trim Range <sup>1</sup>	Industry-std. equations (1.5 - 12V) Use trim equation on Page 4 (1.0 -1.2 V)	-20	+10	+10	%
Remote Sense Compensation <sup>1</sup>	Percent of $V_{OUT}(\text{NOM})$	-10	+10	+10	%
Output Overvoltage Protection	Non-latching ( 1.5 – 12 V) Non-latching (1.0 -1.2 V)	117	122	127	%
Auto-Restart Period	Applies to all protection features	124	132	140	%
Turn-On Time	See Figures F, G and H	100	4	4	ms
ON/OFF Control (Positive Logic)					
Converter Off (logic low)		-20	0.8	0.8	VDC
Converter On (logic high)		2.4	20	20	VDC
ON/OFF Control (Negative Logic)					
Converter Off (logic high)		2.4	20	20	VDC
Converter On (logic low)		-20	0.8	0.8	VDC

### Additional Notes:

<sup>1</sup> $V_{OUT}$  can be increased up to 10% via the sense leads or up to 10% via the trim function. However, the total output voltage trim from all sources should not exceed 10% of  $V_{OUT}(\text{NOM})$ , in order to ensure specified operation of overvoltage protection circuitry.

## Operations

### Input and Output Impedance

These power converters have been designed to be stable with no external capacitors when used in low inductance input and output circuits.

In many applications, the inductance associated with the distribution from the power source to the input of the converter can affect the stability of the converter. The addition of a 33  $\mu\text{F}$  electrolytic capacitor with an  $ESR < 1\text{ }\Omega$  across the input

866.513.2839

tech.support@psbel.com

belpowersolutions.com

## SQ48 DC-DC Series


helps to ensure stability of the converter. In many applications, the user has to use decoupling capacitance at the load. The power converter will exhibit stable operation with external load capacitance up to 1000  $\mu$ F on 12 V, 2,200  $\mu$ F on 8.0 V, 10,000  $\mu$ F on 5.0 – 6.0 V, and 15,000  $\mu$ F on 3.3 – 1.0 V outputs.

Additionally, see the EMC section of this data sheet for discussion of other external components which may be required for control of conducted emissions.

### ON / OFF (Pin 2)

The ON/OFF pin is used to turn the power converter on or off remotely via a system signal. There are two remote control options available, positive logic and negative logic, with both referenced to Vin(-). A typical connection is shown in Fig. A.

Fig. A: Circuit configuration for ON/OFF function

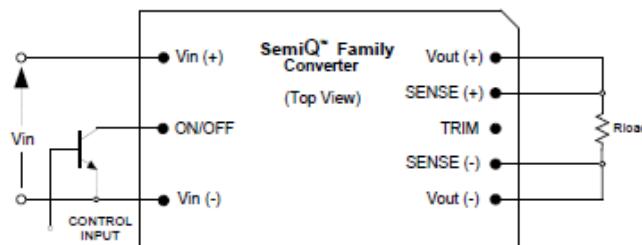

The positive logic version turns on when the ON/OFF pin is at a logic high and turns off when at a logic low. The converter is on when the ON/OFF pin is left open. See Electrical Specifications for logic high/low definitions.


The negative logic version turns on when the pin is at a logic low and turns off when the pin is at a logic high. The ON/OFF pin can be hardwired directly to Vin(-) to enable automatic power up of the converter without the need of an external control signal.

The ON/OFF pin is internally pulled up to 5V through a resistor. A properly debounced mechanical switch, open collector transistor, or FET can be used to drive the input of the ON/OFF pin. The device must be capable of sinking up to 0.2 mA at a low level voltage of  $\leq 0.8$  V. An external voltage source ( $\pm 20$  V maximum) may be connected directly to the ON/OFF input, in which case it must be capable of sourcing or sinking up to 1 mA depending on the signal polarity. See the Startup Information section for system timing waveforms associated with use of the ON/OFF pin.

### Remote Sense (Pins 5 and 7)

The remote sense feature of the converter compensates for voltage drops occurring between the output pins of the converter and the load. The SENSE(-) (Pin 5) and SENSE(+) (Pin 7) pins should be connected at the load or at the point where regulation is required (see Fig. B).

Fig. B: Remote sense circuit configuration

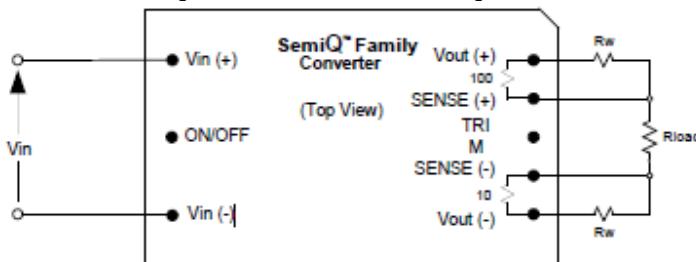

### CAUTION

If remote sensing is not utilized, the SENSE(-) pin must be connected to the Vout(-) pin (Pin 4), and the SENSE(+) pin must be connected to the Vout(+) pin (Pin 8) to ensure the converter will regulate at the specified output voltage. If these connections are not made, the converter will deliver an output voltage that is slightly higher than the specified data sheet value.

Because the sense leads carry minimal current, large traces on the end-user board are not required. However, sense traces should be run side by side and located close to a ground plane to minimize system noise and ensure optimum performance.

When using the remote sense function, the converter's output overvoltage protection (OVP) senses the voltage across

866.513.2839

tech.support@psbel.com

belpowersolutions.com

## SQ48 DC-DC Series

Vout(+) and Vout(-), and not across the sense lines, so the resistance (and resulting voltage drop) between the output pins of the converter and the load should be minimized to prevent unwanted triggering of the OVP.

When utilizing the remote sense feature, care must be taken not to exceed the maximum allowable output power capability of the converter, which is equal to the product of the nominal output voltage and the allowable output current for the given conditions.

When using remote sense, the output voltage at the converter can be increased by as much as 10% above the nominal rating in order to maintain the required voltage across the load. Therefore, the designer must, if necessary, decrease the maximum current (originally obtained from the derating curves) by the same percentage to ensure the converter's actual output power remains at or below the maximum allowable output power.

### Output Voltage Adjust / TRIM (Pin 6)

The output voltage can be adjusted up 10% or down 20% for  $V_{out} \geq 1.5$  V, and 10% for  $V_{out} = 1.2$  V relative to the rated output voltage by the addition of an externally connected resistor. For output voltage 3.3 V, trim up to 10% is guaranteed only at  $V_{in} \geq 40$  V, and it is marginal (8% to 10%) at  $V_{in} = 36$  V.

The TRIM pin should be left open if trimming is not being used. To minimize noise pickup, a 0.1  $\mu$ F capacitor is connected internally between the TRIM and SENSE(-) pins.

To increase the output voltage, refer to Fig. C. A trim resistor,  $R_{T-INCR}$ , should be connected between the TRIM (Pin 6) and SENSE(+) (Pin 7), with a value of:

$$R_{T-INCR} = \frac{5.11(100 + \Delta)V_{O-NOM} - 626}{1.225\Delta} - 10.22 \quad [\text{k}\Omega],$$

for 1.5 – 12 V.

$$R_{T-INCR} = \frac{84.6}{\Delta} - 7.2 \quad [\text{k}\Omega] (1.2 \text{ V})$$

$$R_{T-INCR} = \frac{120}{\Delta} - 9 \quad [\text{k}\Omega] (1.0 \text{ V})$$

where,


$R_{T-INCR}$  = Required value of trim-up resistor  $\text{k}\Omega$

$V_{O-NOM}$  = Nominal value of output voltage [V]

$$\Delta = \left| \frac{(V_{O-REQ} - V_{O-NOM})}{V_{O-NOM}} \right| \times 100 \quad [\%]$$

$V_{O-REQ}$  = Desired (trimmed) output voltage [V].

Fig. C: Configuration for increasing output voltage

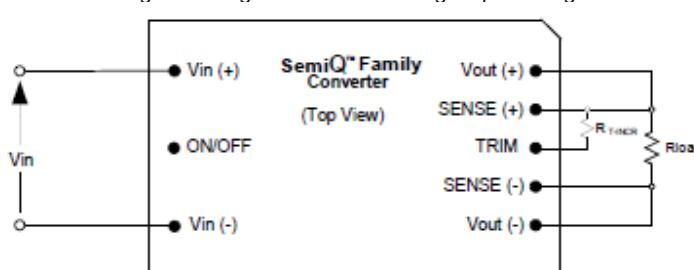

When trimming up, care must be taken not to exceed the converter's maximum allowable output power. See the previous section for a complete discussion of this requirement.

To decrease the output voltage (Fig. D), a trim resistor,  $R_{T-DECR}$ , should be connected between the TRIM (Pin 6) and SENSE(-) (Pin 5), with a value of:

$$R_{T-DECR} = \frac{511}{\Delta} - 10.22 \quad [\text{k}\Omega] (1.5 - 12 \text{ V})$$

866.513.2839

tech.support@psbel.com

belpowersolutions.com

## SQ48 DC-DC Series

$$R_{T-DECR} = \frac{700}{\Delta} - 15 \quad [k\Omega] (1.2 V)$$

$$R_{T-DECR} = \frac{700}{|\Delta|} - 17 \quad [k\Omega] (1.0 V)$$

where,


**R<sub>T-DECR</sub>** = Required value of trim-down resistor [kΩ] and **Δ** is defined above.

**Note:**

The above equations for calculation of trim resistor values match those typically used in conventional industry-standard quarter-bricks and one-eighth bricks (except for 1.2 V and 1.0 V outputs).

Converters with output voltages 1.2 V and 1.0 V are available with alternative trim feature to provide the customers with the flexibility of second sourcing. These converters have a “T” character in the part number. The trim equations of “T” version of converters and more information can be found in Application Note 103.

Fig. D: Configuration for decreasing output voltage

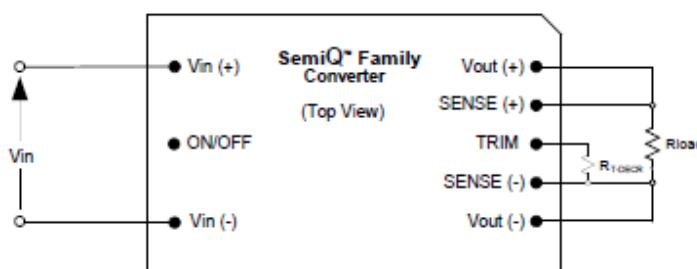

Trimming/sensing beyond 110% of the rated output voltage is not an acceptable design practice, as this condition could cause unwanted triggering of the output overvoltage protection (OVP) circuit. The designer should ensure that the difference between the voltages across the converter's output pins and its sense pins does not exceed 10% of V<sub>OUT(NOM)</sub>, or:

$$[V_{out(+)} - V_{out(-)}] - [V_{SENSE(+)} - V_{SENSE(-)}] \leq V_{o-NOM} \times 10\% \quad [V]$$

This equation is applicable for any condition of output sensing and/or output trim.

### Protection Features

#### Input Undervoltage Lockout

Input undervoltage lockout is standard with this converter. The converter will shut down when the input voltage drops below a pre-determined voltage.

The input voltage must be typically 34 V for the converter to turn on. Once the converter has been turned on, it will shut off when the input voltage drops typically below 32 V. This feature is beneficial in preventing deep discharging of batteries used in telecom applications.

#### Output Overcurrent Protection (OCP)

The converter is protected against overcurrent or short circuit conditions. Upon sensing an overcurrent condition, the converter will switch to constant current operation and thereby begin to reduce output voltage. When the output voltage drops below 50% of the nominal value of output voltage, the converter will shut down (Fig. x.17).

Once the converter has shut down, it will attempt to restart nominally every 100 ms with a typical 1-2% duty cycle (Fig. x.18). The attempted restart will continue indefinitely until the overload or short circuit condition is removed or the output voltage rises above 50% of its nominal value.

Once the output current is brought back into its specified range, the converter automatically exits the hiccup mode and continues normal operation.

866.513.2839

tech.support@psbel.com

belpowersolutions.com

# SQ48 DC-DC Series

## Output Overvoltage Protection (OVP)

The converter will shut down if the output voltage across Vout(+) (Pin 8) and Vout(-) (Pin 4) exceeds the threshold of the OVP circuitry. The OVP circuitry contains its own reference, independent of the output voltage regulation loop. Once the converter has shut down, it will attempt to restart every 100 ms until the OVP condition is removed.

## Overtemperature Protection (OTP)

The converter will shut down under an overtemperature condition to protect itself from overheating caused by operation outside the thermal derating curves, or operation in abnormal conditions such as system fan failure. After the converter has cooled to a safe operating temperature, it will automatically restart.

## Safety Requirements

The converters meet North American and International safety regulatory requirements. Basic Insulation is provided between input and output.

To comply with safety agencies' requirements, an input line fuse must be used external to the converter. The Table below provides the recommended fuse rating for use with this family of products.

Output Voltage	Fuse Rating
3.3 V	4 A
12 – 5.0 V, 2.5 V	3 A
2.0 – 1.2 V	2 A

All SQ converters are UL approved for a maximum fuse rating of 15 Amps. To protect a group of converters with a single fuse, the rating can be increased from the recommended values above.

## Electromagnetic Compatibility (EMC)

EMC requirements must be met at the end-product system level, as no specific standards dedicated to EMC characteristics of board mounted component dc-dc converters exist. However, Bel Power Solutions tests its converters to several system level standards, primary of which is the more stringent EN55022, *Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement*.

An effective internal LC differential filter significantly reduces input reflected ripple current, and improves EMC.

With the addition of a simple external filter (see Application Note 100), all versions of the SQ48 Series converters pass the requirements of Class B conducted emissions per EN55022 and FCC requirements. Please contact Bel Power Solutions Applications Engineering for details of this testing.

## Characterization

### General Information

The converter has been characterized for many operational aspects, to include thermal derating (maximum load current as a function of ambient temperature and airflow) for vertical and horizontal mounting, efficiency, startup and shutdown parameters, output ripple and noise, transient response to load step-change, overload, and short circuit.

The figures are numbered as Fig. x.y, where x indicates the different output voltages, and y associates with specific plots (y = 1 for the vertical thermal derating, ...). For example, Fig. x.1 will refer to the vertical thermal derating for all the output voltages in general.

The following pages contain specific plots or waveforms associated with the converter. Additional comments for specific data are provided below.

### Test Conditions

All data presented were taken with the converter soldered to a test board, specifically a 0.060" thick printed wiring board (PWB) with four layers. The top and bottom layers were not metalized. The two inner layers, comprised of two-ounce copper, were used to provide traces for connectivity to the converter.

The lack of metalization on the outer layers as well as the limited thermal connection ensured that heat transfer from the converter to the PWB was minimized. This provides a worst-case but consistent scenario for thermal derating purposes.

All measurements requiring airflow were made in the vertical and horizontal wind tunnel using Infrared (IR) thermography and thermocouples for thermometry.

866.513.2839


tech.support@psbel.com

[belpowersolutions.com](http://belpowersolutions.com)

## SQ48 DC-DC Series

Ensuring components on the converter do not exceed their ratings is important to maintaining high reliability. If one anticipates operating the converter at or close to the maximum loads specified in the derating curves, it is prudent to check actual operating temperatures in the application. Thermographic imaging is preferable; if this capability is not available, then thermocouples may be used. The use of AWG #40 gauge thermocouples is recommended to ensure measurement accuracy. Careful routing of the thermocouple leads will further minimize measurement error. Refer to Fig. E for the optimum measuring thermocouple location.

Fig. E: Location of the thermocouple for thermal testing

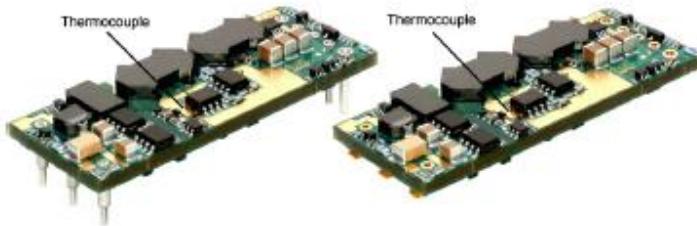

### Thermal Derating

Load current vs. ambient temperature and airflow rates are given in Fig. x.1 to Fig. x.4 for through-hole and surface-mount versions. Ambient temperature was varied between 25°C and 85°C, with airflow rates from 30 to 500LFM (0.15 to 2.5m/s), and vertical and horizontal converter mounting.

For each set of conditions, the maximum load current was defined as the lowest of:

- (i) The output current at which any FET junction temperature does not exceed a maximum specified temperature (120°C) as indicated by the thermographic image, or
- (ii) The nominal rating of the converter (4A on 12V, 5.3A on 8.0V, 8A on 6.0V, 10A on 5.0V, and 15A on 3.3 – 1.0V).

During normal operation, derating curves with maximum FET temperature less or equal to 120 °C should not be exceeded. Temperature on the PCB at thermocouple location shown in Fig. E should not exceed 118 °C in order to operate inside the derating curves.

### Efficiency

Fig. x.5 shows the efficiency vs. load current plot for ambient temperature of 25°C, airflow rate of 300 LFM (1.5 m/s) with vertical mounting and input voltages of 36V, 48V and 72V. Also, a plot of efficiency vs. load current, as a function of ambient temperature with Vin = 48V, airflow rate of 200 LFM (1 m/s) with vertical mounting is shown in Fig. x.6.

### Power Dissipation

Fig. x.7 shows the power dissipation vs. load current plot for Ta = 25°C, airflow rate of 300LFM (1.5 m/s) with vertical mounting and input voltages of 36V, 48V and 72V. Also, a plot of power dissipation vs. load current, as a function of ambient temperature with Vin = 48V, airflow rate of 200LFM (1 m/s) with vertical mounting is shown in Fig. x.8.

### Startup

Output voltage waveforms, during the turn-on transient using the ON/OFF pin for full rated load currents (resistive load) are shown without and with external load capacitance in Fig. x.9 and Fig. x.10, respectively.

### Ripple and Noise

Fig. x.13 shows the output voltage ripple waveform, measured at full rated load current with a 10  $\mu$ F tantalum and 1  $\mu$ F ceramic capacitor across the output. Note that all output voltage waveforms are measured across a 1  $\mu$ F ceramic capacitor.

The input reflected ripple current waveforms are obtained using the test setup shown in Fig x.14. The corresponding waveforms are shown in Fig. x.15 and Fig. x.16.

866.513.2839

tech.support@psbel.com

belpowersolutions.com

## SQ48 DC-DC Series


### Scenario #1: Initial Startup From Bulk Supply

ON/OFF function enabled, converter started via application of  $V_{IN}$ . See Figure F.

Time	Comments
$t_0$	ON/OFF pin is ON; system front-end power is toggled on, $V_{IN}$ to converter begins to rise.
$t_1$	$V_{IN}$ crosses undervoltage Lockout protection circuit threshold; converter enabled.
$t_2$	Converter begins to respond to turn-on command (converter turn-on delay).
$t_3$	Converter $V_{OUT}$ reaches 100% of nominal value.

For this example, the total converter startup time ( $t_3 - t_1$ ) is typically 4 ms.

Fig. F: Startup scenario #1

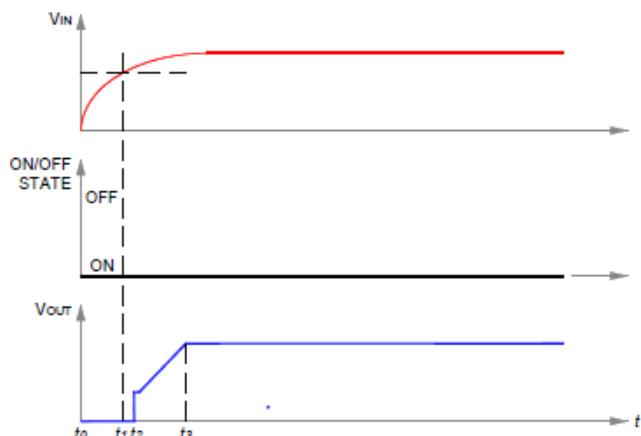


### Scenario #2: Initial Startup Using ON/OFF Pin

With  $V_{IN}$  previously powered, converter started via ON/OFF pin. See Figure G.

Time	Comments
$t_0$	$V_{IN}$ at nominal value.
$t_1$	Arbitrary time when ON/OFF pin is enabled (converter enabled).
$t_2$	End of converter turn-on delay.
$t_3$	Converter $V_{OUT}$ reaches 100% of nominal value.

For this example, the total converter startup time ( $t_3 - t_1$ ) is typically 4 ms.

Fig. G: Startup scenario #2.

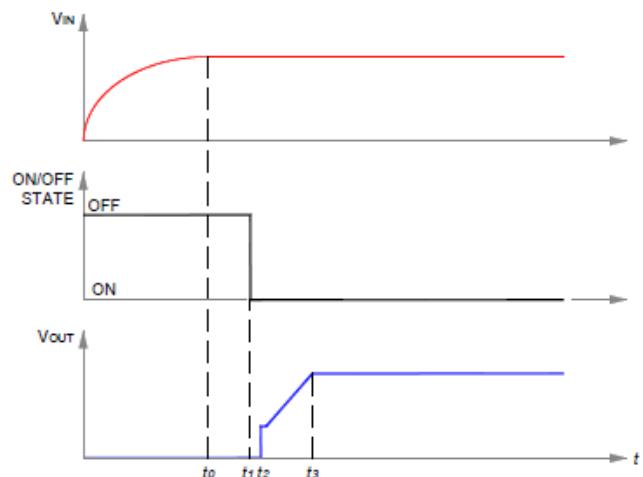


### Scenario #3: Turn-off and Restart Using ON/OFF Pin

With  $V_{IN}$  previously powered, converter is disabled and then enabled via ON/OFF pin. See Figure H.

Time	Comments
$t_0$	$V_{IN}$ and $V_{OUT}$ are at nominal values; ON/OFF pin ON.
$t_1$	ON/OFF pin arbitrarily disabled; converter output falls to zero; turn-on inhibit delay period (100 ms typical) is initiated, and ON/OFF pin action is internally inhibited.
$t_2$	ON/OFF pin is externally re-enabled.
	If $(t_2 - t_1) \leq 100 \text{ ms}$ , external action of ON/OFF pin is locked out by startup inhibit timer.
	If $(t_2 - t_1) > 100 \text{ ms}$ , ON/OFF pin action is internally enabled.
$t_3$	Turn-on inhibit delay period ends. If ON/OFF pin is ON, converter begins turn-on; if off, converter awaits ON/OFF pin ON signal; see Figure G.
$t_4$	End of converter turn-on delay.
$t_5$	Converter $V_{OUT}$ reaches 100% of nominal value.

For the condition,  $(t_2 - t_1) \leq 100 \text{ ms}$ , the total converter startup time ( $t_5 - t_2$ ) is typically 104 ms. For  $(t_2 - t_1) > 100 \text{ ms}$ , startup will be typically 4 ms after release of ON/OFF pin.

Fig. H: Startup scenario #3.

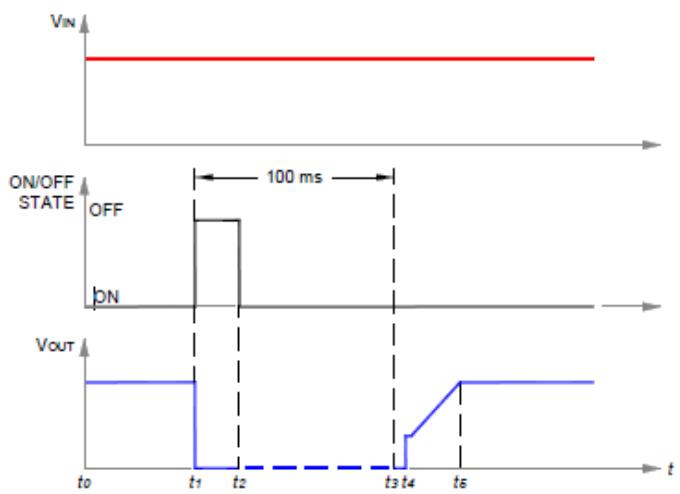

866.513.2839

tech.support@psbel.com

belpowersolutions.com

# SQ48 DC-DC Series


## Electrical Specifications: SQ48T/S04120 (12 Volt Out)

Conditions:  $T_A = 25^\circ\text{C}$ , Airflow = 300 LFM (1.5 m/s),  $V_{in} = 48\text{ VDC}$ ,  $V_{out} = 12\text{ VDC}$ , unless otherwise specified.


Parameter	Notes	Min	Typ	Max	Units
<b>Input Characteristics</b>					
Maximum Input Current	4 ADC, 12 VDC Out @ 36 VDC In			1.53	ADC
Input Stand-by Current	$V_{in} = 48\text{V}$ , converter disabled	3			mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{V}$ , converter enabled		45		mADC
Input Reflected-Ripple Current	25MHz bandwidth		6		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120HZ		TBD		dB
<b>Output Characteristics</b>					
Output Voltage Set Point (no load)		11.880	12.000	12.120	VDC
Output Regulation					
Over Line			$\pm 4$	$\pm 5$	mV
Over Load			$\pm 4$	$\pm 5$	mV
Output Voltage Range	Over line, load and temperature <sup>1</sup>	11.820		12.180	VDC
Output Ripple and Noise - 25 MHz bandwidth	Full load + 10 $\mu\text{F}$ tantalum + 1 Mf ceramic	80	120		$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			1,000	$\mu\text{F}$
Output Current Range		0		4	ADC
Current Limit Inception	Non-latching	4.5	5	5.5	ADC
Peak Short-Circuit Current	Non-latching, Short =10 m $\Omega$ .		7.5	10	A
RMS Short-Circuit Current	Non-latching			4	Arms
<b>Dynamic Response</b>					
Load Change 25% of $I_{out}$ Max, $di/dt = 0.1\text{ A}/\mu\text{s}$	$C_o = 1\text{ }\mu\text{F}$ ceramic	200			mV
$di/dt = 5\text{ A}/\mu\text{s}$	$C_o = 47\text{ }\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic	200			mV
Settling Time to 1%		400			$\mu\text{s}$
<b>Efficiency</b>					
100% Load		87.0			%
50% Load		87.0			%

<sup>1</sup>-40  $^\circ\text{C}$  to 85  $^\circ\text{C}$ .

**Fig. 12V.1:** Available load current vs. ambient air temperature and airflow rates for SQ48T04120 converter with D height pins mounted vertically with  $V_{in} = 48\text{V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

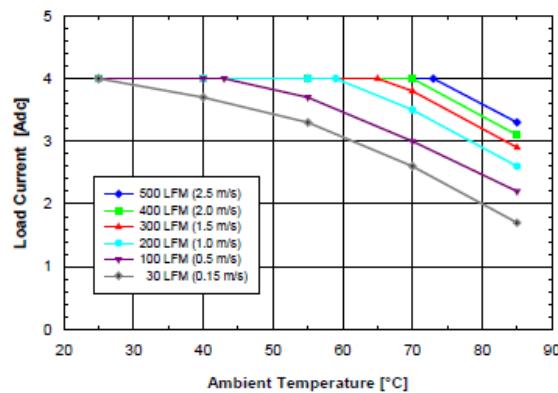

**Fig. 12V.2:** Available load current vs. ambient air temperature and airflow rates for SQ48T04120 converter with D height pins mounted horizontally with  $V_{in} = 48\text{V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

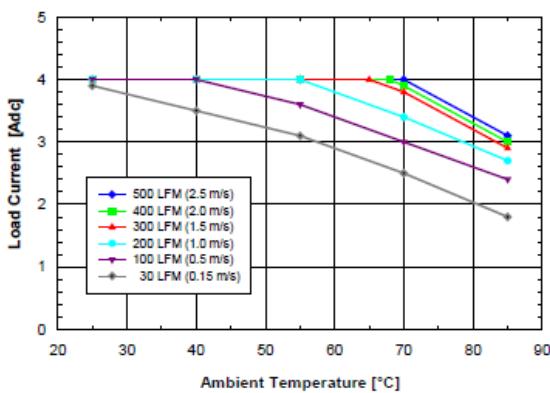

866.513.2839


tech.support@psbel.com

belpowersolutions.com


## SQ48 DC-DC Series

### SQ48T/S04120 (12 Volt Out)


**Fig. 12V.3:** Available load current vs. ambient air temperature and airflow rates for SQ48S04120 converter mounted vertically with  $V_{in} = 48V$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}C$ .

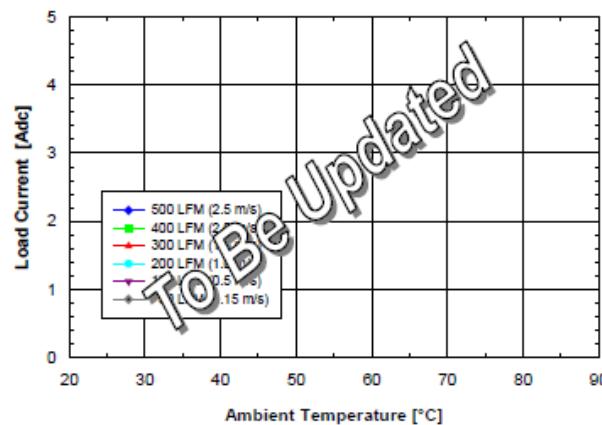


**Fig. 12V.5:** Efficiency vs. load current and input voltage for SQ48T/S04120 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300LFM (1.5 m/s) and  $T_a = 25^{\circ}C$ .

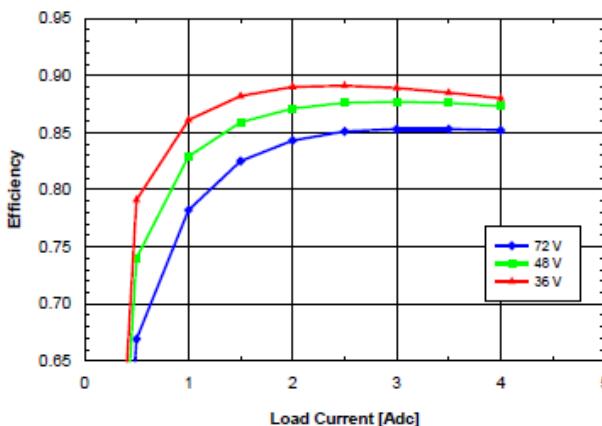

**Fig. 12V.4:** Available load current vs. ambient air temperature and airflow rates for SQ48S04120 converter mounted horizontally with  $V_{in} = 48V$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}C$ .

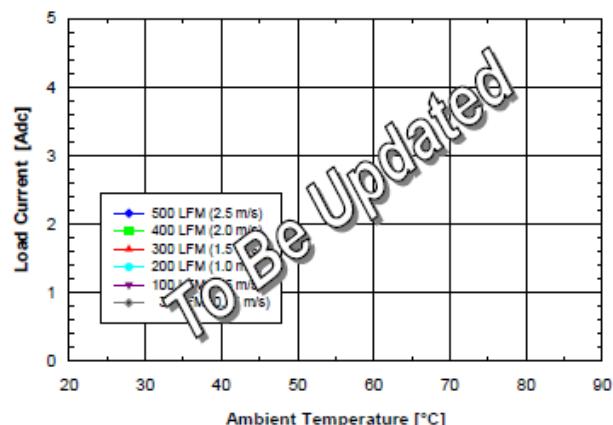


**Fig. 12V.6:** Efficiency vs. load current and ambient temperature for SQ48T/S04120 converter mounted vertically with  $V_{in} = 48V$  and air flowing from pin 3 to pin 1 at a rate of 200LFM (1.0 m/s).

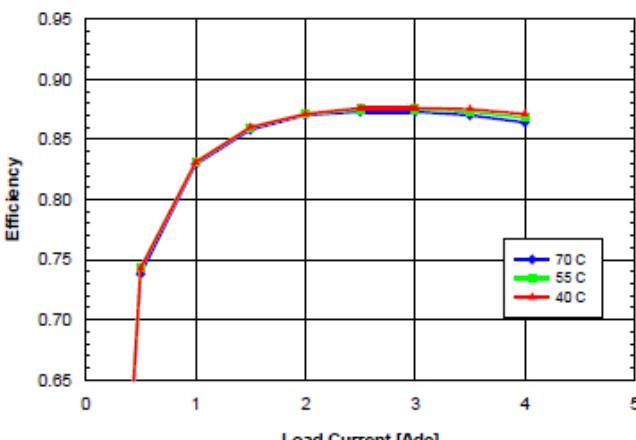


## SQ48 DC-DC Series

### SQ48T/S04120 (12 Volt Out)


**Fig. 12V.7:** Power dissipation vs. load current and input voltage for SQ48T/S04120 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ\text{C}$ .

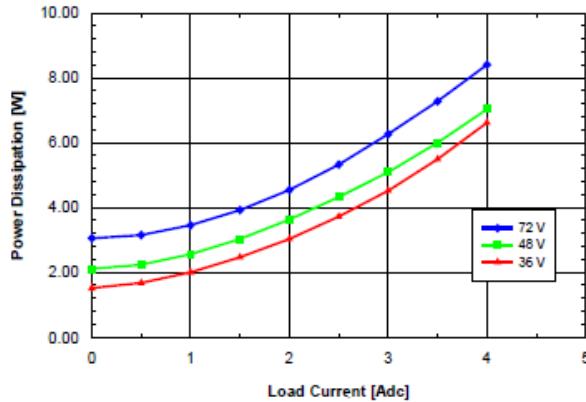


**Fig. 12V.8:** Power dissipation vs. load current and ambient temperature for SQ48T/S04120 converter mounted vertically with  $V_{in} = 48\text{V}$  and air flowing from pin 3 to pin 1 at a rate of 200LFM (1.0m/s).

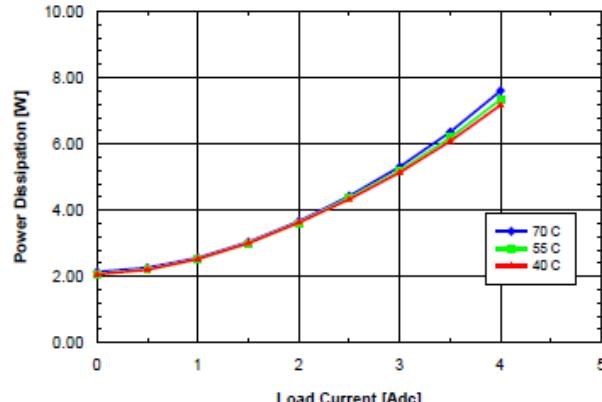

**Fig. 12V.9:** Turn-on transient at full rated load current (resistive) with no output capacitor at  $V_{in} = 48\text{V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5V/div.). Bottom trace: output voltage (5V/div.). Time scale: 1ms/div.

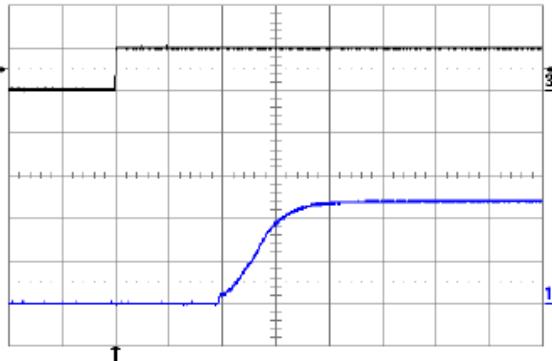


**Fig. 12V.10:** Turn-on transient at full rated load current (resistive) plus 1,000  $\mu\text{F}$  at  $V_{in} = 48\text{V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5V/div.). Bottom trace: output voltage (5V/div.). Time scale: 2ms/div.

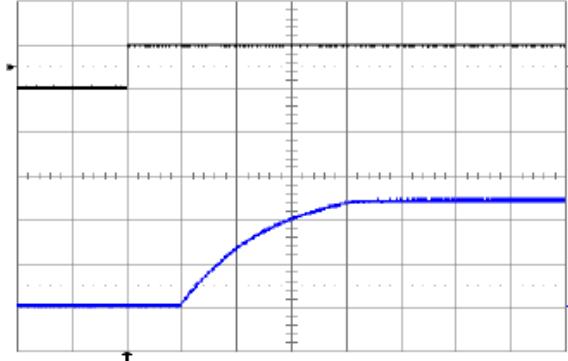


## SQ48 DC-DC Series


**Fig. 12V.11:** Output voltage response to load current step-change (1A – 2A – 1A) at  $V_{in} = 48V$ . Top trace: output voltage (200mV/div.). Bottom trace: load current (1A/div.). Current slew rate: 0.1A/ $\mu$ s.  $C_o = 1\mu F$  ceramic. Time scale: 0.5 ms/div.

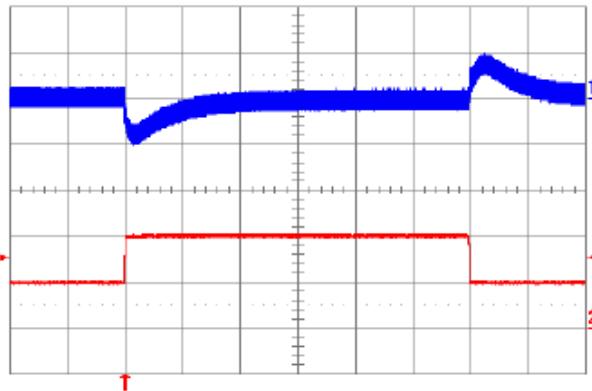


**Fig. 12V.12:** Output voltage response to load current step-change (1A – 2A – 1A) at  $V_{in} = 48V$ . Top trace: output voltage (200 mV/div.). Bottom trace: load current (1A/div.). Current slew rate: 5 A/ $\mu$ s.  $C_o = 47\mu F$  tantalum +  $1\mu F$  ceramic. Time scale: 0.5 ms/div.

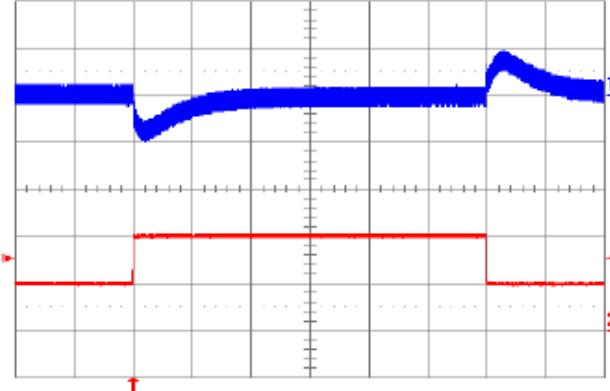

**Fig. 12V.13:** Output voltage ripple (50 mV/div.) at full rated load current into a resistive load with  $C_o = 10\mu F$  tantalum +  $1\mu F$  ceramic and  $V_{in} = 48V$ . Time scale: 1  $\mu$ s/div.

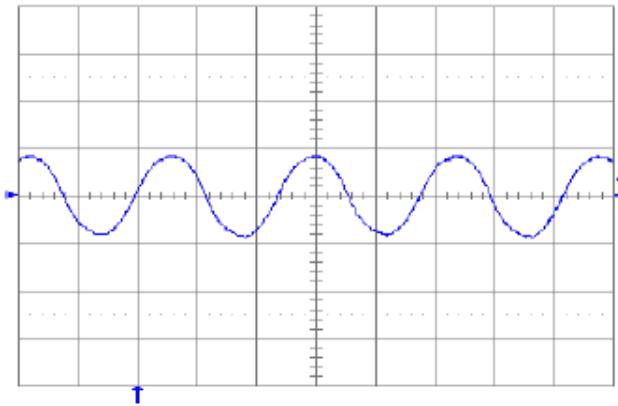


**Fig. 12V.14:** Test Setup for measuring input reflected ripple currents,  $i_o$  and  $i_s$

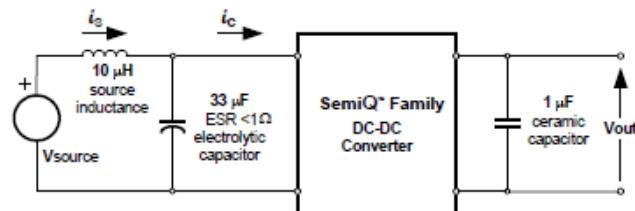


## SQ48 DC-DC Series

### SQ48T/S04120 (12 Volt Out)


**Fig. 12V.15:** Input reflected ripple current,  $i_s$  (100 mA/div.), measured at input terminals at full rated load current and  $V_{in} = 48V$ . Refer to Fig. 12V.14 for test setup. Time scale: 1  $\mu$ s/div.

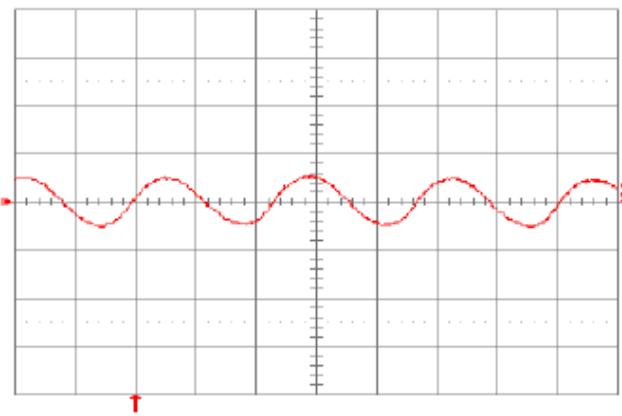


**Fig. 12V.17:** Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

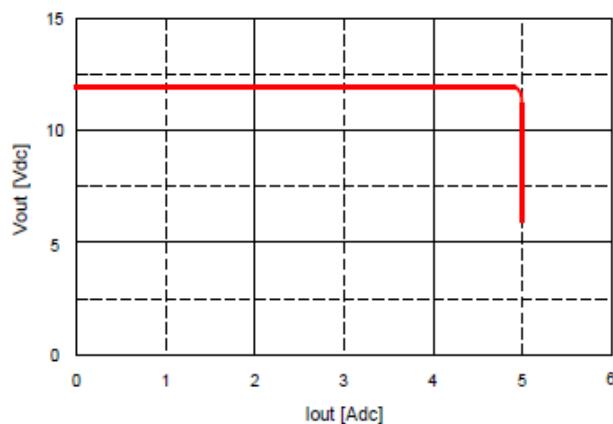

**Fig. 12V.16:** Input reflected ripple current,  $i_s$  (100 mA/div.), measured at input terminals at full rated load current and  $V_{in} = 48V$ . Refer to Fig. 12V.14 for test setup. Time scale: 1  $\mu$ s/div.

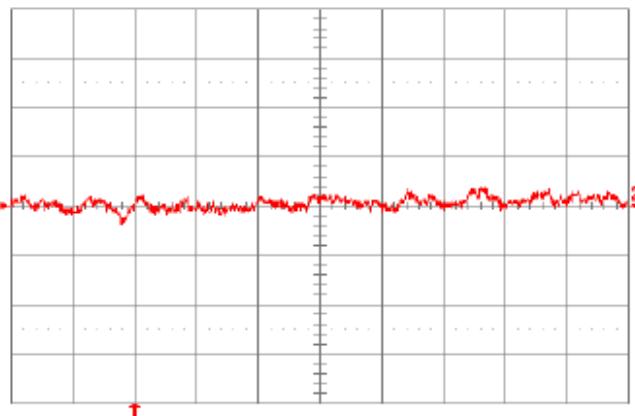

**Fig. 12V.18:** Load current (top trace, 5A/div., 20 ms/div.) into a 10 m $\Omega$  short circuit during restart, at  $V_{in} = 48V$ . Bottom trace (5A/div., 1ms/div.) is an expansion of the on-time portion of the top trace.

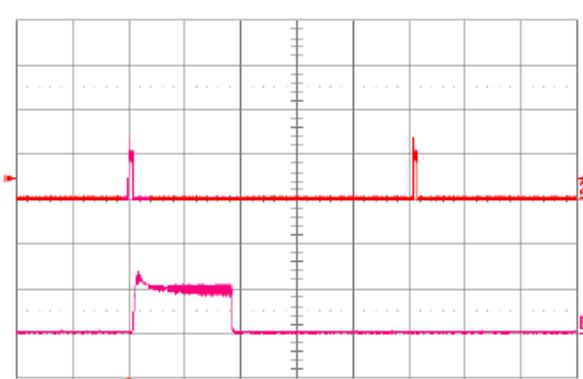


# SQ48 DC-DC Series

## Electrical Specifications: SQ48T/S05080 (8.0 Volt Out)


Conditions:  $T_A = 25^\circ\text{C}$ , Airflow = 300 LFM (1.5 m/s),  $V_{in} = 48\text{ VDC}$ ,  $V_{out} = 8.0\text{ VDC}$ , unless otherwise specified.

Parameter	Notes	Min	Typ	Max	Units
<b>Input Characteristics</b>					
Maximum Input Current	5.3 ADC, 8.0 VDC Out @ 36 VDC In			1.38	ADC
Input Stand-by Current	$V_{in} = 48\text{V}$ , converter disabled	3			mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{V}$ , converter enabled			33	mADC
Input Reflected-Ripple Current	25MHz bandwidth		6		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120HZ		TBD		dB
<b>Output Characteristics</b>					
Output Voltage Set Point (no load)		7.920	8.000	8.080	VDC
Output Regulation					
Over Line			$\pm 4$	$\pm 10$	mV
Over Load			$\pm 4$	$\pm 10$	mV
Output Voltage Range	Over line, load and temperature <sup>1</sup>	7.880		8.120	VDC
Output Ripple and Noise - 25 MHz bandwidth	Full load + 10 $\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic		70	100	$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			2,200	$\mu\text{F}$
Output Current Range		0		5.3	ADC
Current Limit Inception	Non-latching	5.75	6.25	6.75	ADC
Peak Short-Circuit Current	Non-latching, Short = 10 m $\Omega$ .		10	12	A
RMS Short-Circuit Current	Non-latching			4	Arms
<b>Dynamic Response</b>					
Load Change 25% of $I_{out}$ Max, $di/dt = 0.1\text{ A}/\mu\text{s}$	$C_o = 1\text{ }\mu\text{F}$ ceramic			160	mV
$di/dt = 5\text{ A}/\mu\text{s}$	$C_o = 94\text{ }\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic			160	mV
Settling Time to 1%			400		$\mu\text{s}$
<b>Efficiency</b>					
100% Load			85.5		%
50% Load			87.0		%
1-40 $^\circ\text{C}$ to 85 $^\circ\text{C}$ .					

**Fig. 8.0V.1:** Available load current vs. ambient air temperature and airflow rates for SQ48T05080 converter with D height pins mounted vertically with  $V_{in} = 48\text{ V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

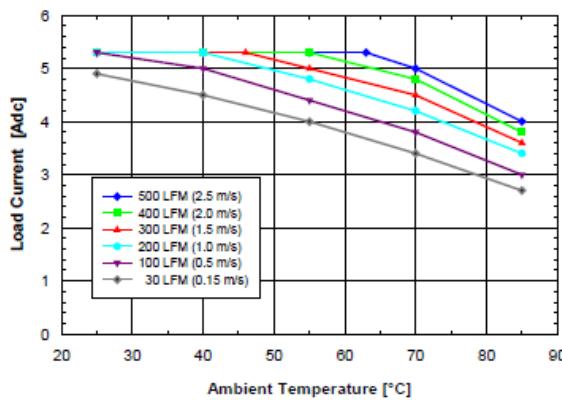


**Fig. 8.0V.2:** Available load current vs. ambient air temperature and airflow rates for SQ48T05080 converter with D height pins mounted horizontally with  $V_{in} = 48\text{ V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

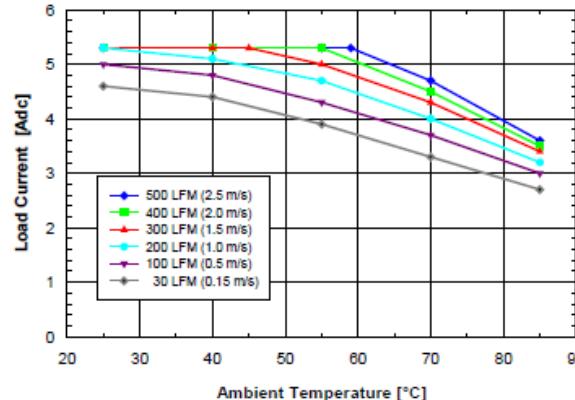


## SQ48 DC-DC Series

### SQ48T/S05080 (8.0 Volt Out)


**Fig. 8.0V.3:** Available load current vs. ambient air temperature and airflow rates for SQ48S05080 converter mounted vertically with  $V_{in} = 48V$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}C$ .

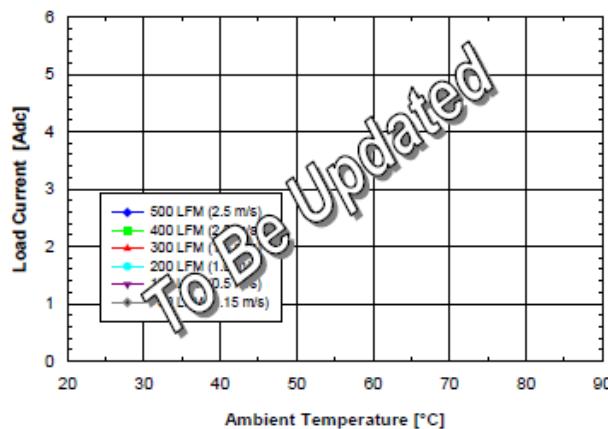


**Fig. 8.0V.5:** Efficiency vs. load current and input voltage for SQ48T/S05080 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^{\circ}C$ .

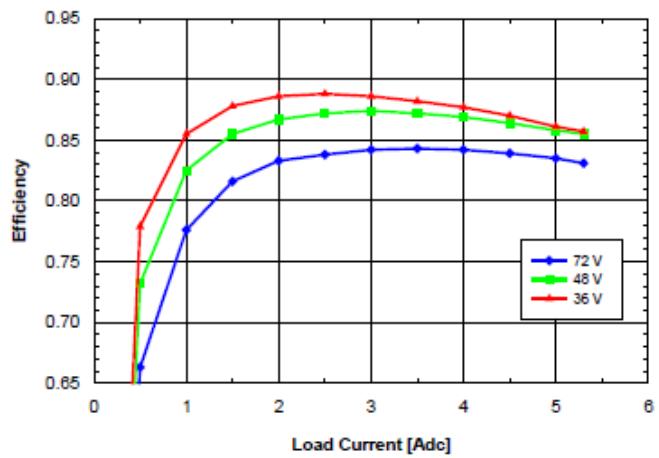

**Fig. 8.0V.4:** Available load current vs. ambient air temperature and airflow rates for SQ48S05080 converter mounted horizontally with  $V_{in} = 48V$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}C$ .

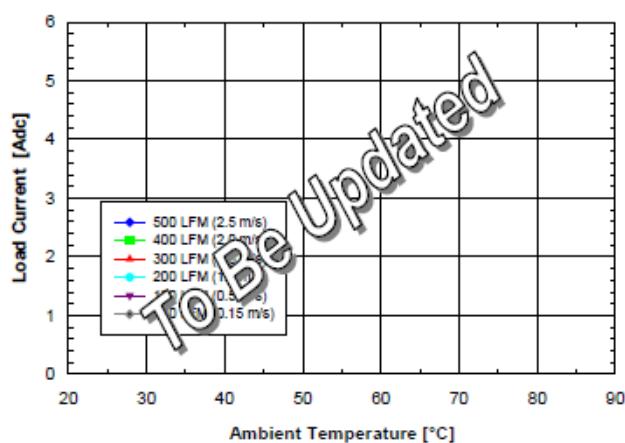


**Fig. 8.0V.6:** Efficiency vs. load current and ambient temperature for SQ48T/S05080 converter mounted vertically with  $V_{in} = 4V$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0m/s).

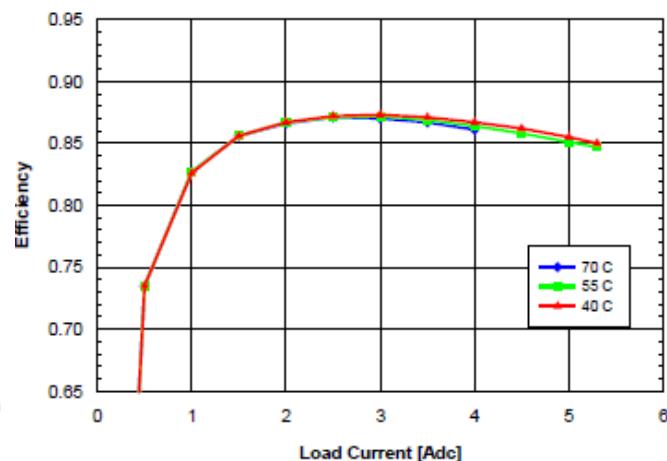


## SQ48 DC-DC Series


**Fig. 8.0V.7:** Power dissipation vs. load current and input voltage for SQ48T/S05080 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ\text{C}$ .

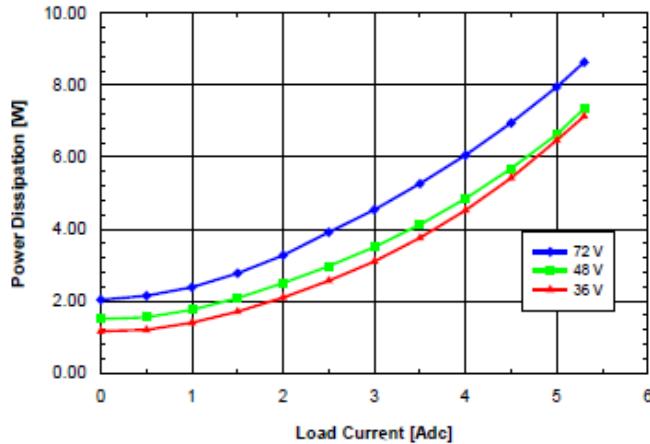


**Fig. 8.0V.9:** Turn-on transient at full rated load current (resistive) with no output capacitor at  $V_{in} = 48\text{V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (2 V/div.). Time scale: 1 ms/div.

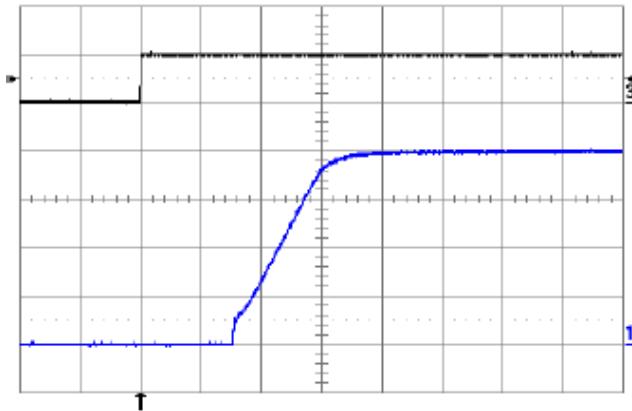

**Fig. 8.0V.8:** Power dissipation vs. load current and ambient temperature for SQ48T/S05080 converter mounted vertically with  $V_{in} = 48\text{V}$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

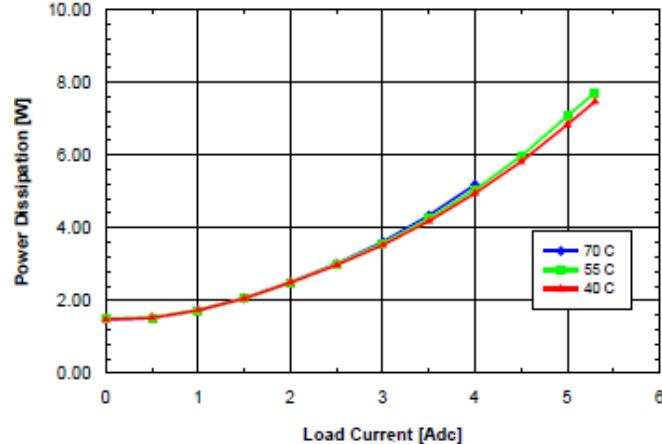


**Fig. 8.0V.10:** Turn-on transient at full rated load current (resistive) plus 2,200  $\mu\text{F}$  at  $V_{in} = 48\text{V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (2 V/div.). Time scale: 2 ms/div.

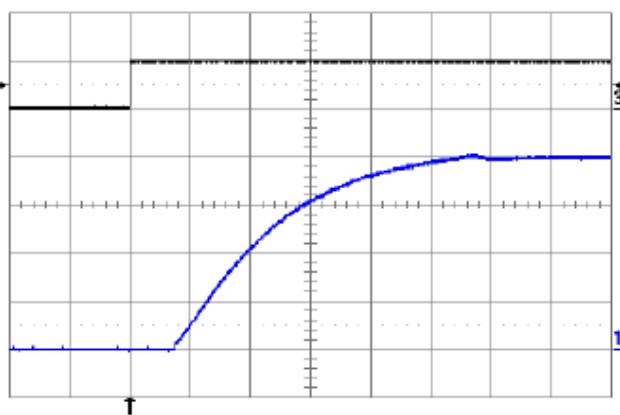


## SQ48 DC-DC Series

### SQ48T/S05080 (8.0 Volt Out)


**Fig. 8.0V.11:** Output voltage response to load current step-change (1.325A – 2.65A – 1.325A) at Vin = 48V. Top trace: output voltage (200 mV/div.). Bottom trace: load current (1 A/div.). Current slew rate: 0.1 A/μs. Co = 1 μF ceramic. Time scale: 0.5 ms/div.

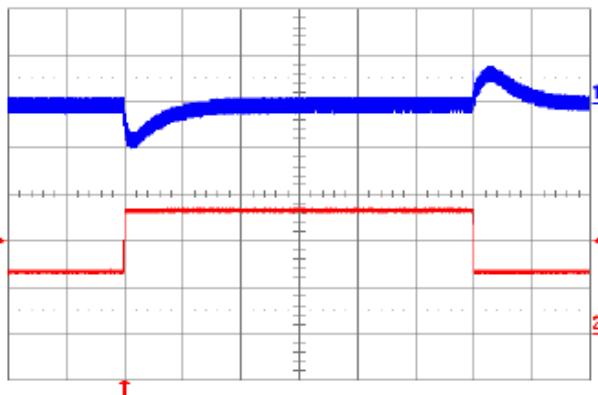


**Fig. 8.0V.13:** Output voltage ripple (50 mV/div.) at full rated load current into a resistive load with Co = 10 μF tantalum + 1μF ceramic and Vin = 48V. Time scale: 1μs/div.

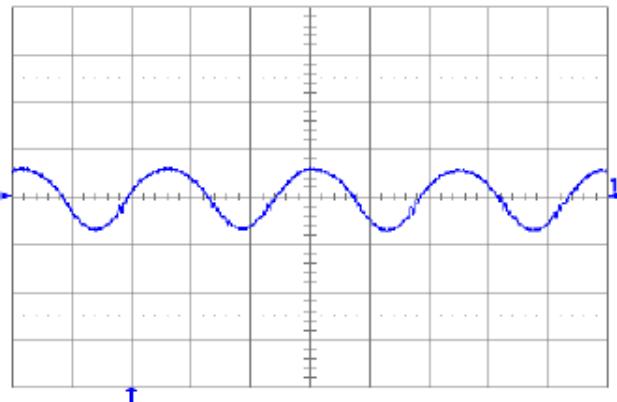

**Fig. 8.0V.12:** Output voltage response to load current step-change (1.325A – 2.65A – 1.325A) at Vin = 48V. Top trace: output voltage (200 mV/div.). Bottom trace: load current (1 A/div.). Current slew rate: 5 A/μs. Co = 94μF tantalum + 1μF ceramic. Time scale: 0.5 ms/div.

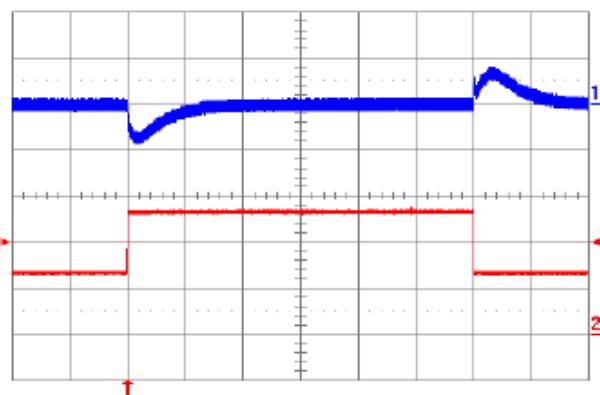


**Fig. 8.0V.14:** Test Setup for measuring input reflected ripple currents,  $i_s$  and  $i_c$

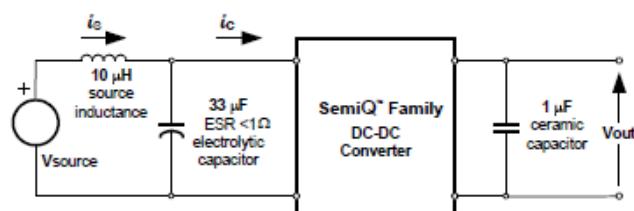


## SQ48 DC-DC Series

### SQ48T/S05080 (8.0 Volt Out)


**Fig. 8.0V.15:** Input reflected ripple current,  $i_s$  (100 mA/div.), measured at input terminals at full rated load current and  $V_{in} = 48V$ . Refer to Fig. 8.0V.14 for test setup. Time scale: 1 $\mu$ s/div.

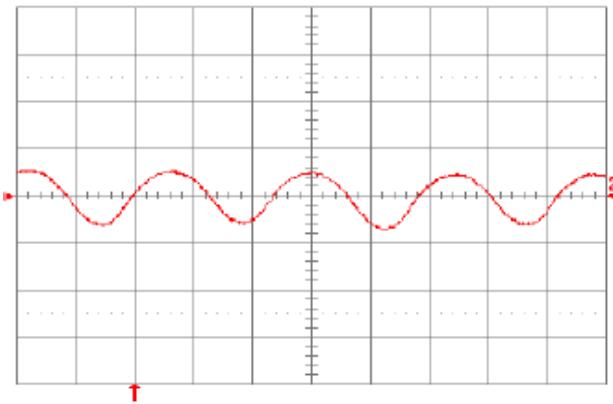


**Fig. 8.0V.17:** Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

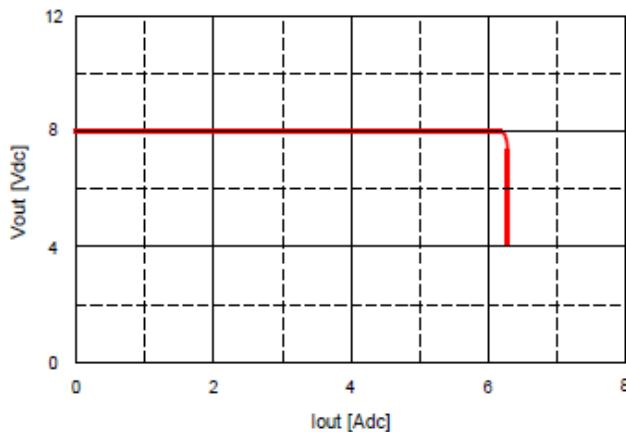

**Fig. 8.0V.16:** Input reflected ripple current,  $i_s$  (10 mA/div.), measured through 10 $\mu$ H at the source at full rated load current and  $V_{in} = 48V$ . Refer to Fig. 8.0V.14 for test setup. Time scale: 1 $\mu$ s/div.

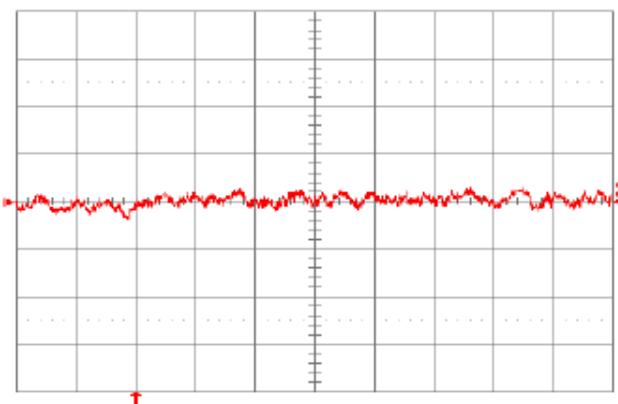

**Fig. 8.0V.18:** Load current (top trace, 5A/div., 20 ms/div.) into a 10 m $\Omega$  short circuit during restart, at  $V_{in} = 48V$ . Bottom trace (5 A/div., 1 ms/div.) is an expansion of the on-time portion of the top trace.

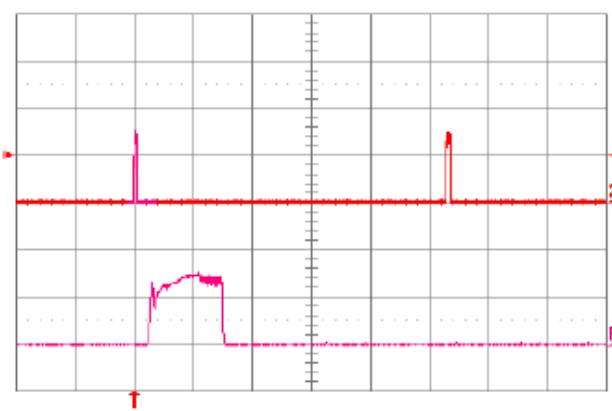

# SQ48 DC-DC Series

## Electrical Specifications: SQ48T/S08060 (6.0 Volt Out)

Conditions:  $T_A = 25^\circ\text{C}$ , Airflow = 300 LFM (1.5 m/s),  $V_{in} = 48\text{ VDC}$ ,  $V_{out} = 6.0\text{ VDC}$ , unless otherwise specified.


Parameter	Notes	Min	Typ	Max	Units
<b>Input Characteristics</b>					
Maximum Input Current	8 ADC, 6.0 VDC Out @ 36 VDC In			1.5	ADC
Input Stand-by Current	$V_{in} = 48\text{V}$ , converter disabled		3		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{V}$ , converter enabled		45		mADC
Input Reflected-Ripple Current	25MHz bandwidth		6		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120HZ		TBD		dB
<b>Output Characteristics</b>					
Output Voltage Set Point (no load)		5.940	6.000	6.060	VDC
Output Regulation					
Over Line			$\pm 2$	$\pm 10$	mV
Over Load			$\pm 2$	$\pm 10$	mV
Output Voltage Range	Over line, load and temperature <sup>1</sup>	5.910		6.090	VDC
Output Ripple and Noise - 25 MHz bandwidth	Full load + 10 $\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic		45	60	$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			10,000	$\mu\text{F}$
Output Current Range		0		8	ADC
Current Limit Inception	Non-latching	8.4	10	11.5	ADC
Peak Short-Circuit Current	Non-latching, Short = 10 m $\Omega$ .		15	25	A
RMS Short-Circuit Current	Non-latching			5.3	Arms
<b>Dynamic Response</b>					
Load Change 25% of $I_{out}$ Max, $di/dt = 0.1\text{ A}/\mu\text{s}$	$C_o = 1\text{ }\mu\text{F}$ ceramic		160		mV
$di/dt = 5\text{ A}/\mu\text{s}$	$C_o = 450\text{ }\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic		80		mV
Settling Time to 1%			200		$\mu\text{s}$
<b>Efficiency</b>					
100% Load			89.0		%
50% Load			89.0		%

<sup>1</sup>-40 °C to 85 °C.


**Fig. 6.0V.1:** Available load current vs. ambient air temperature and airflow rates for SQ48T08060 converter with D height pins mounted vertically with  $V_{in} = 48\text{V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

**Fig. 6.0V.2:** Available load current vs. ambient air temperature and airflow rates for SQ48T08060 converter with D height pins mounted horizontally with  $V_{in} = 48\text{V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .


## SQ48 DC-DC Series

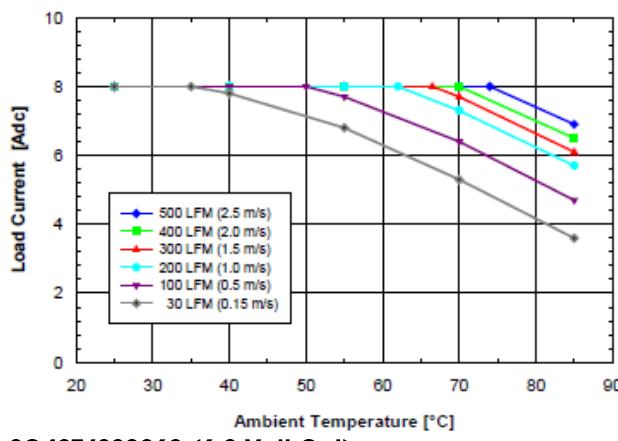
**SQ48T/S08060 (6.0 Volt Out)**


**Fig. 6.0V.3:** Available load current vs. ambient air temperature and airflow rates for SQ48T/S08060 converter mounted vertically with  $V_{in} = 48V$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}C$ .

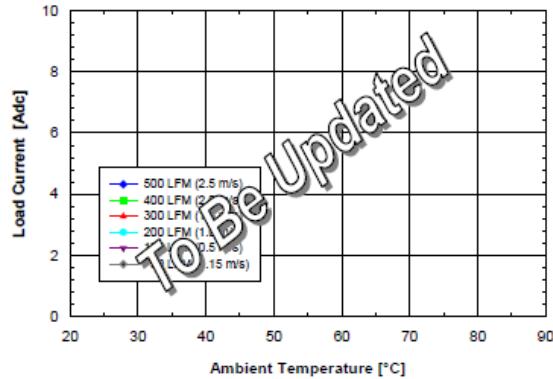

**Fig. 6.0V.5:** Efficiency vs. load current and input voltage for SQ48T/S08060 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^{\circ}C$ .


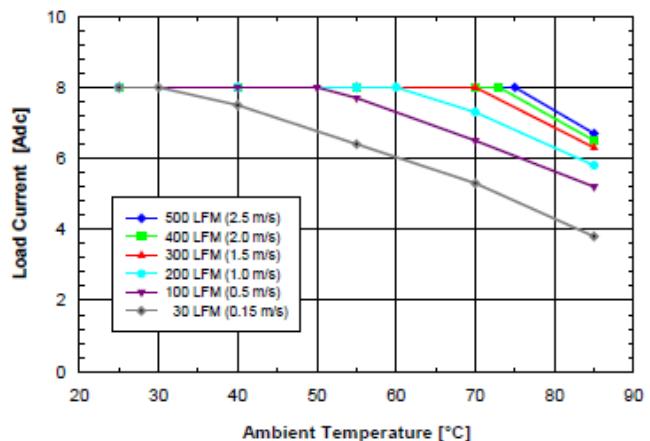


**Fig. 6.0V.4:** Available load current vs. ambient air temperature and airflow rates for SQ48T/S08060 converter mounted horizontally with  $V_{in} = 48V$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}C$ .

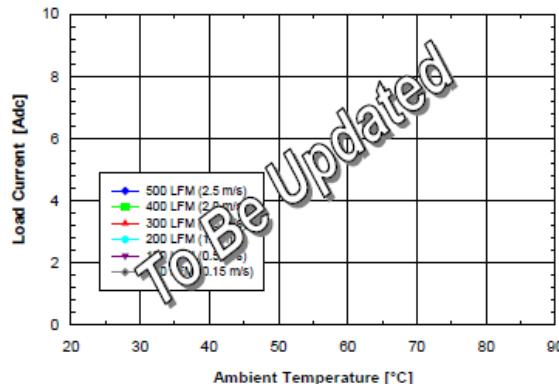


**Fig. 6.0V.6:** Efficiency vs. load current and ambient temperature for SQ48T/S08060 converter mounted vertically with  $V_{in} = 48V$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

## SQ48 DC-DC Series

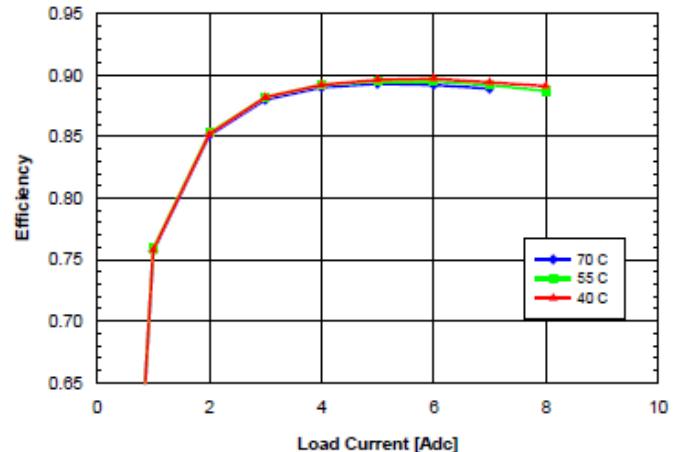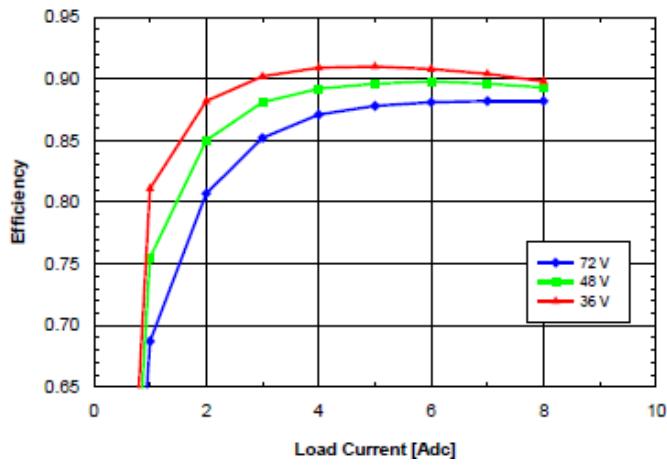


### SQ48T/S08060 (6.0 Volt Out)

**Fig. 6.0V.7:** Power dissipation vs. load current and input voltage for SQ48T/S08060 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ\text{C}$ .

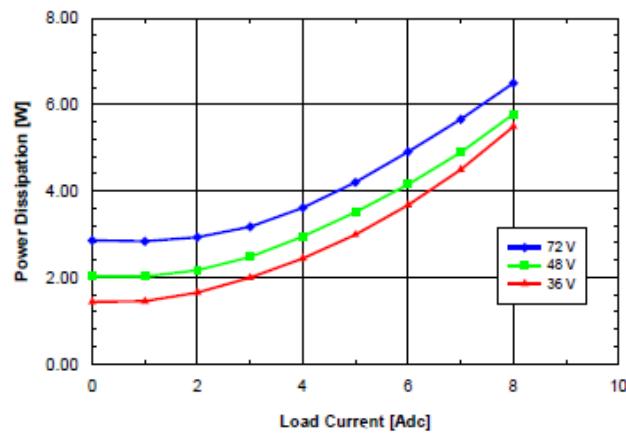



**Fig. 6.0V.9:** Turn-on transient at full rated load current (resistive) with no output capacitor at  $V_{in} = 48V$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (2V/div.). Time scale: 2 ms/div.

**Fig. 6.0V.8:** Power dissipation vs. load current and ambient temperature for SQ48T/S08060 converter mounted vertically with  $V_{in} = 48V$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

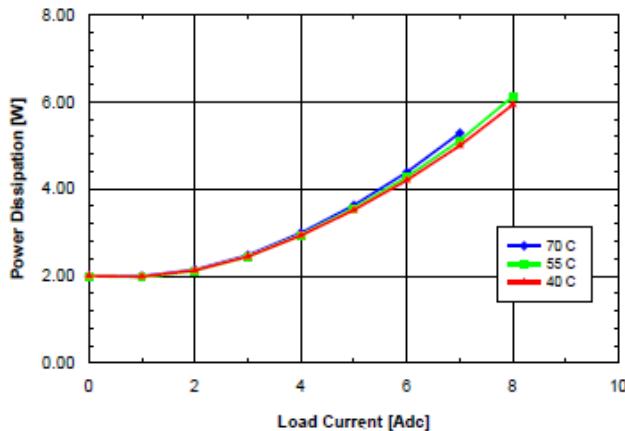


**Fig. 6.0V.10:** Turn-on transient at full rated load current (resistive) plus 10,000  $\mu\text{F}$  at  $V_{in} = 48V$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (2V/div.). Time scale: 5 ms/div.

## SQ48 DC-DC Series

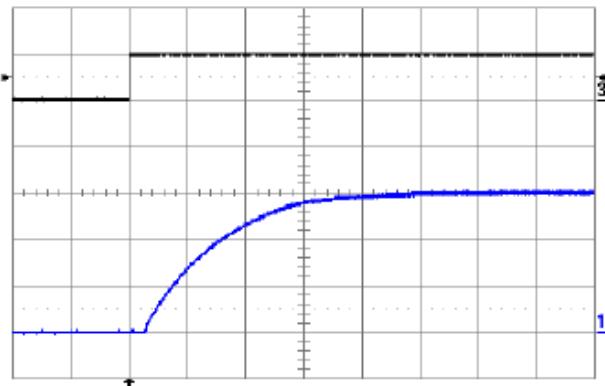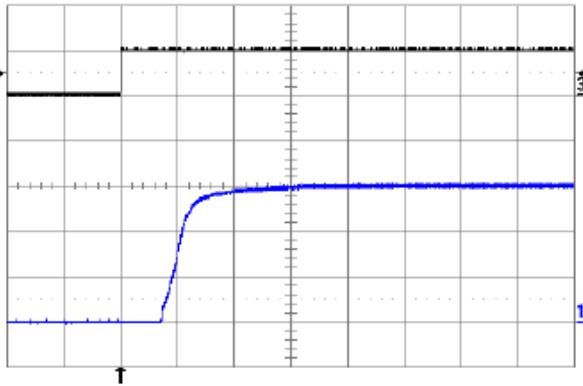


**Fig. 6.0V.11:** Output voltage response to load current step-change (2 A – 4 A – 2 A) at  $V_{in} = 48V$ . Top trace: output voltage (100 mV/div.). Bottom trace: load current (2 A/div.). Current slew rate: 0.1A/μs.  $C_o = 1\mu F$  ceramic. Time scale: 0.2 ms/div.

**Fig. 6.0V.12:** Output voltage response to load current step-change (2 A – 4 A – 2 A) at  $V_{in} = 48V$ . Top trace: output voltage (100 mV/div.). Bottom trace: load current (2 A/div.). Current slew rate: 5A/μs.  $C_o = 450\mu F$  tantalum + 1μF ceramic. Time scale: 0.2ms/div.


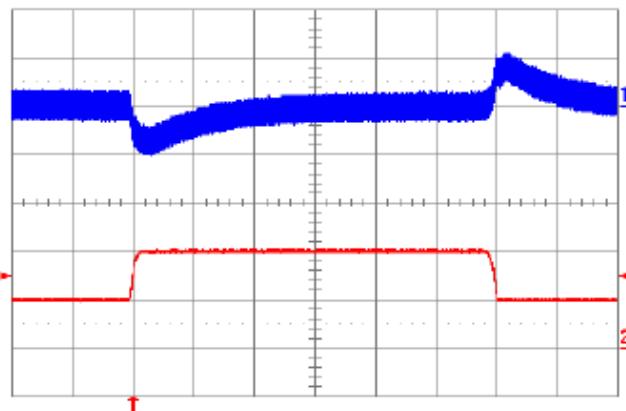


**Fig. 6.0V.13:** Output voltage ripple (50mV/div.) at full rated load current into a resistive load with  $C_o = 10 \mu F$  tantalum + 1μF ceramic and  $V_{in} = 48V$ . Time scale: 1μs/div.

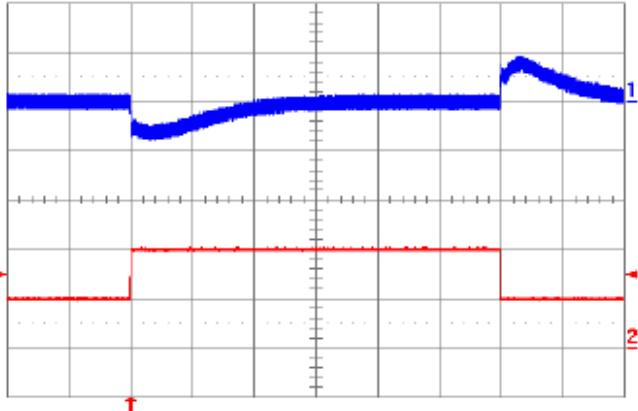


**Fig. 6.0V.14:** Test Setup for measuring input reflected ripple currents,  $i_c$  and  $i_s$

## SQ48 DC-DC Series

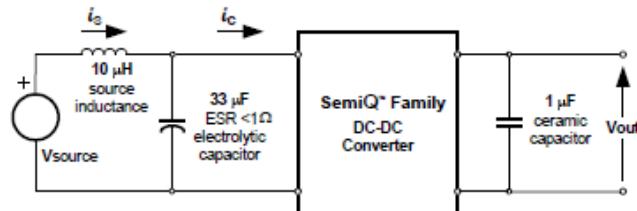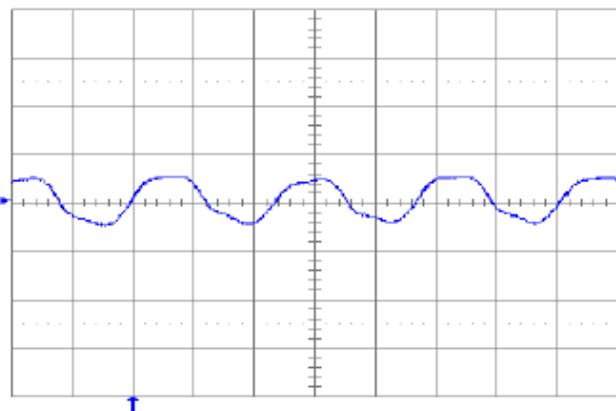


### SQ48T/S08060 (6.0 Volt Out)

**Fig. 6.0V.15:** Input reflected ripple current,  $i_s$  (100 mA/div.), measured at input terminals at full rated load current and  $V_{in} = 48V$ . Refer to Fig. 6.0V.14 for test setup. Time scale: 1  $\mu s$ /div.

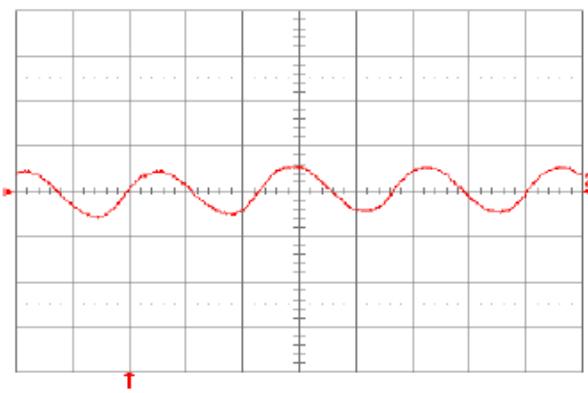

**Fig. 6.0V.16:** Input reflected ripple current,  $i_s$  (100 mA/div.), measured through 10  $\mu H$  at the source at full rated load current and  $V_{in} = 48V$ . Refer to Fig. 6.0V.14 for test setup. Time scale: 1  $\mu s$ /div.

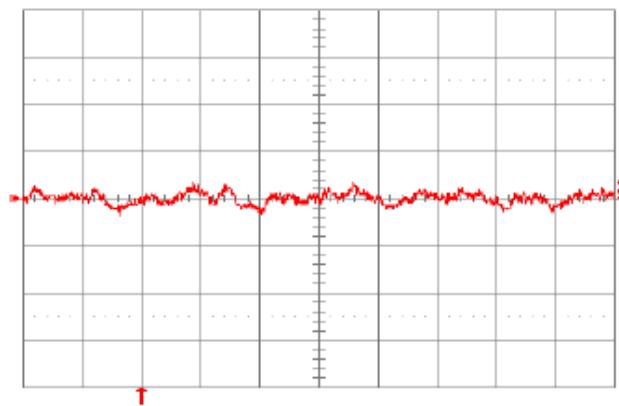

**Fig. 6.0V.17:** Output voltage vs. load current showing

**Fig. 6.0V.18:** Load current (top trace, 10A/div.,


866.513.2839

tech.support@psbel.com


[belpowersolutions.com](http://belpowersolutions.com)

## SQ48 DC-DC Series

current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

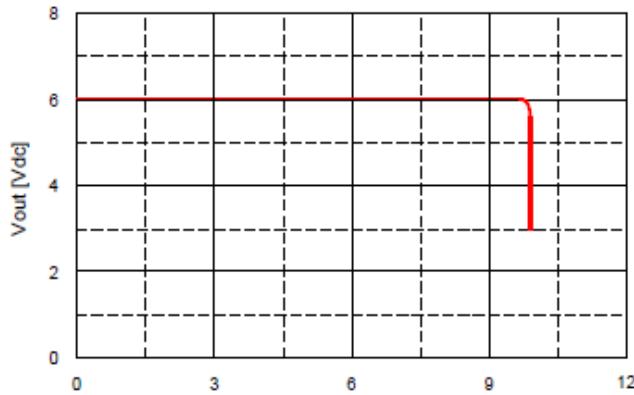

20 ms/div.) into a 10 mΩ short circuit during restart, at  $V_{in} = 48V$ . Bottom trace (10A/div., 1ms/div.) is an expansion of the on-time portion of the top trace.

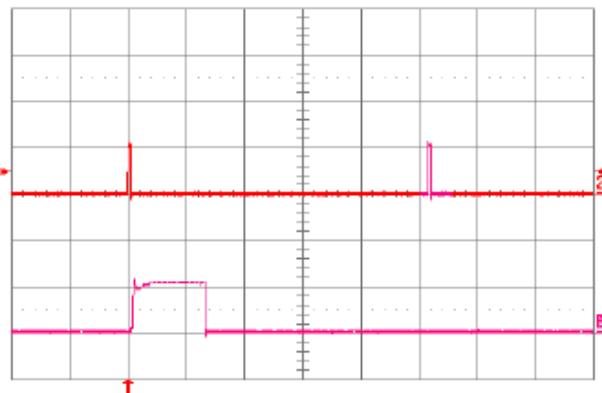

### Electrical Specifications: SQ48T/S10050 (5.0 Volt Out)

Conditions:  $T_A = 25^\circ C$ , Airflow = 300 LFM (1.5 m/s),  $V_{in} = 48 VDC$ ,  $V_{out} = 5.0 VDC$ , unless otherwise specified.

Parameter	Notes	Min	Typ	Max	Units
<b>Input Characteristics</b>					
Maximum Input Current	10 ADC, 5.0 VDC Out @ 36 VDC In			1.65	ADC
Input Stand-by Current	$V_{in} = 48V$ , converter disabled		2.6		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48V$ , converter enabled		40		mADC
Input Reflected-Ripple Current	25MHz bandwidth		6		$mA_{PK-PK}$
Input Voltage Ripple Rejection	120HZ		TBD		dB
<b>Output Characteristics</b>					
Output Voltage Set Point (no load)		4.950	5.000	5.050	VDC
Output Regulation					
Over Line			$\pm 2$	$\pm 5$	mV
Over Load			$\pm 2$	$\pm 5$	mV
Output Voltage Range	Over line, load and temperature <sup>1</sup>	4.925		5.075	VDC
Output Ripple and Noise - 25 MHz bandwidth	Full load + 10 $\mu F$ tantalum + 1 $\mu F$ ceramic		45	80	$mV_{PK-PK}$
External Load Capacitance	Plus full load (resistive)			10,000	$\mu F$
Output Current Range		0		10	ADC
Current Limit Inception	Non-latching	10.5	12.5	14	ADC

866.513.2839


tech.support@psbel.com

belpowersolutions.com

## SQ48 DC-DC Series


Peak Short-Circuit Current	Non-latching, Short =10 mΩ.	20	30	A
RMS Short-Circuit Current	Non-latching	5.3		Arms
<b>Dynamic Response</b>				
Load Change 25% of Iout Max, di/dt = 0.1 A/μs	Co = 1 μF ceramic	200		mV
di/dt = 5 A/μs	Co = 450 μF tantalum + 1 μF ceramic	180		mV
Settling Time to 1%		400		μs
<b>Efficiency</b>				
100% Load		87.0		%
50% Load		88.0		%
1-40 °C to 85 °C.				

**Fig. 5.0V.1:** Available load current vs. ambient air temperature and airflow rates for SQ48T10050 converter with D height pins mounted vertically with Vin = 48V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}\text{C}$ .

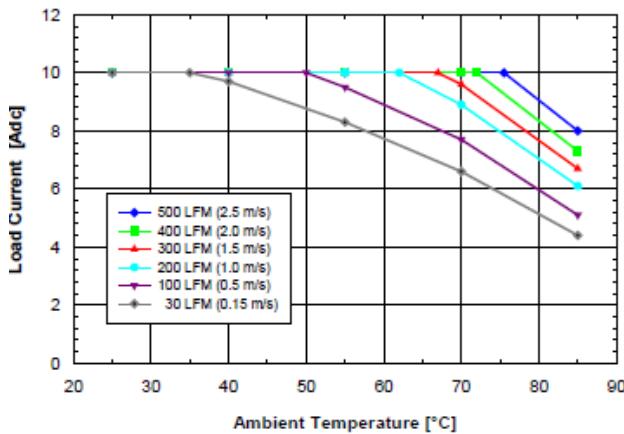


### SQ48T/S10050 (5.0 Volt Out)


**Fig. 5.0V.3:** Available load current vs. ambient air temperature and airflow rates for SQ48S10050 converter mounted vertically with Vin = 48V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}\text{C}$ .

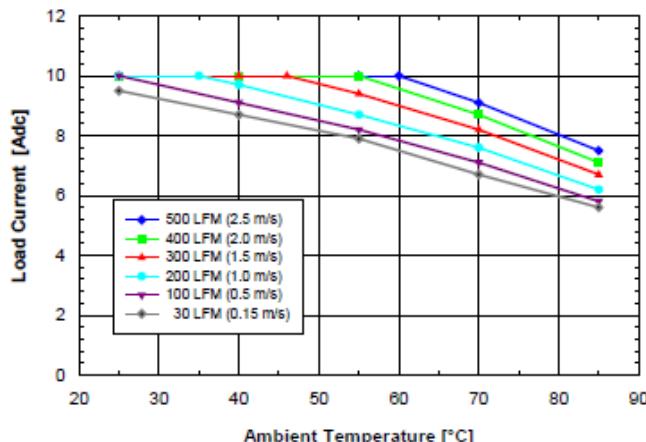

**Fig. 5.0V.2:** Available load current vs. ambient air temperature and airflow rates for SQ48T10050 converter with D height pins mounted horizontally with Vin = 48V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}\text{C}$ .

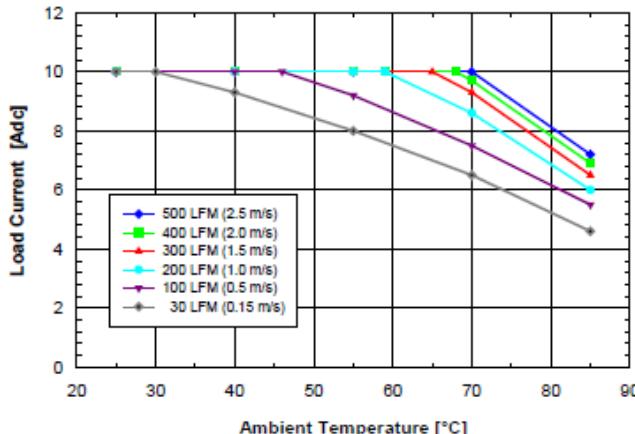


**Fig. 5.0V.4:** Available load current vs. ambient air temperature and airflow rates for SQ48S10050 converter mounted horizontally with Vin = 48V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}\text{C}$ .

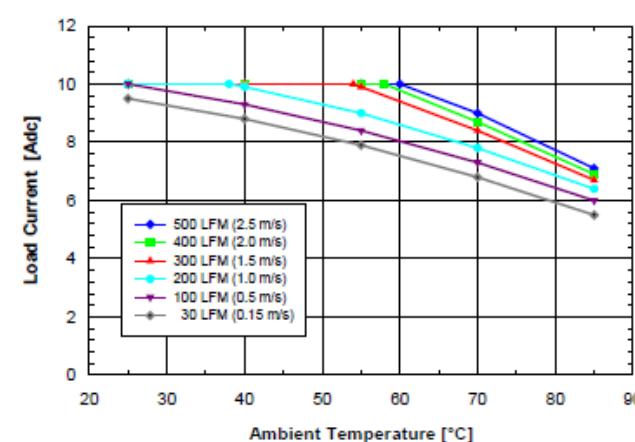


## SQ48 DC-DC Series

**Fig. 5.0V.5:** Efficiency vs. load current and input voltage for SQ48T/S10050 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ C$ .

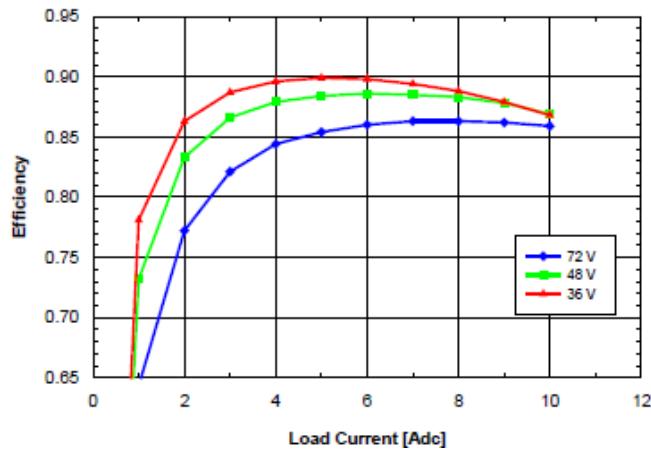


**Fig. 5.0V.6:** Efficiency vs. load current and ambient temperature for SQ48T/S10050 converter mounted vertically with  $V_{in} = 48V$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

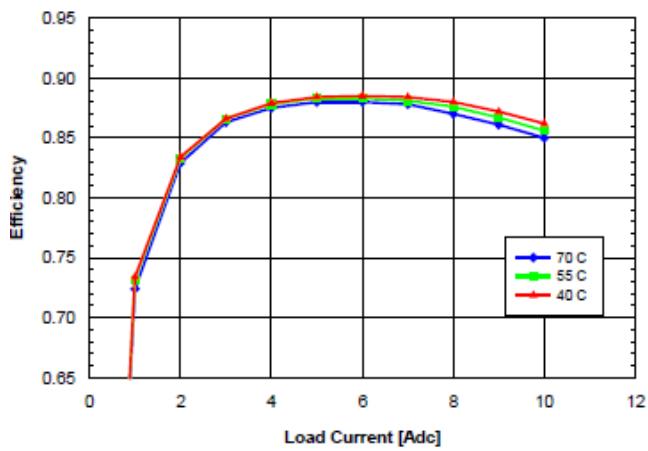


### SQ48T/S10050 (5.0 Volt Out)

**Fig. 5.0V.7:** Power dissipation vs. load current and input voltage for SQ48T/S10050 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ C$ .

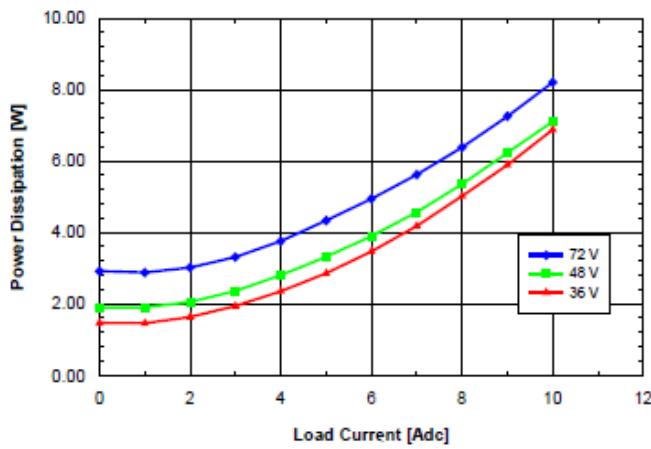


**Fig. 5.0V.8:** Power dissipation vs. load current and ambient temperature for SQ48T/S10050 converter mounted vertically with  $V_{in} = 48V$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

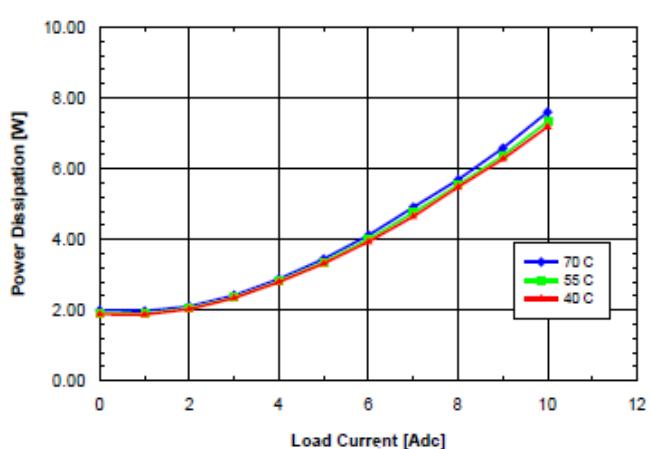


## SQ48 DC-DC Series

**Fig. 5.0V.9:** Turn-on transient at full rated load current (resistive) with no output capacitor at  $V_{in} = 48V$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (2 V/div.). Time scale: 2ms/div.

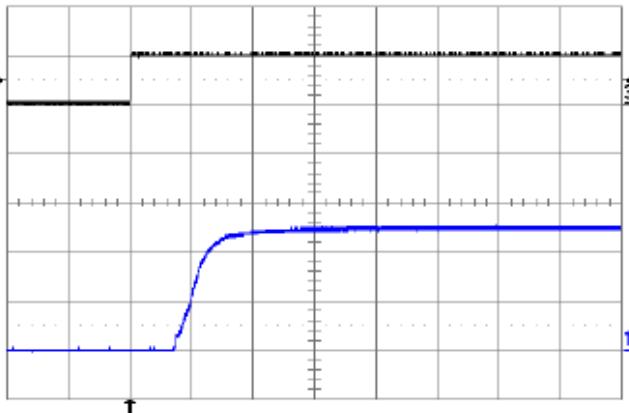


**Fig. 5.0V.10:** Turn-on transient at full rated load current (resistive) plus 10,000  $\mu F$  at  $V_{in} = 48V$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (2 V/div.). Time scale: 2ms/div.

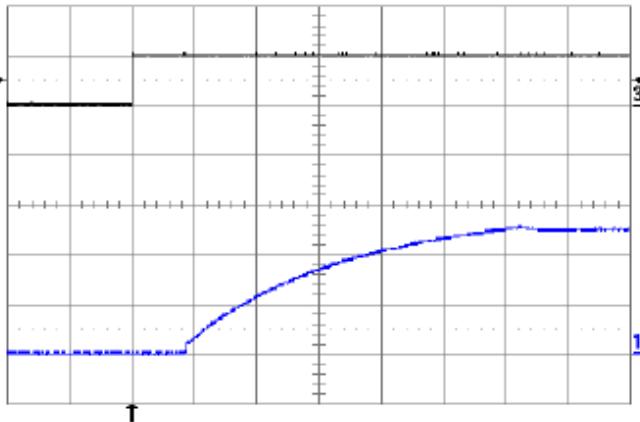


### SQ48T/S10050 (5.0 Volt Out)

**Fig. 5.0V.11:** Output voltage response to load current step-change (2.5A – 5A – 2.5A) at  $V_{in} = 48V$ . Top trace: output voltage (200 mV/div.). Bottom trace: load current (2 A/div.). Current slew rate: 0.1A/ $\mu$ s.  $C_o = 1\mu F$  ceramic. Time scale: 0.2ms/div.

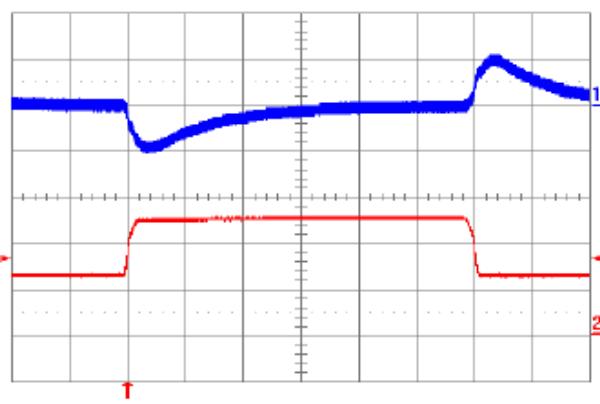


**Fig. 5.0V.12:** Output voltage response to load current step-change (2.5A – 5A – 2.5A) at  $V_{in} = 48V$ . Top trace: output voltage (200 mV/div.). Bottom trace: load current (2A/div.). Current slew rate: 5A/ $\mu$ s.  $C_o = 450\mu F$  tantalum + 1 $\mu F$  ceramic. Time scale: 0.2 ms/div.

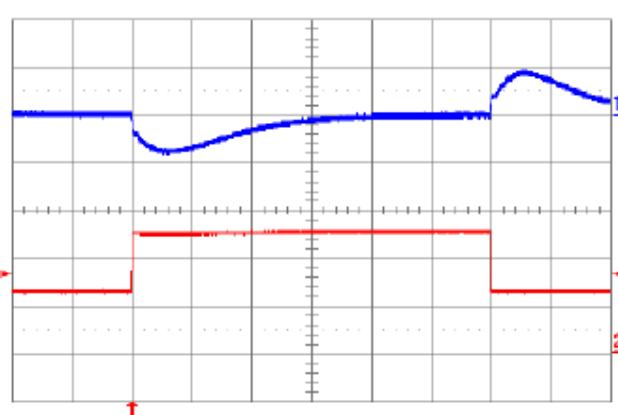


## SQ48 DC-DC Series

**Fig. 5.0V.13:** Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with  $C_o = 10 \mu F$  tantalum + 1  $\mu F$  ceramic and  $V_{in} = 48V$ . Time scale: 1  $\mu s$ /div.

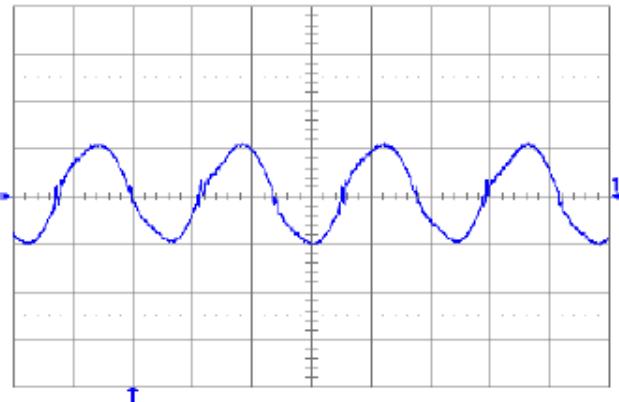


**Fig. 5.0V.14:** Test Setup for measuring input reflected ripple currents,  $i_c$  and  $i_s$ .

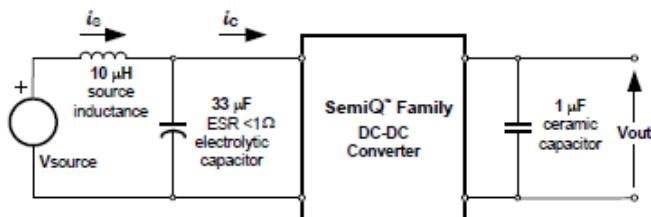


### SQ48T/S10050 (5.0 Volt Out)

**Fig. 5.0V.15:** Input reflected ripple current,  $i_c$  (100 mA/div.), measured at input terminals at full rated load current and  $V_{in} = 48V$ . Refer to Fig. 5.0V.14 for test setup. Time scale: 1  $\mu s$ /div.

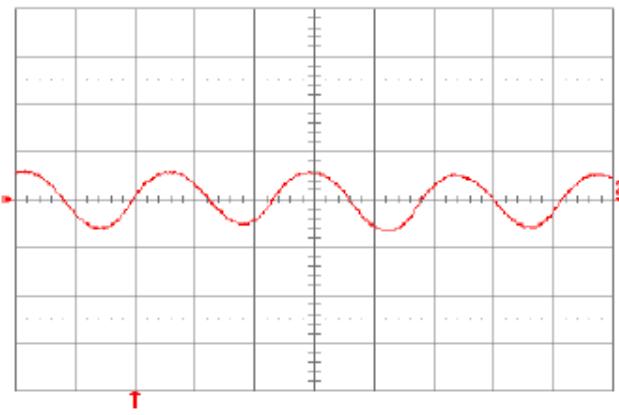

**Fig. 5.0V.16:** Input reflected ripple current,  $i_s$  (10 mA/div.), measured through 10  $\mu H$  at the source at full rated load current and  $V_{in} = 48V$ . Refer to Fig. 5.0V.14 for test setup. Time scale: 1  $\mu s$ /div.

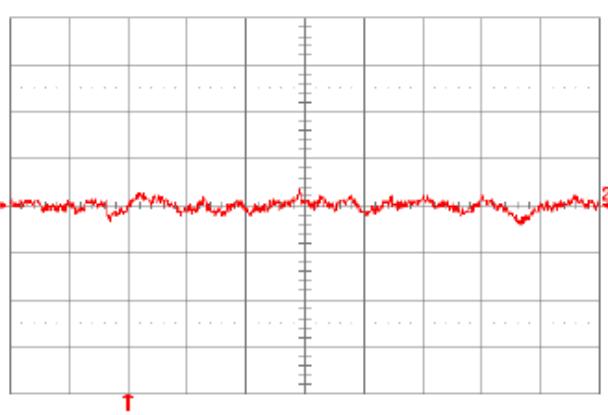

**Fig. 5.0V.17:** Output voltage vs. load current showing current limit point and converter shutdown point. Input

**Fig. 5.0V.18:** Load current (top trace, 10A/div., 20 ms/div.) into a 10 m $\Omega$  short circuit during restart, at


866.513.2839

tech.support@psbel.com


belpowersolutions.com

## SQ48 DC-DC Series

voltage has almost no effect on current limit characteristic.

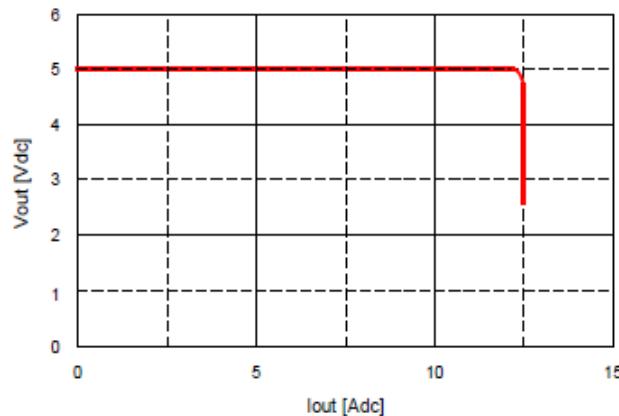

$V_{in} = 48V$ . Bottom trace (10A/div., 1ms/div.) is an expansion of the on-time portion of the top trace.

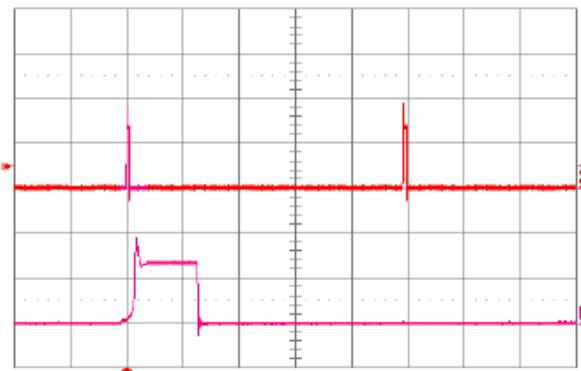

### Electrical Specifications: SQ48T/S15033 (3.3 Volt Out)

Conditions:  $T_A = 25^\circ C$ , Airflow = 300 LFM (1.5 m/s),  $V_{in} = 48 VDC$ ,  $V_{out} = 3.3 VDC$ , unless otherwise specified.

Parameter	Notes	Min	Typ	Max	Units
<b>Input Characteristics</b>					
Maximum Input Current	15 ADC, 3.3 VDC Out @ 36 VDC In			1.6	ADC
Input Stand-by Current	$V_{in} = 48V$ , converter disabled		2.6		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48V$ , converter enabled		42		mADC
Input Reflected-Ripple Current	25MHz bandwidth		6		$mA_{PK-PK}$
Input Voltage Ripple Rejection	120HZ		TBD		dB
<b>Output Characteristics</b>					
Output Voltage Set Point (no load)		3.267	3.300	3.333	VDC
Output Regulation					
Over Line			$\pm 2$	$\pm 5$	mV
Over Load			$\pm 2$	$\pm 5$	mV
Output Voltage Range	Over line, load and temperature <sup>1</sup>	3.250		3.350	VDC
Output Ripple and Noise - 25 MHz bandwidth	Full load + 10 $\mu F$ tantalum + 1 $\mu F$ ceramic		30	50	$mV_{PK-PK}$
External Load Capacitance	Plus full load (resistive)			15,000	$\mu F$
Output Current Range		0		15	ADC
Current Limit Inception	Non-latching	15.75	18	20	ADC

866.513.2839


tech.support@psbel.com

belpowersolutions.com

## SQ48 DC-DC Series


Peak Short-Circuit Current	Non-latching, Short =10 mΩ.	30	40	A
RMS Short-Circuit Current	Non-latching	5.3		Arms
<b>Dynamic Response</b>				
Load Change 25% of Iout Max, di/dt = 0.1 A/μs	Co = 1 μF ceramic	80		mV
di/dt = 5 A/μs	Co = 450 μF tantalum + 1 μF ceramic	140		mV
Settling Time to 1%		100		μs
<b>Efficiency</b>				
100% Load		89.5		%
50% Load		89.5		%
1-40 °C to 85 °C.				

**Fig. 3.3V.1:** Available load current vs. ambient air temperature and airflow rates for SQ48T15033 converter with D height pins mounted vertically with Vin = 48V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}\text{C}$ .

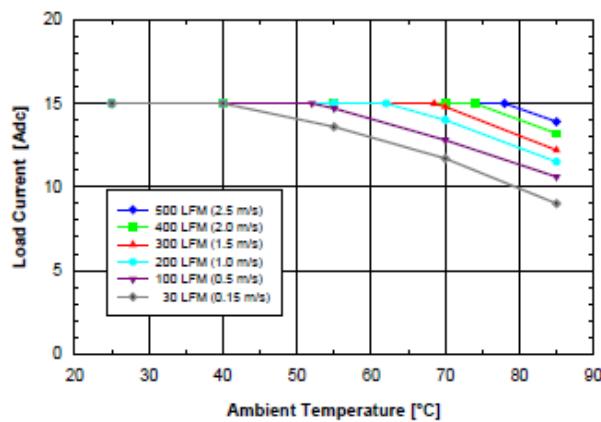


### SQ48T/S15033 (3.3 Volt Out)


**Fig. 3.3V.3:** Available load current vs. ambient air temperature and airflow rates for SQ48S15033 converter mounted vertically with Vin = 48V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}\text{C}$ .

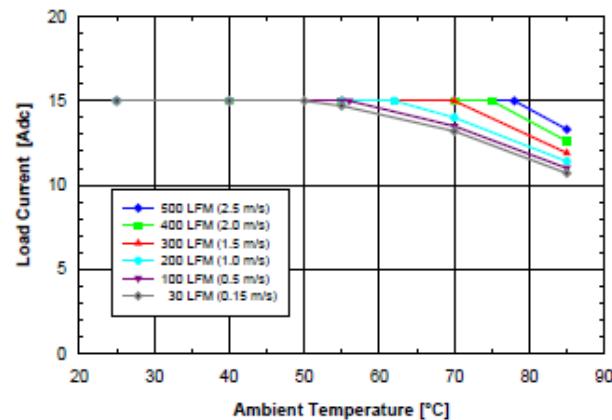

**Fig. 3.3V.1:** Available load current vs. ambient air temperature and airflow rates for SQ48T15033 converter with D height pins mounted horizontally with Vin = 48V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}\text{C}$ .

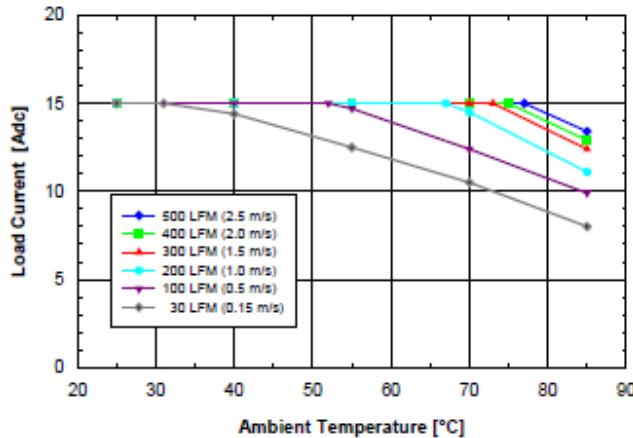


**Fig. 3.3V.4:** Available load current vs. ambient air temperature and airflow rates for SQ48S15033 converter mounted horizontally with Vin = 48V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^{\circ}\text{C}$ .

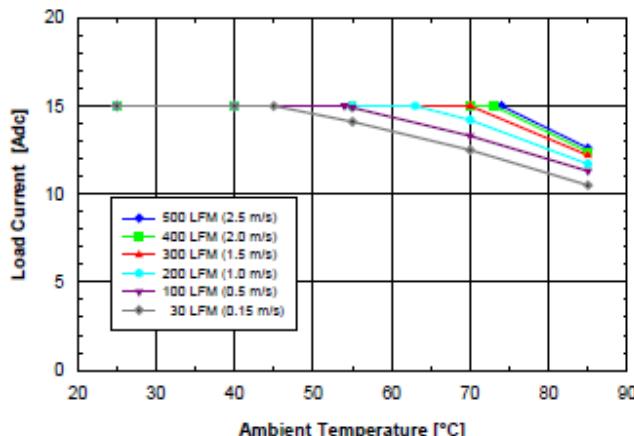


## SQ48 DC-DC Series

**Fig. 3.3V.5:** Efficiency vs. load current and input voltage for SQ48T/S15033 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5m/s) and  $T_a = 25^\circ\text{C}$ .

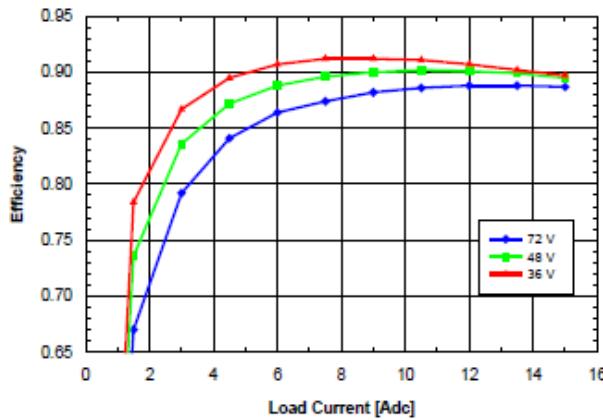


**Fig. 3.3V.6:** Efficiency vs. load current and ambient temperature for SQ48T/S15033 converter mounted vertically with  $V_{in} = 48\text{V}$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0m/s).

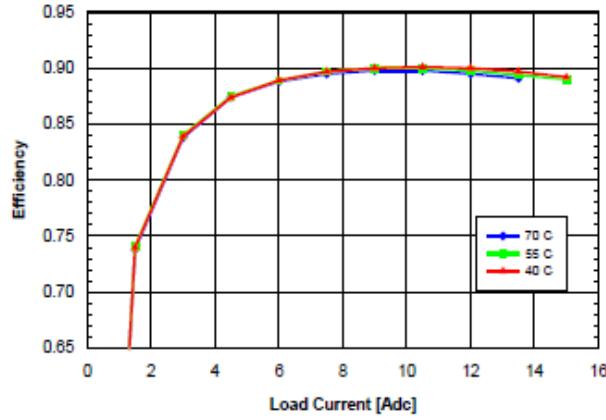


### SQ48T/S15033 (3.3 Volt Out)

**Fig. 3.3V.7:** Power dissipation vs. load current and input voltage for SQ48T/S15033 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ\text{C}$ .

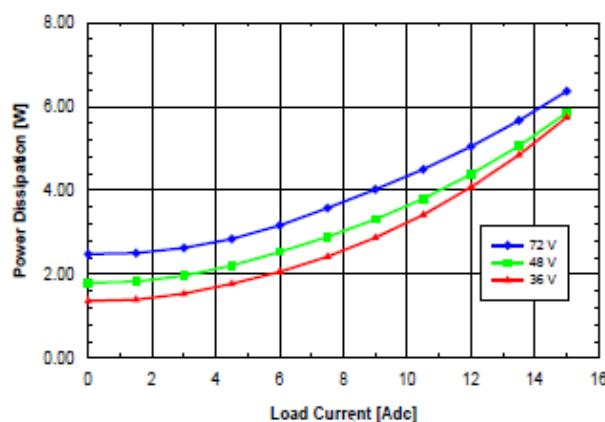


**Fig. 3.3V.8:** Power dissipation vs. load current and ambient temperature for SQ48T/S15033 converter mounted vertically with  $V_{in} = 48\text{V}$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

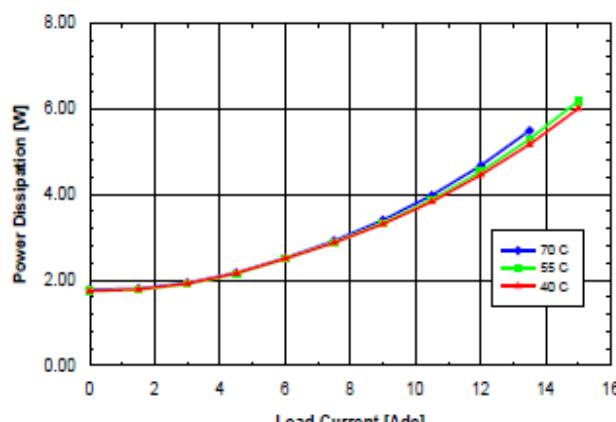


## SQ48 DC-DC Series

**Fig. 3.3V.9:** Turn-on transient at full rated load current (resistive) with no output capacitor at  $V_{in} = 48$  V, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.). Time scale: 2 ms/div.

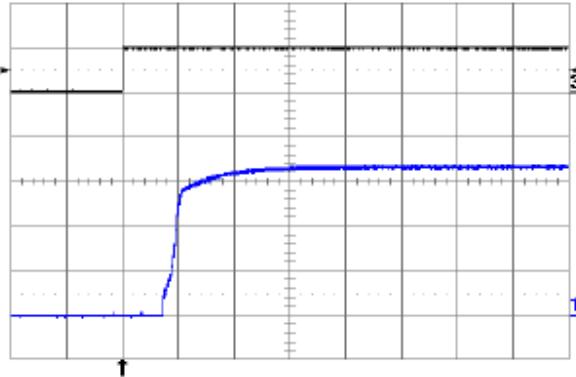

**Fig. 3.3V.10:** Turn-on transient at full rated load current (resistive) plus 10,000  $\mu$ F at  $V_{in} = 48$  V, triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.). Time scale: 2 ms/div.

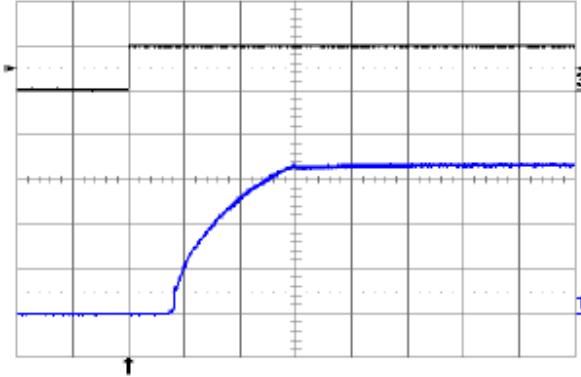


### SQ48T/S15033 (3.3 Volt Out)


**Fig. 3.3V.11:** Output voltage response to load current step-change (3.75 A – 7.5 A – 3.75 A) at  $V_{in} = 48$  V. Top trace: output voltage (100 mV/div.). Bottom trace: load current (5 A/div.). Current slew rate: 0.1 A/ $\mu$ s.  $C_o = 1 \mu$ F ceramic. Time scale: 0.2 ms/div.

**Fig. 3.3V.12:** Output voltage response to load current step-change (3.75 A – 7.5 A – 3.75 A) at  $V_{in} = 48$  V. Top trace: output voltage (100 mV/div.). Bottom trace: load current (5 A/div.). Current slew rate: 5 A/ $\mu$ s.  $C_o = 450 \mu$ F tantalum + 1  $\mu$ F ceramic. Time scale: 0.2 ms/div.


## SQ48 DC-DC Series

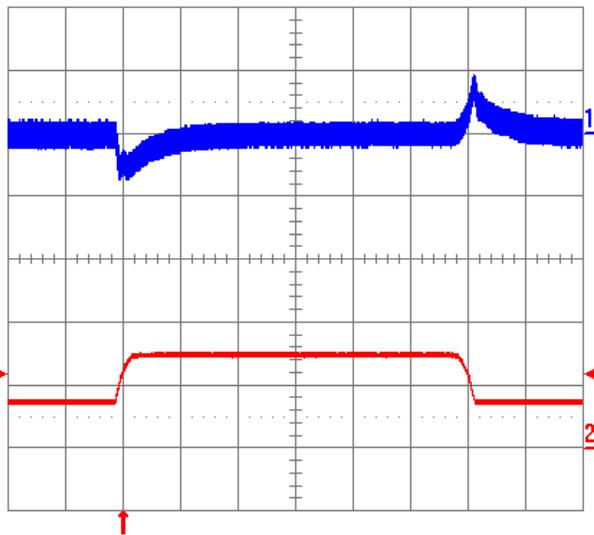

**Fig. 3.3V.13:** Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with  $C_o = 10 \mu F$  tantalum + 1  $\mu F$  ceramic and  $V_{in} = 48 V$ . Time scale: 1  $\mu s$ /div.

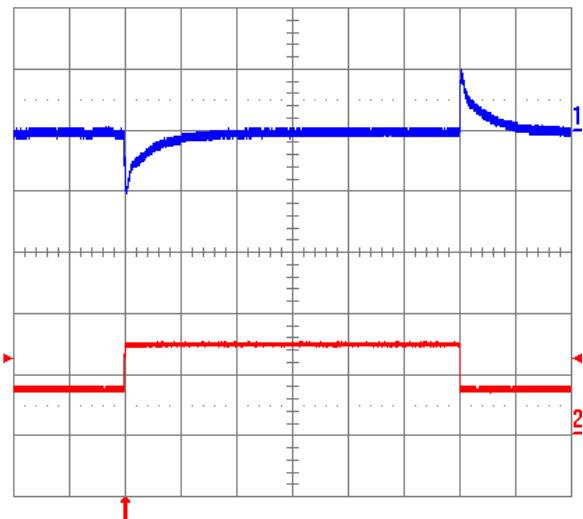


**Fig. 3.3V.14:** Test Setup for measuring input reflected ripple currents,  $i_c$  and  $i_s$

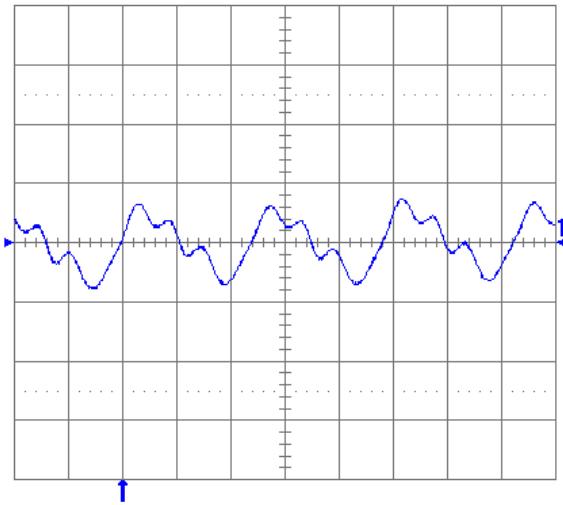


### SQ48T/S15033 (3.3 Volt Out)

**Fig. 3.3V.15:** Input reflected ripple current,  $i_c$  (100 mA/div.), measured at input terminals at full rated load current and  $V_{in} = 48 V$ . Refer to Fig. 3.3V.14 for test setup. Time scale: 1  $\mu s$ /div.


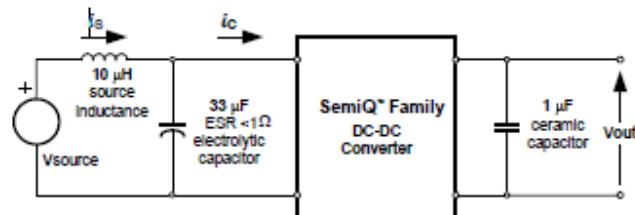


**Fig. 3.3V.16:** Input reflected ripple current,  $i_s$  (10 mA/div.), measured through 10  $\mu H$  at the source at full rated load current and  $V_{in} = 48 V$ . Refer to Fig. 3.3V.14 for test setup. Time scale: 1  $\mu s$ /div.


## SQ48 DC-DC Series

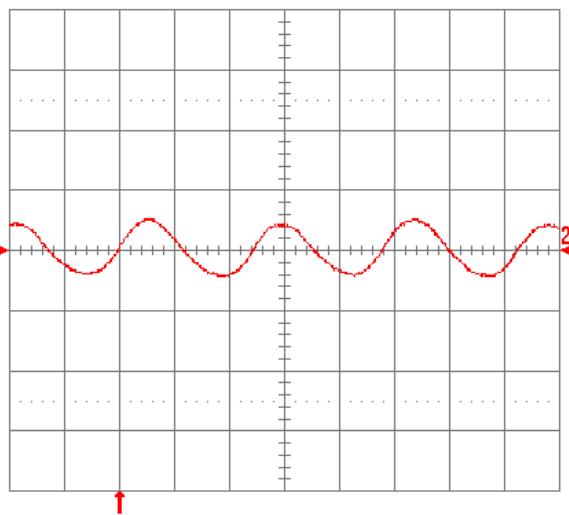

**Fig. 3.3V.17:** Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

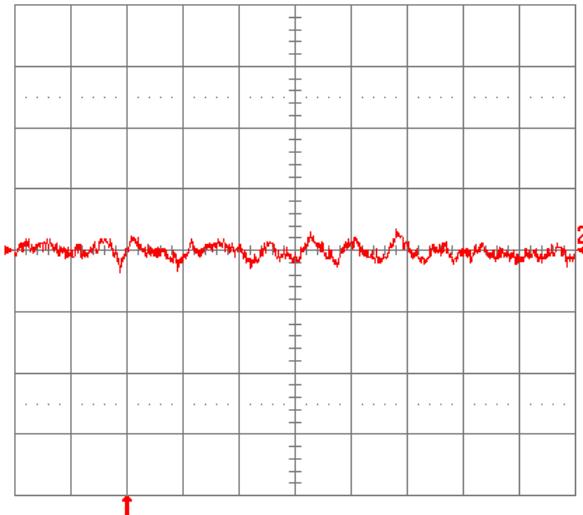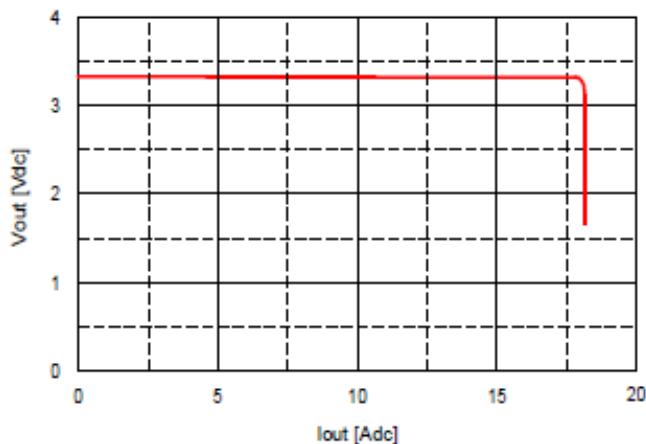

**Fig. 3.3V.18:** Load current (top trace, 20 A/div., 20 ms/div.) into a 10 mΩ short circuit during restart, at Vin = 48 V. Bottom trace (20 A/div., 1 ms/div.) is an expansion of the on-time portion of the top trace.

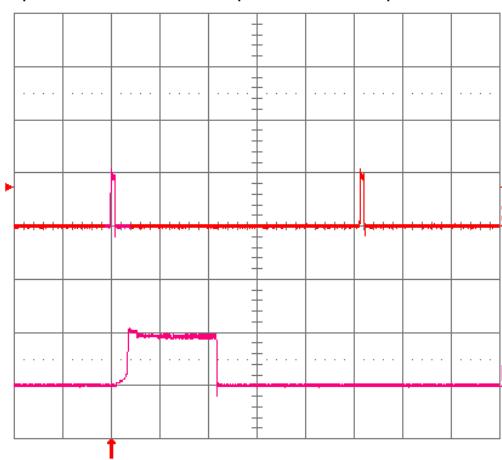

### Electrical Specifications: SQ48T/S15025 (2.5 Volt Out)


Conditions:  $T_A = 25^\circ\text{C}$ , Airflow = 300 LFM (1.5 m/s), Vin = 48 VDC, Vout = 2.5 VDC, unless otherwise specified.

# SQ48 DC-DC Series

Parameter	Notes	Min	Typ	Max	Units
<b>Input Characteristics</b>					
Maximum Input Current	15 ADC, 2.5 VDC Out @ 36 VDC In			1.2	ADC
Input Stand-by Current	Vin = 48V, converter disabled		2.6		mADC
Input No Load Current (0 load on the output)	Vin = 48V, converter enabled		34		mADC
Input Reflected-Ripple Current	25MHz bandwidth		6		mA <sub>PK</sub>
Input Voltage Ripple Rejection	120HZ		TBD		dB
<b>Output Characteristics</b>					
Output Voltage Set Point (no load)		2.475	2.500	2.525	VDC
Output Regulation					
Over Line			±2	±5	mV
Over Load			±2	±5	mV
Output Voltage Range	Over line, load and temperature <sup>1</sup>	2.462		2.538	VDC
Output Ripple and Noise - 25 MHz bandwidth	Full load + 10 µF tantalum + 1 µF ceramic		30	50	mV <sub>PK</sub>
External Load Capacitance	Plus full load (resistive)			15,000	µF
Output Current Range		0		15	ADC
Current Limit Inception	Non-latching	15.75	18	20	ADC
Peak Short-Circuit Current	Non-latching, Short =10 mΩ.		30	40	A
RMS Short-Circuit Current	Non-latching			5.3	Arms
<b>Dynamic Response</b>					
Load Change 25% of Iout Max, di/dt = 0.1 A/µs	Co = 1 µF ceramic		120		mV
di/dt = 5 A/µs	Co = 450 µF tantalum + 1 µF ceramic		120		mV
Settling Time to 1%		100			µs
<b>Efficiency</b>					
100% Load			87.0		%
50% Load			87.5		%

1-40 °C to 85 °C.


**Fig. 2.5V.1:** Available load current vs. ambient air temperature and airflow rates for SQ48T15025 converter with D height pins mounted vertically with Vin = 48 V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

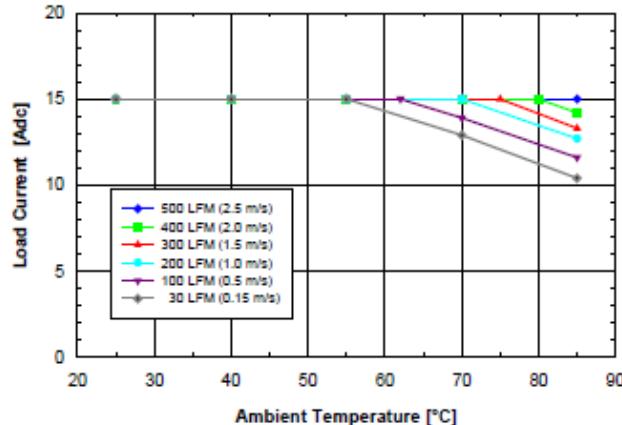

## SQ48T/S15025 (2.5 Volt Out)

**Fig. 2.5V.3:** Available load current vs. ambient air temperature and airflow rates for SQ48S15025 converter

**Fig. 2.5V.2:** Available load current vs. ambient air temperature and airflow rates for SQ48T15025 converter with D height pins mounted horizontally with Vin = 48 V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

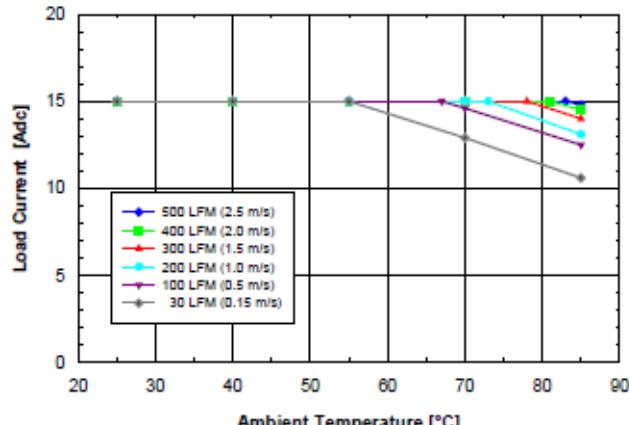

**Fig. 2.5V.4:** Available load current vs. ambient air temperature and airflow rates for SQ48S15025 converter


866.513.2839

tech.support@psbel.com

belpowersolutions.com


## SQ48 DC-DC Series

mounted vertically with  $V_{in} = 48$  V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

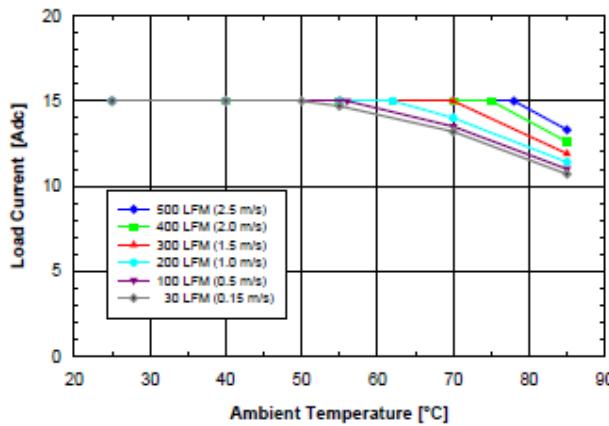


**Fig. 2.5V.5:** Efficiency vs. load current and input voltage for SQ48T/S15025 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25$  °C.

mounted horizontally with  $V_{in} = 48$  V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

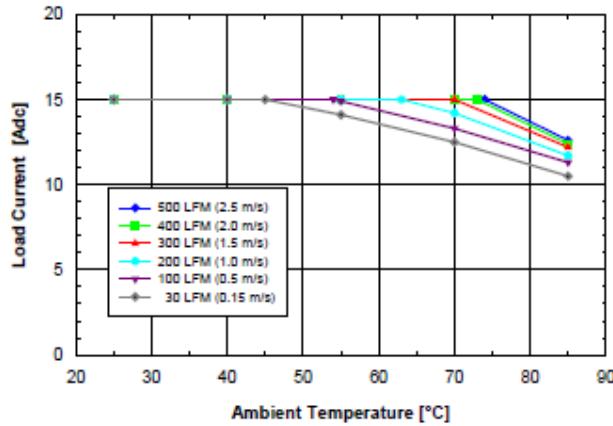


**Fig. 2.5V.6:** Efficiency vs. load current and ambient temperature for SQ48T/S15025 converter mounted vertically with  $V_{in} = 48$  V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

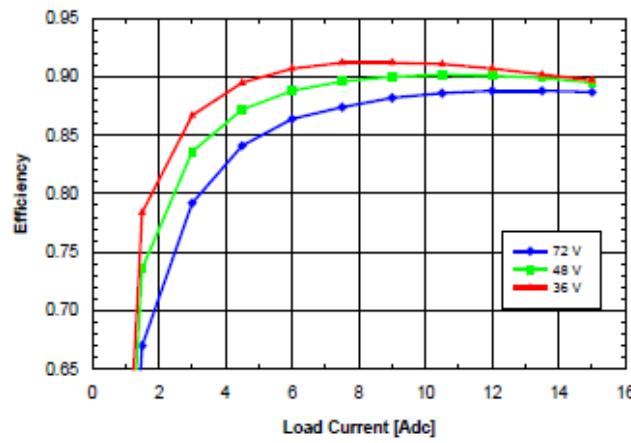

### SQ48T/S15025 (2.5 Volt Out)

**Fig. 2.5V.7:** Power dissipation vs. load current and input voltage for SQ48T/S15025 converter mounted

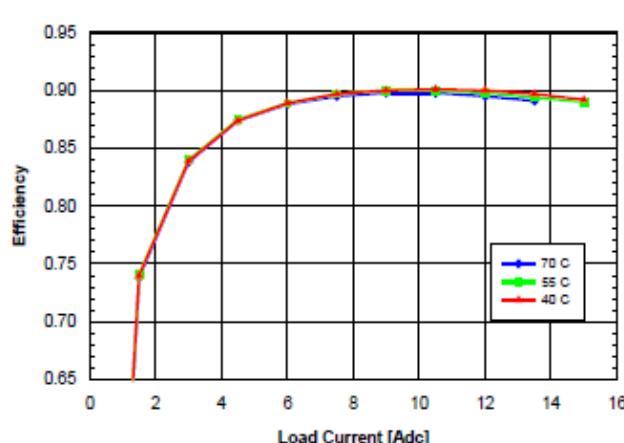

**Fig. 2.5V.8:** Power dissipation vs. load current and ambient temperature for SQ48T/S15025 converter


866.513.2839

tech.support@psbel.com


belpowersolutions.com

## SQ48 DC-DC Series

vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ\text{C}$ .

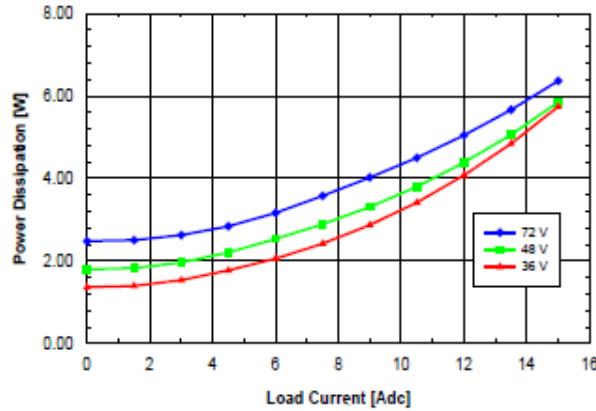


**Fig. 2.5V.9:** Turn-on transient at full rated load current (resistive) with no output capacitor at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.). Time scale: 2 ms/div.

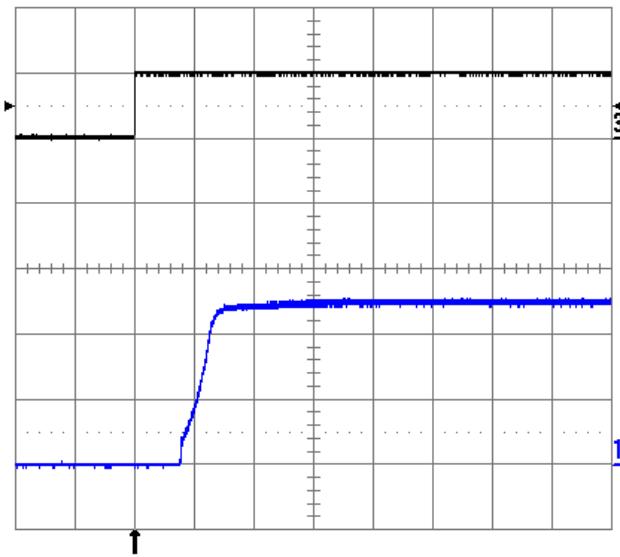


### SQ48T/S15025 (2.5 Volt Out)

**Fig. 2.5V.11:** Output voltage response to load current step-change (3.75 A – 7.5 A – 3.75 A) at  $V_{in} = 48\text{ V}$ .

mounted vertically with  $V_{in} = 48\text{ V}$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

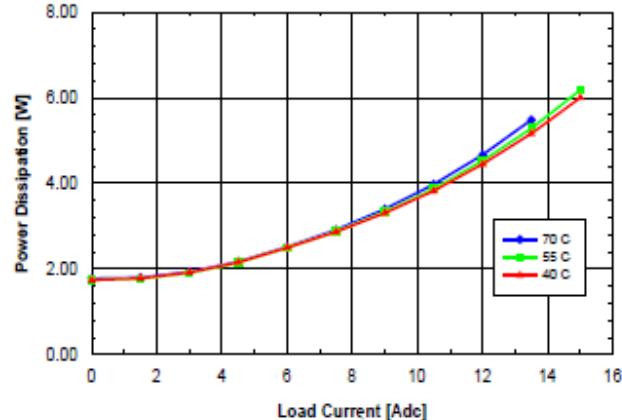


**Fig. 2.5V.10:** Turn-on transient at full rated load current (resistive) plus 10,000  $\mu\text{F}$  at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.). Time scale: 2 ms/div.

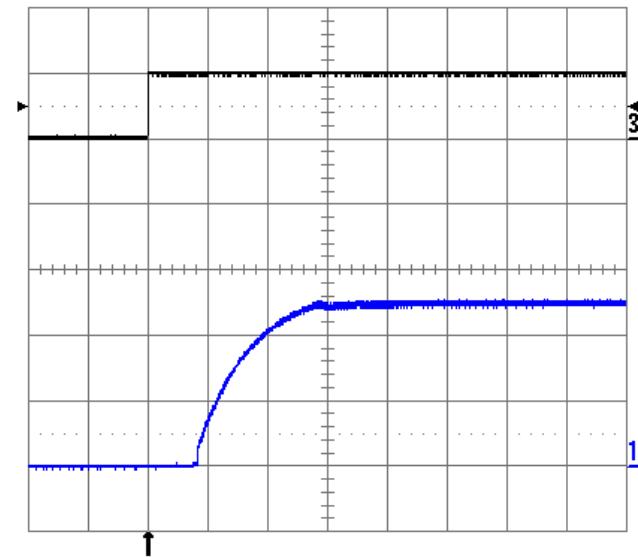

**Fig. 2.5V.12:** Output voltage response to load current step-change (3.75 A – 7.5 A – 3.75 A) at  $V_{in} = 48\text{ V}$ .


## SQ48 DC-DC Series

Top trace: output voltage (100 mV/div.). Bottom trace: load current (5 A/div.). Current slew rate: 0.1 A/ $\mu$ s  
 $C_o = 1 \mu$ F ceramic. Time scale: 0.2 ms/div.

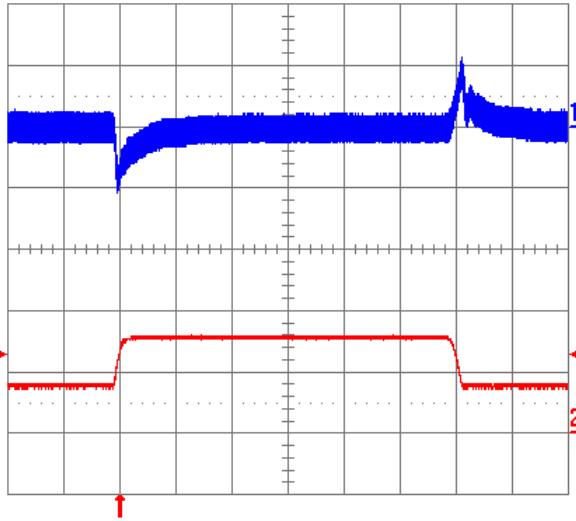


**Fig. 2.5V.13:** Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with  $C_o = 10 \mu$ F tantalum + 1  $\mu$ F ceramic and  $V_{in} = 48$  V. Time scale: 1  $\mu$ s/div.

Top trace: output voltage (100 mV/div.). Bottom trace: load current (5 A/div.). Current slew rate: 5 A/ $\mu$ s.  $C_o = 450 \mu$ F tantalum + 1  $\mu$ F ceramic. Time scale: 0.2 ms/div.

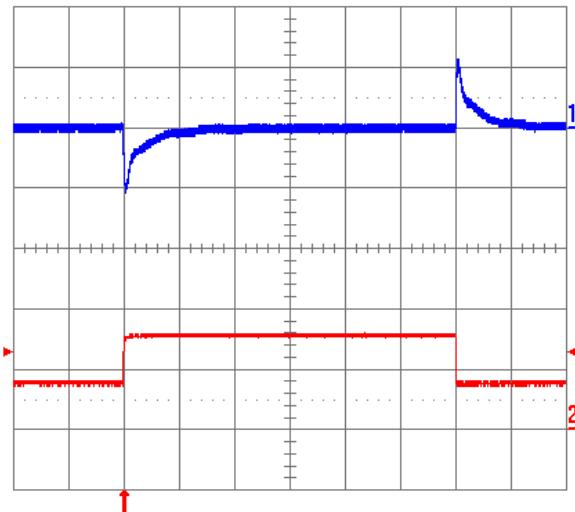


**Fig. 2.5V.14:** Test Setup for measuring input reflected ripple currents,  $i_c$  and  $i_s$

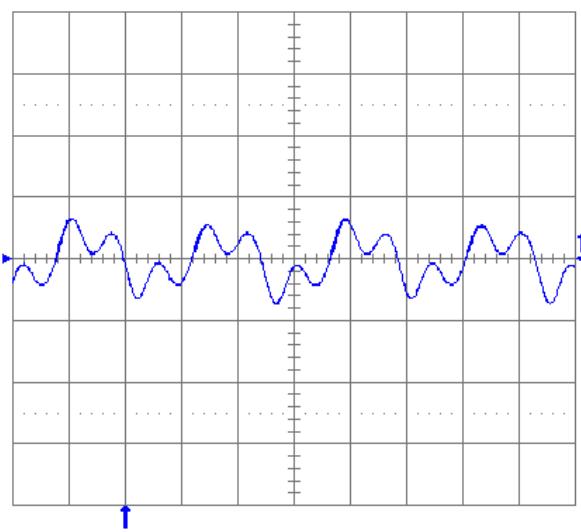

### SQ48T/S15025 (2.5 Volt Out)

**Fig. 2.5V.15:** Input reflected ripple current,  $i_s$  (100 mA/div.), measured at input terminals at full rated

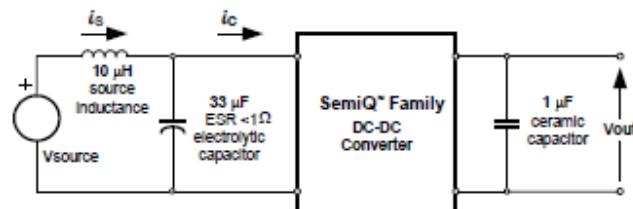

**Fig. 2.5V.16:** Input reflected ripple current,  $i_s$  (10 mA/div.), measured through 10  $\mu$ H at the source at


866.513.2839

tech.support@psbel.com


belpowersolutions.com

## SQ48 DC-DC Series


load current and Vin = 48 V. Refer to Fig. 2.5V.14 for test setup. Time scale: 1  $\mu$ s/div.

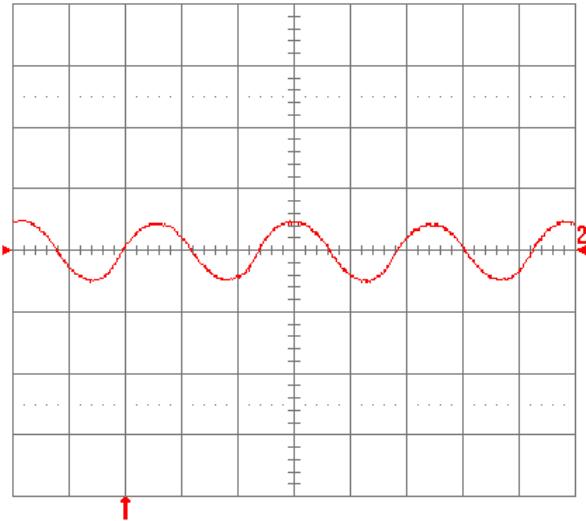


**Fig. 2.5V.17:** Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

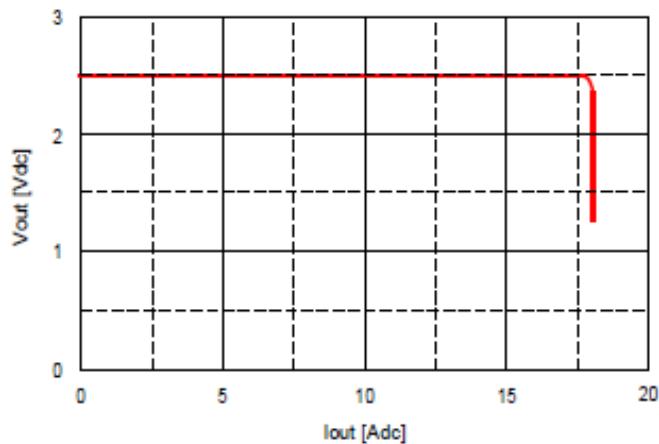

full rated load current and Vin = 48 V. Refer to Fig. 2.5V.14 for test setup. Time scale: 1  $\mu$ s/div.

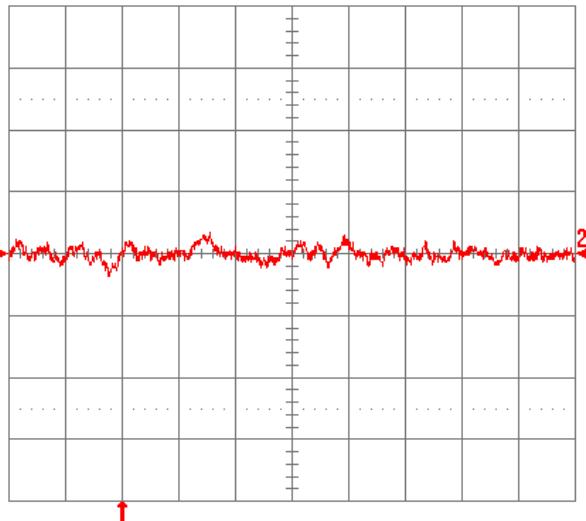

**Fig. 2.5V.18:** Load current (top trace, 20 A/div., 20 ms/div.) into a 10 m $\Omega$  short circuit during restart, at Vin = 48 V. Bottom trace (20 A/div., 1 ms/div.) is an expansion of the on-time portion of the top trace.

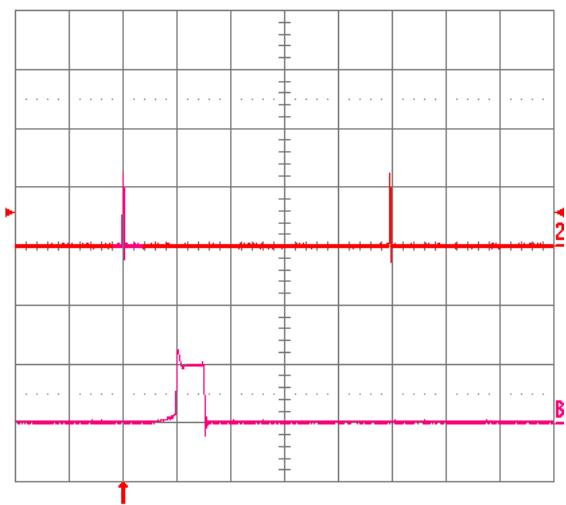

## Electrical Specifications: SQ48T/S15020 (2.0 Volt Out)

866.513.2839

tech.support@psbel.com

belpowersolutions.com


## SQ48 DC-DC Series

Conditions:  $T_A = 25^\circ\text{C}$ , Airflow = 300 LFM (1.5 m/s),  $V_{in} = 48\text{ VDC}$ ,  $V_{out} = 2.0\text{ VDC}$ , unless otherwise specified.

Parameter	Notes	Min	Typ	Max	Units
<b>Input Characteristics</b>					
Maximum Input Current	15 ADC, 2.0 VDC Out @ 36 VDC In			1.0	ADC
Input Stand-by Current	$V_{in} = 48\text{V}$ , converter disabled		3		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{V}$ , converter enabled		31		mADC
Input Reflected-Ripple Current	25MHz bandwidth		6		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120HZ		TBD		dB
<b>Output Characteristics</b>					
Output Voltage Set Point (no load)		1.98	2.000	2.02	VDC
Output Regulation					
Over Line			$\pm 2$	$\pm 5$	mV
Over Load			$\pm 2$	$\pm 5$	mV
Output Voltage Range	Over line, load and temperature <sup>1</sup>	1.970		2.030	VDC
Output Ripple and Noise - 25 MHz bandwidth	Full load + 10 $\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic	30	50		$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			15,000	$\mu\text{F}$
Output Current Range		0		15	ADC
Current Limit Inception	Non-latching	15.75	18	20	ADC
Peak Short-Circuit Current	Non-latching, Short = 10 $\text{m}\Omega$ .	30	40		A
RMS Short-Circuit Current	Non-latching			5.3	Arms
<b>Dynamic Response</b>					
Load Change 25% of $I_{out}$ Max, $di/dt = 0.1\text{ A}/\mu\text{s}$	$C_o = 1\text{ }\mu\text{F}$ ceramic	80			mV
$di/dt = 5\text{ A}/\mu\text{s}$	$C_o = 450\text{ }\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic	60			mV
Settling Time to 1%		60			$\mu\text{s}$
<b>Efficiency</b>					
100% Load		86.5			%
50% Load		87.0			%


<sup>1</sup>40 °C to 85 °C.

**Fig. 2.0V.1:** Available load current vs. ambient air temperature and airflow rates for SQ48T15020 converter with D height pins mounted vertically with  $V_{in} = 48\text{ V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

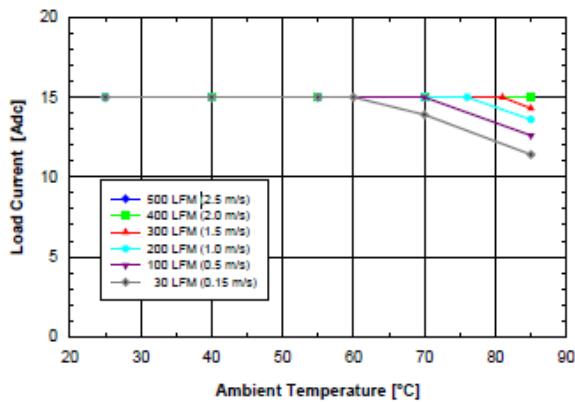

### SQ48T/S15020 (2.0 Volt Out)


**Fig. 2.0V.3:** Available load current vs. ambient air

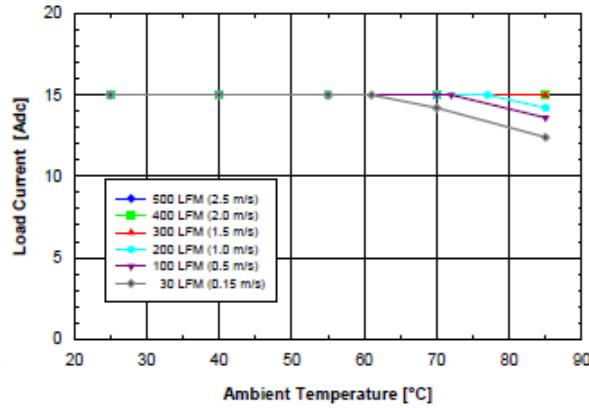

**Fig. 2.0V.4:** Available load current vs. ambient air


## SQ48 DC-DC Series

temperature and airflow rates for SQ48S15020 converter mounted vertically with  $V_{in} = 48$  V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

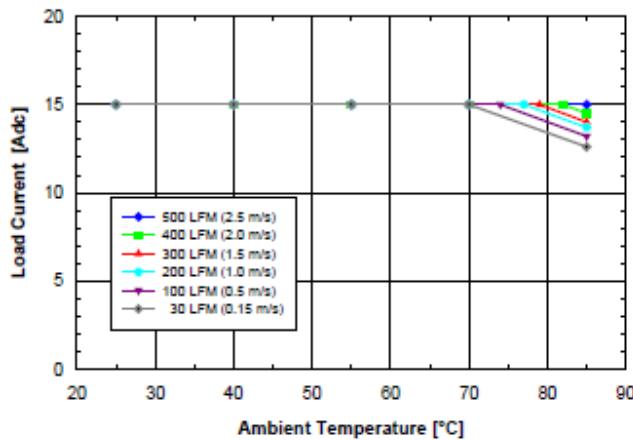


**Fig. 2.0V.5:** Efficiency vs. load current and input voltage for SQ48T/S15020 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25$  °C.

temperature and airflow rates for SQ48S15020 converter mounted horizontally with  $V_{in} = 48$  V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

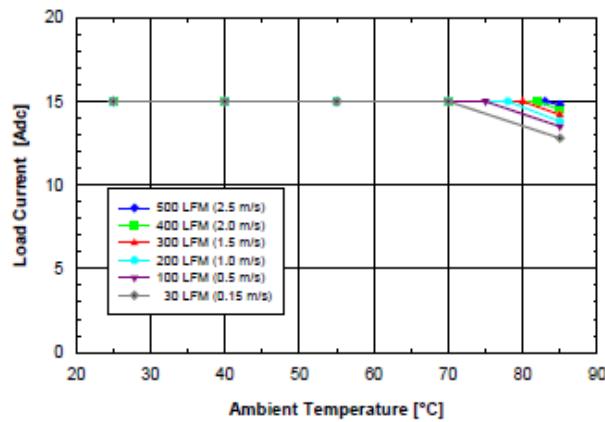


**Fig. 2.0V.6:** Efficiency vs. load current and ambient for SQ48T/S15020 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

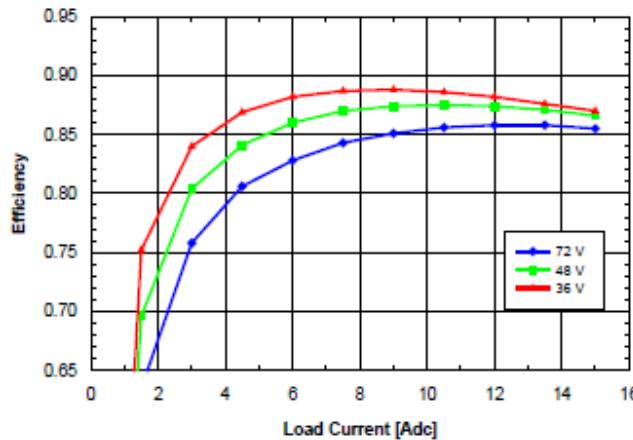

### SQ48T/S15020 (2.0 Volt Out)


**Fig. 2.0V.7:** Power dissipation vs. load current and

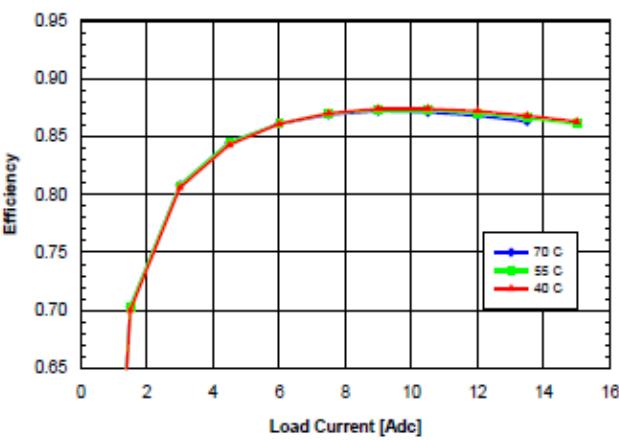


**Fig. 2.0V.8:** Power dissipation vs. load current and

## SQ48 DC-DC Series


input voltage for SQ48T/S15020 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ\text{C}$ .

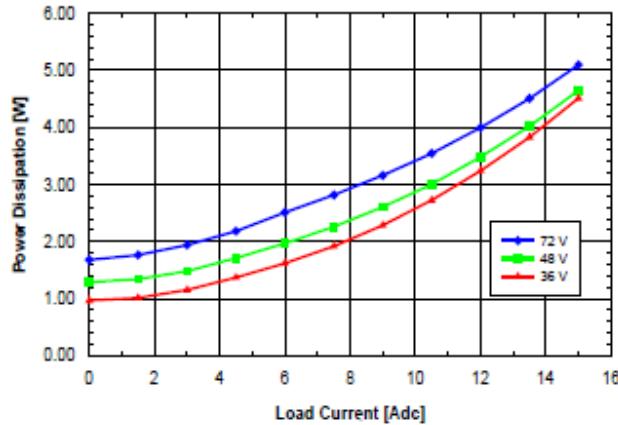


ambient temperature for SQ48T/S15020 converter mounted vertically with  $V_{in} = 48\text{ V}$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

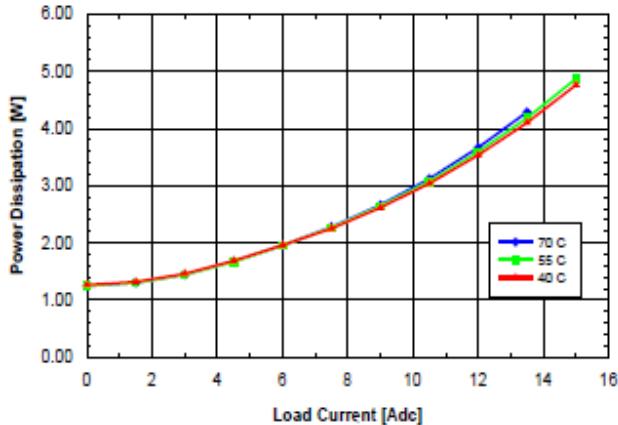

**Fig. 2.0V.9:** Turn-on transient at full rated load current (resistive) with no output capacitor at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.). Time scale: 2 ms/div.

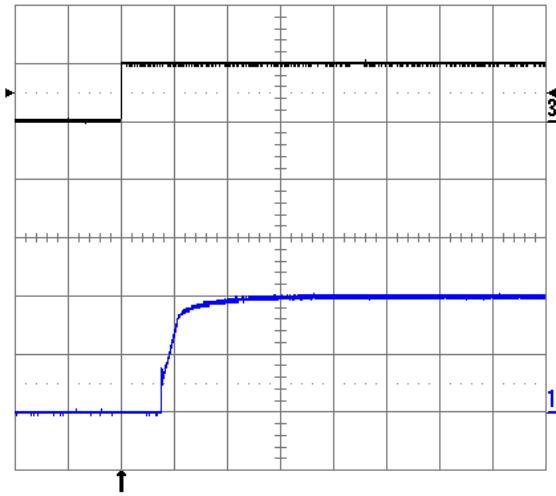

**Fig. 2.0V.9:** Turn-on transient at full rated load current current (resistive) plus 10,000  $\mu\text{F}$  at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.). Time scale: 2 ms/div.

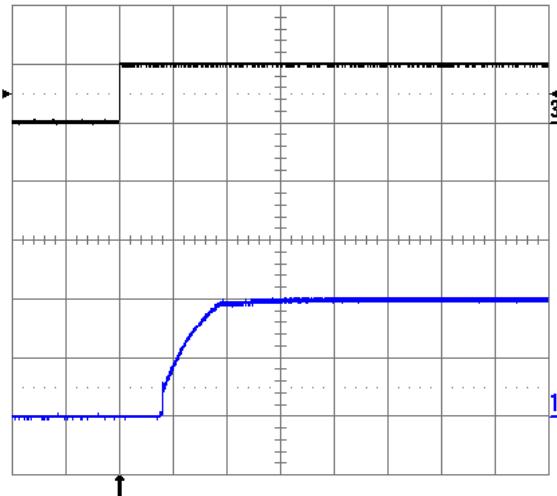


### SQ48T/S15020 (2.0 Volt Out)

**Fig. 2.0V.11:** Output voltage response to load current


**Fig. 2.0V.12:** Output voltage response to load current

## SQ48 DC-DC Series

step-change (3.75 A – 7.5 A – 3.75 A) at Vin = 48 V.  
Top trace: output voltage (100 mV/div.). Bottom trace:  
load current (5 A/div.). Current slew rate: 0.1 A/μs.  
Co = 1 μF ceramic. Time scale: 0.2 ms/div.

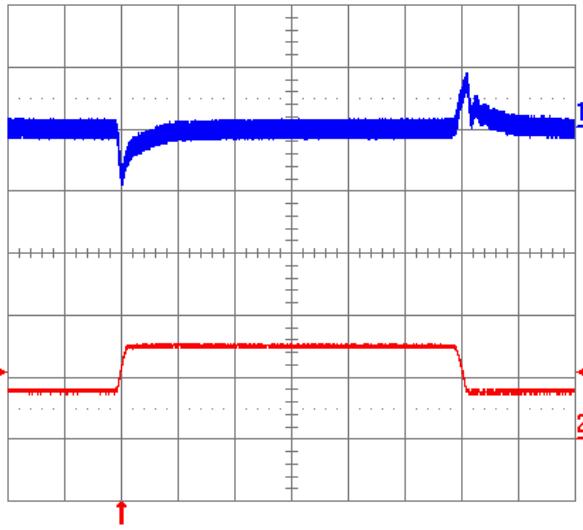


**Fig. 2.0V.13:** Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with  $Co = 10 \mu\text{F}$  tantalum + 1  $\mu\text{F}$  ceramic and  $Vin = 48 \text{ V}$ . Time scale: 1  $\mu\text{s}/\text{div}$ .

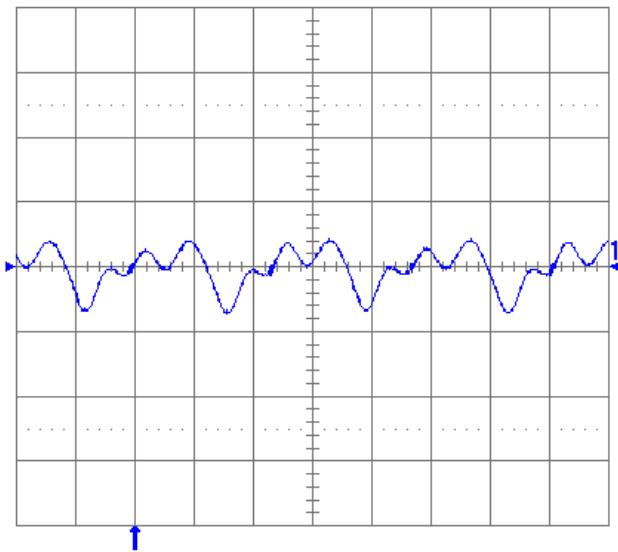


### SQ48T/S15020 (2.0 Volt Out)

**Fig. 2.0V.15:** Input reflected ripple current,  $i_s$

step-change (3.75 A – 7.5 A – 3.75 A) at Vin = 48 V.  
Top trace: output voltage (100 mV/div.). Bottom trace:  
load current (5 A/div.). Current slew rate: 5 A/μs.  $Co = 450 \mu\text{F}$  tantalum + 1  $\mu\text{F}$  ceramic. Time scale: 0.2 ms/div.

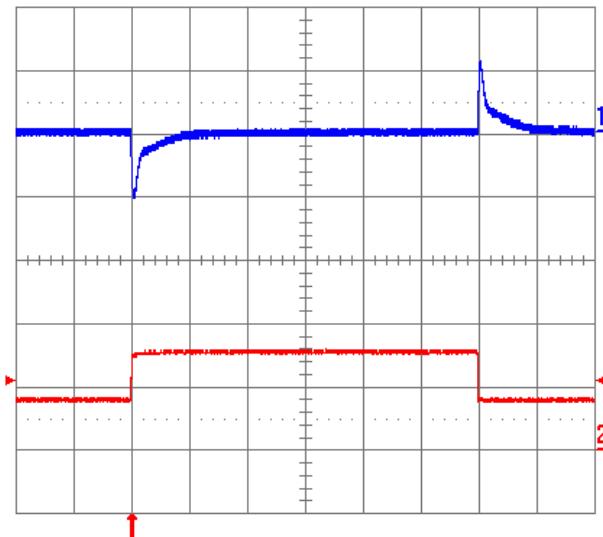


**Fig. 2.0V.13:** Output voltage ripple (20 mV/div.) at full ripple currents,  $i_c$  and  $i_s$

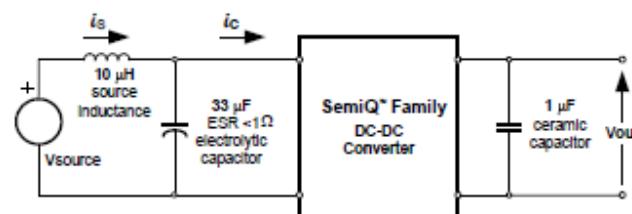


## SQ48 DC-DC Series

(100 mA/div.), measured at input terminals at full rated load current and Vin = 48 V. Refer to Fig. 2.0V.14 for test setup. Time scale: 1  $\mu$ s/div.


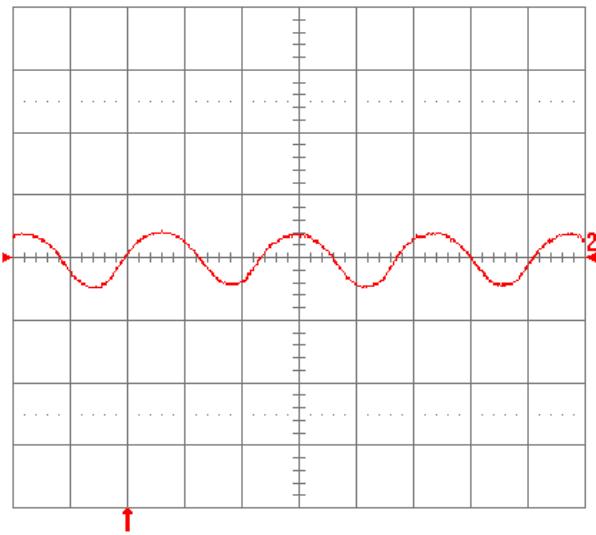


**Fig. 2.0V.17:** Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

(10 mA/div.), measured through 10  $\mu$ H at the source at full rated load current and Vin = 48 V. Refer to test setup. Time scale: 1  $\mu$ s/div.

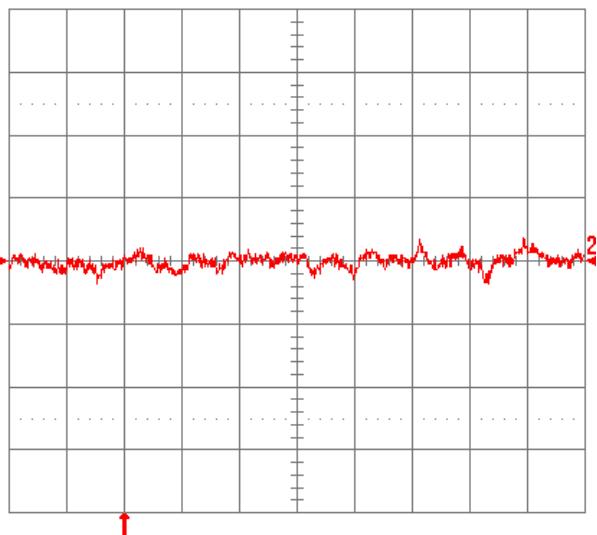

**Fig. 2.0V.18:** Load current (top trace, 20 A/div., 20 ms/div.) into a 10 m $\Omega$  short circuit during restart, at Vin = 48 V. Bottom trace (20 A/div., 1 ms/div.) is an expansion of the on-time portion of the top trace.

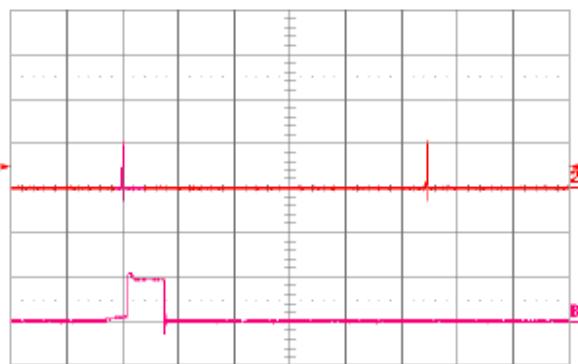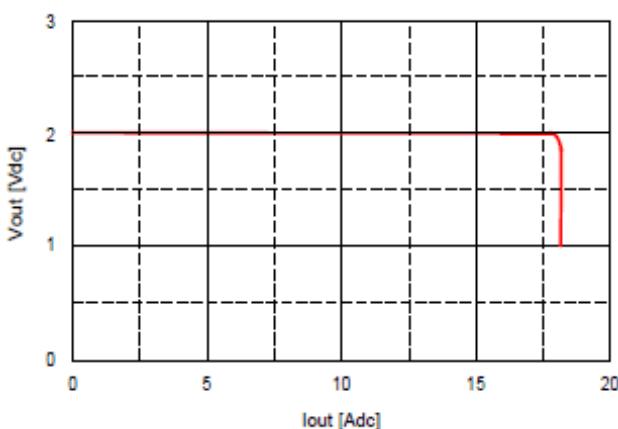

# SQ48 DC-DC Series


## Electrical Specifications: SQ48T/S15018 (1.8 Volt Out)

Conditions:  $T_A = 25^\circ\text{C}$ , Airflow = 300 LFM (1.5 m/s),  $V_{in} = 48\text{ VDC}$ ,  $V_{out} = 1.8\text{ VDC}$ , unless otherwise specified.


Parameter	Notes	Min	Typ	Max	Units
<b>Input Characteristics</b>					
Maximum Input Current	15 ADC, 1.8 VDC Out @ 36 VDC In			0.9	ADC
Input Stand-by Current	$V_{in} = 48\text{V}$ , converter disabled		2.6		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{V}$ , converter enabled		29		mADC
Input Reflected-Ripple Current	25MHz bandwidth		6		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120HZ		TBD		dB
<b>Output Characteristics</b>					
Output Voltage Set Point (no load)		1.782	1.800	1.818	VDC
Output Regulation			$\pm 2$	$\pm 4$	mV
Over Line			$\pm 2$	$\pm 5$	mV
Over Load					
Output Voltage Range	Over line, load and temperature <sup>1</sup>	1.773		1.827	VDC
Output Ripple and Noise - 25 MHz bandwidth	Full load + 10 $\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic		30	50	$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			15,000	$\mu\text{F}$
Output Current Range		0		15	ADC
Current Limit Inception	Non-latching	15.75	18	20	ADC
Peak Short-Circuit Current	Non-latching, Short =10 m $\Omega$ .		30	40	A
RMS Short-Circuit Current	Non-latching			5.3	Arms
<b>Dynamic Response</b>					
Load Change 25% of $I_{out}$ Max, $di/dt = 0.1\text{ A}/\mu\text{s}$	$C_o = 1\text{ }\mu\text{F}$ ceramic		80		mV
$di/dt = 5\text{ A}/\mu\text{s}$	$C_o = 450\text{ }\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic		100		mV
Settling Time to 1%			100		$\mu\text{s}$
<b>Efficiency</b>					
100% Load			85.5		%
50% Load			86.0		%

<sup>1</sup>20 °C to 85 °C.

**Fig. 1.8V.1:** Available load current vs. ambient air temperature and airflow rates for SQ48T15018 converter with D height pins mounted vertically with  $V_{in} = 48\text{ V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

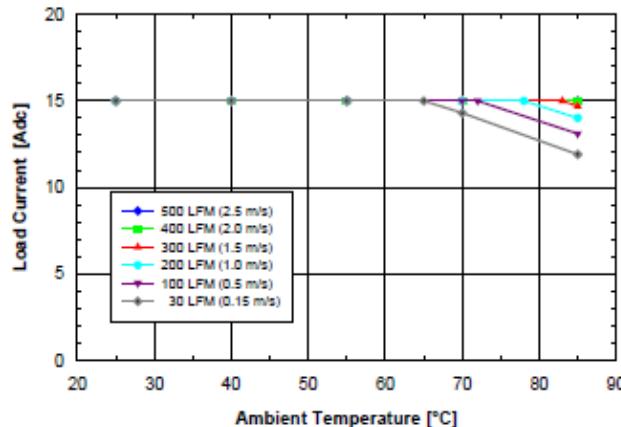

**Fig. 1.8V.2:** Available load current vs. ambient air temperature and airflow rates for SQ48T15018 converter with D height pins mounted horizontally with  $V_{in} = 48\text{ V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

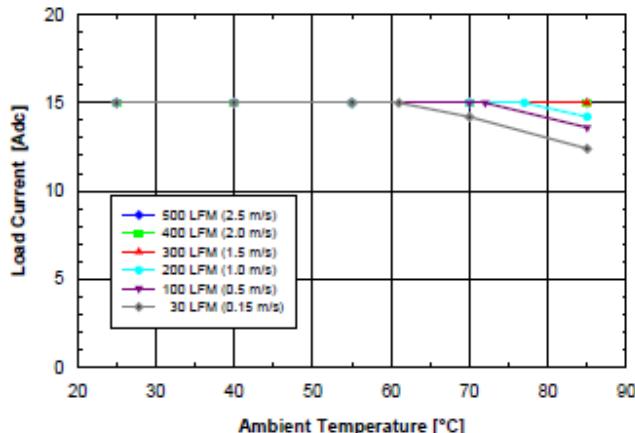

866.513.2839


tech.support@psbel.com

belpowersolutions.com


## SQ48 DC-DC Series

### SQ48T/S15018 (1.8 Volt Out)


**Fig. 1.8V.3:** Available load current vs. ambient air temperature and airflow rates for SQ48S15018 converter mounted vertically with  $V_{in} = 48$  V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

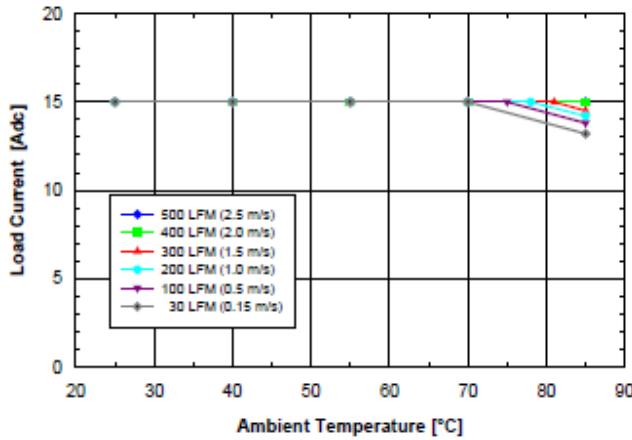


**Fig. 1.8V.5:** Efficiency vs. load current and input voltage for SQ48T/S15018 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25$  °C.

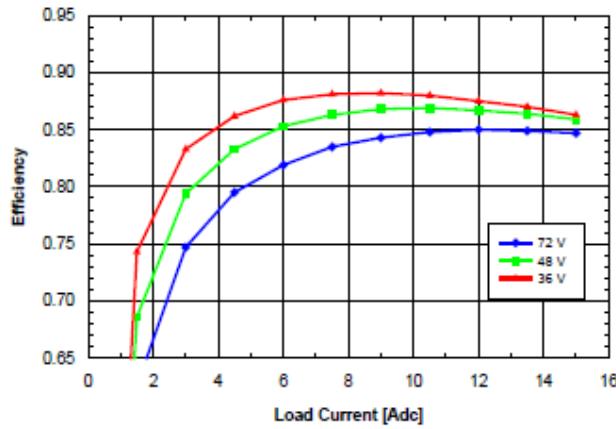

**Fig. 1.8V.4:** Available load current vs. ambient air temperature and airflow rates for SQ48S15018 converter mounted horizontally with  $V_{in} = 48$  V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

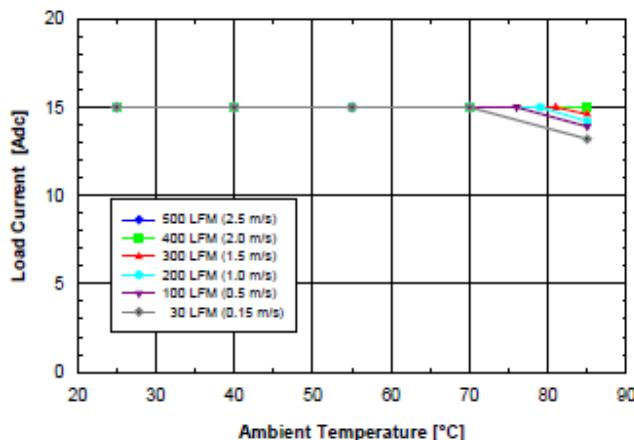


**Fig. 1.8V.6:** Efficiency vs. load current and ambient temperature for SQ48T/S15018 converter mounted vertically with  $V_{in} = 48$  V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

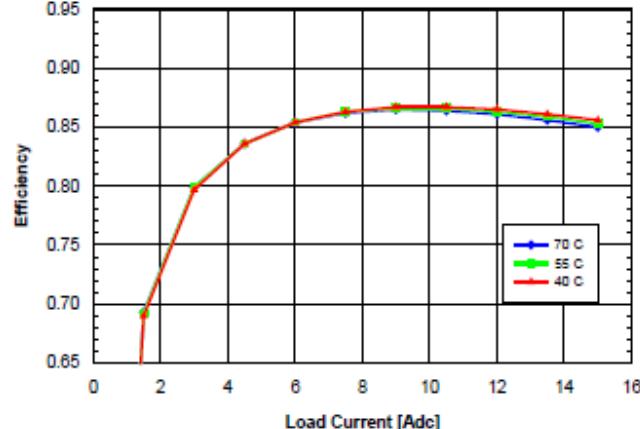


## SQ48 DC-DC Series

### SQ48T/S15018 (1.8 Volt Out)


**Fig. 1.8V.7:** Power dissipation vs. load current and input voltage for SQ48T/S15018 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ\text{C}$ .

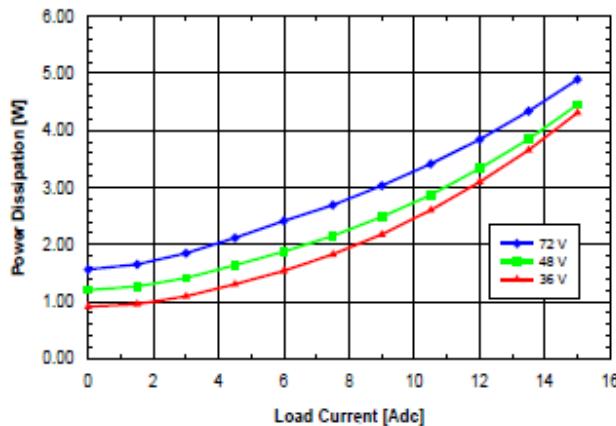


**Fig. 1.8V.8:** Power dissipation vs. load current and ambient temperature for SQ48T/S15018 converter vertically with air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

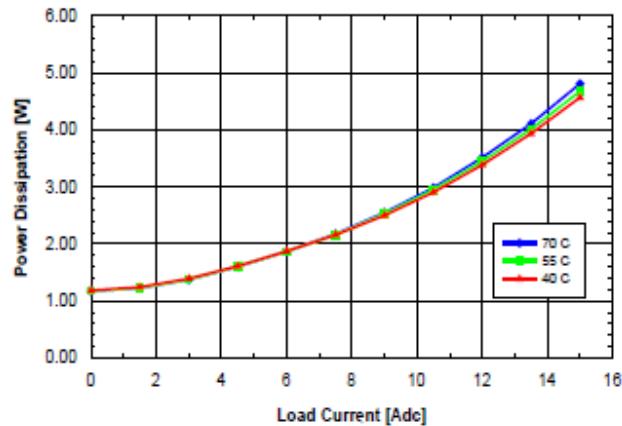

**Fig. 1.8V.9:** Turn-on transient at full rated load current (resistive) with no output capacitor at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.). Time scale: 2 ms/div.

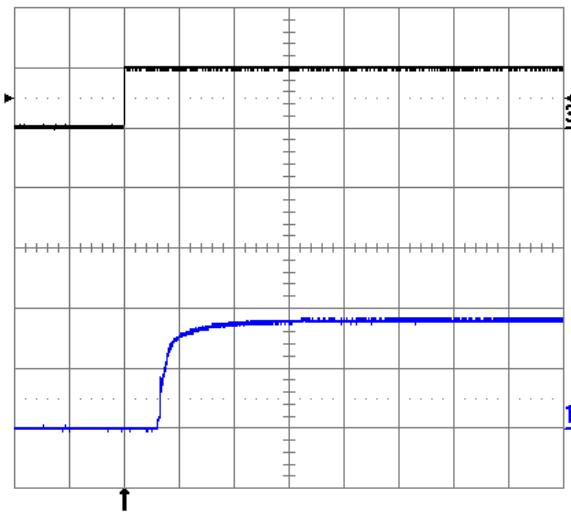

**Fig. 1.8V.10:** Turn-on transient at full rated load current (resistive) plus 10,000  $\mu\text{F}$  at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (1 V/div.). Time scale: 2 ms/div.

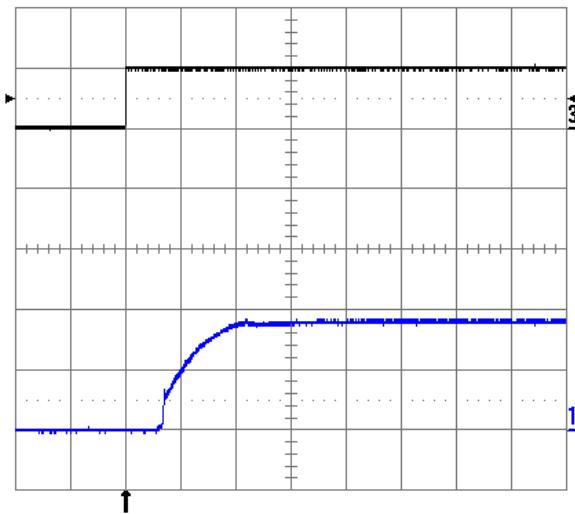

866.513.2839


tech.support@psbel.com

belpowersolutions.com


## SQ48 DC-DC Series

### SQ48T/S15018 (1.8 Volt Out)


**Fig. 1.8V.11:** Output voltage response to load current step-change (3.75 A – 7.5 A – 3.75 A) at Vin = 48 V. Top trace: output voltage (100 mV/div.). Bottom trace: load current (5 A/div.). Current slew rate: 0.1 A/μs. Co = 1 μF ceramic. Time scale: 0.2 ms/div.

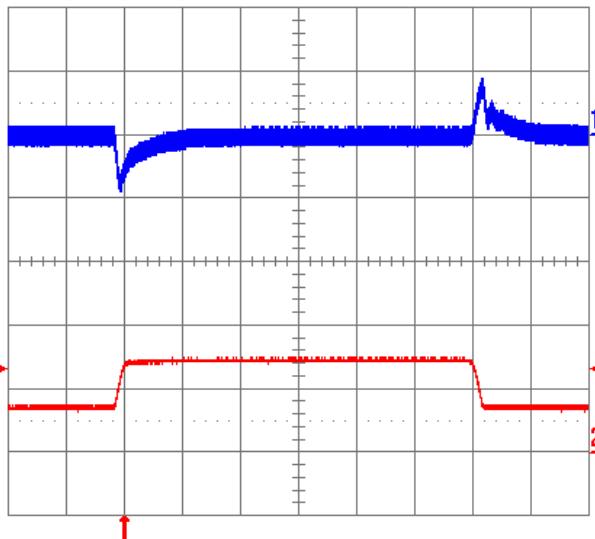


**Fig. 1.8V.13:** Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with Co = 10 μF tantalum + 1 μF ceramic and Vin = 48 V. Time scale: 1 μs/div.

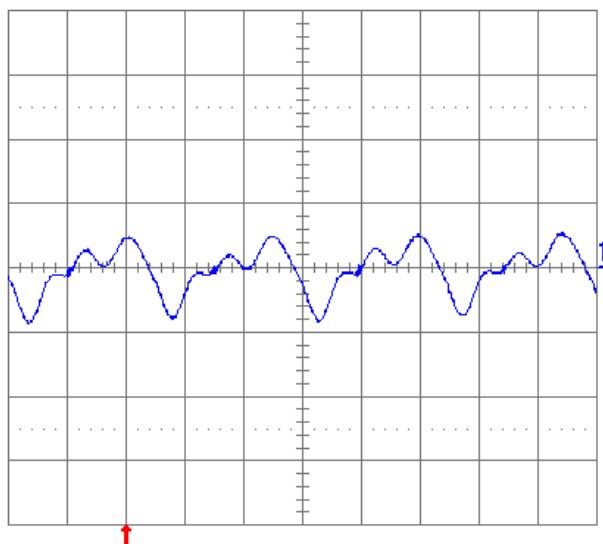

**Fig. 1.8V.12:** Output voltage response to load current step-change (3.75 A – 7.5 A – 3.75 A) at Vin = 48 V. Top trace: output voltage (100 mV/div.). Bottom trace: load current (5 A/div.). Current slew rate: 5 A/μs. Co = 450 μF tantalum + 1 μF ceramic. Time scale: 0.2 ms/div.

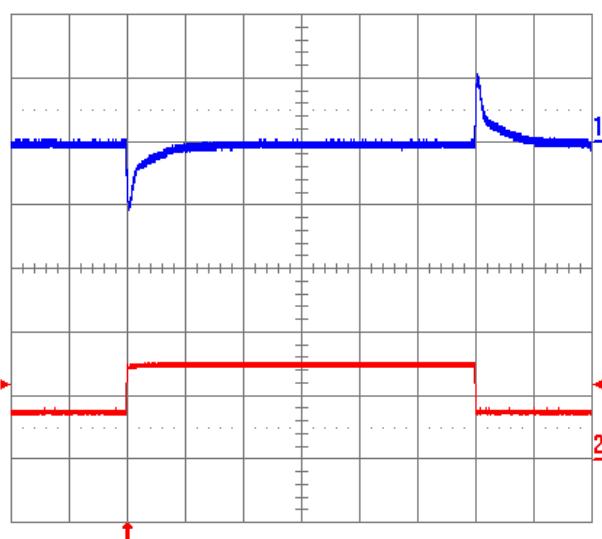


**Fig. 1.8V.14:** Test Setup for measuring input reflected ripple currents,  $i_s$  and  $i_c$

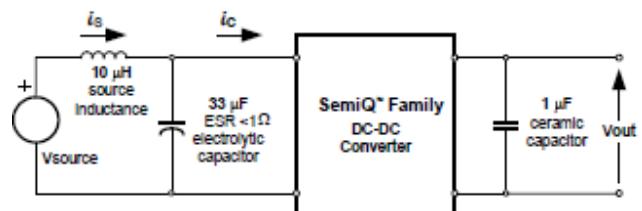


## SQ48 DC-DC Series

### SQ48T/S15018 (1.8 Volt Out)


**Fig. 1.8V.15:** Input reflected ripple current,  $i_s$  (100 mA/div.), measured at input terminals at full rated load current and  $V_{in} = 48$  V. Refer to Fig. 1.8V.14 for test setup. Time scale: 1  $\mu$ s/div.

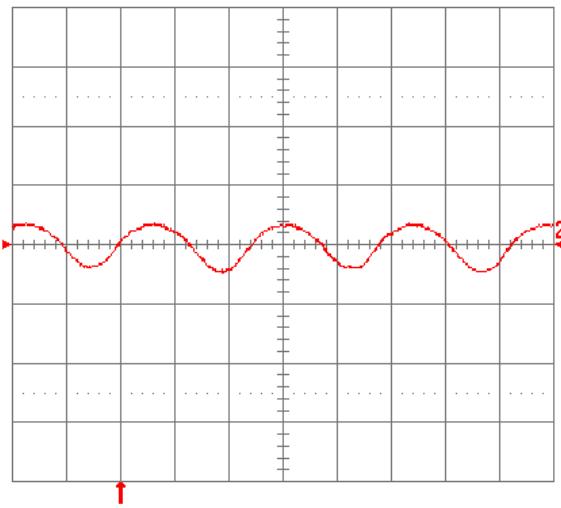


**Fig. 1.8V.17:** Output voltage vs. load current showing voltage has almost no effect on current limit characteristic.

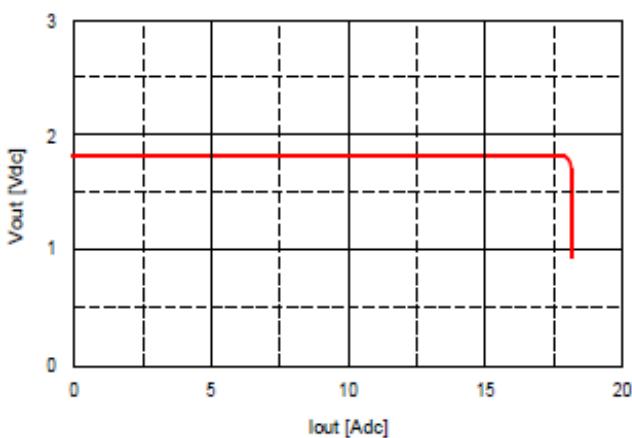

**Fig. 1.8V.16:** Input reflected ripple current,  $i_s$  (10 mA/div.), measured through 10  $\mu$ H at the source at full rated load current and  $V_{in} = 48$  V. Refer to Fig. 1.8V.14 for test setup. Time scale: 1  $\mu$ s/div.

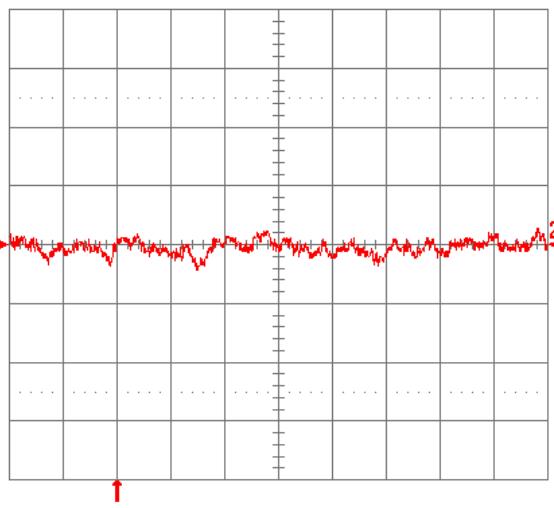

**Fig. 1.8V.18:** Load current (top trace, 20 A/div., 20 ms/div.) into a 10 m $\Omega$  short circuit during restart, at  $V_{in} = 48$  V. Bottom trace (20 A/div., 1 ms/div.) is an expansion of the on-time portion of the top trace.

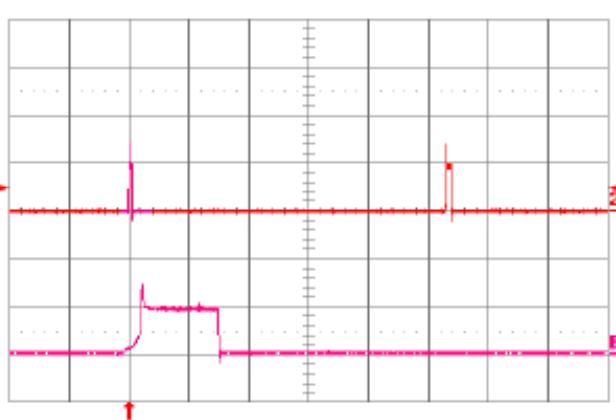

# SQ48 DC-DC Series


## Electrical Specifications: SQ48T/S15015 (1.5 Volt Out)

Conditions:  $T_A = 25^\circ\text{C}$ , Airflow = 300 LFM (1.5 m/s),  $V_{in} = 48\text{ VDC}$ ,  $V_{out} = 1.5\text{ VDC}$ , unless otherwise specified.


Parameter	Notes	Min	Typ	Max	Units
<b>Input Characteristics</b>					
Maximum Input Current	15 ADC, 1.5 VDC Out @ 36 VDC In			0.75	ADC
Input Stand-by Current	$V_{in} = 48\text{V}$ , converter disabled		2.6		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{V}$ , converter enabled		25		mADC
Input Reflected-Ripple Current	25MHz bandwidth		6		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120HZ		TBD		dB
<b>Output Characteristics</b>					
Output Voltage Set Point (no load)		1.485	1.500	1.515	VDC
Output Regulation					
Over Line			$\pm 2$	$\pm 4$	mV
Over Load			$\pm 2$	$\pm 4$	mV
Output Voltage Range	Over line, load and temperature <sup>1</sup>	1.477		1.523	VDC
Output Ripple and Noise - 25 MHz bandwidth	Full load + 10 $\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic	30	50		$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			15,000	$\mu\text{F}$
Output Current Range		0		15	ADC
Current Limit Inception	Non-latching	15.75	18	20	ADC
Peak Short-Circuit Current	Non-latching, Short =10 m $\Omega$ .	30	40		A
RMS Short-Circuit Current	Non-latching			5.3	Arms
<b>Dynamic Response</b>					
Load Change 25% of $I_{out}$ Max, $di/dt = 0.1\text{ A}/\mu\text{s}$	$C_o = 1\text{ }\mu\text{F}$ ceramic	80			mV
$di/dt = 5\text{ A}/\mu\text{s}$	$C_o = 450\text{ }\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic	120			mV
Settling Time to 1%		100			$\mu\text{s}$
<b>Efficiency</b>					
100% Load		84.5			%
50% Load		85.0			%

<sup>1</sup>20 °C to 85 °C.

**Fig. 1.5V.1:** Available load current vs. ambient air temperature and airflow rates for SQ48T15015 converter with D height pins mounted vertically with  $V_{in} = 48\text{ V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

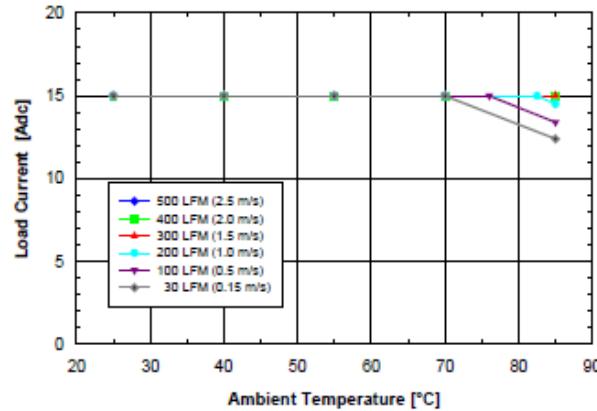


**Fig. 1.5V.2:** Available load current vs. ambient air temperature and airflow rates for SQ48T15015 converter with D height pins mounted horizontally with  $V_{in} = 48\text{ V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

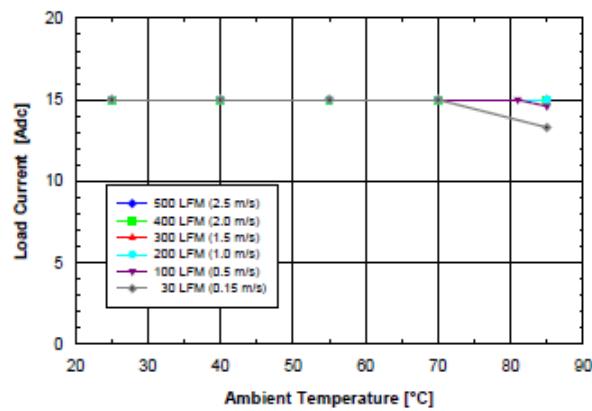


## SQ48 DC-DC Series

### SQ48T/S15015 (1.5 Volt Out)


**Fig. 1.5V.3:** Available load current vs. ambient air temperature and airflow rates for SQ48S15015 converter mounted vertically with  $V_{in} = 48$  V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

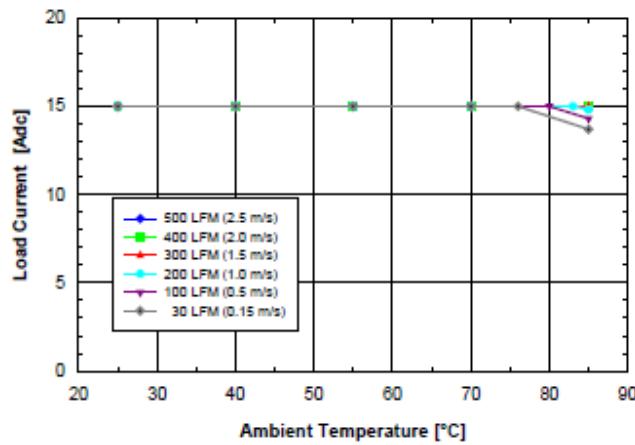


**Fig. 1.5V.5:** Efficiency vs. load current and input voltage for SQ48T/S15015 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25$  °C.

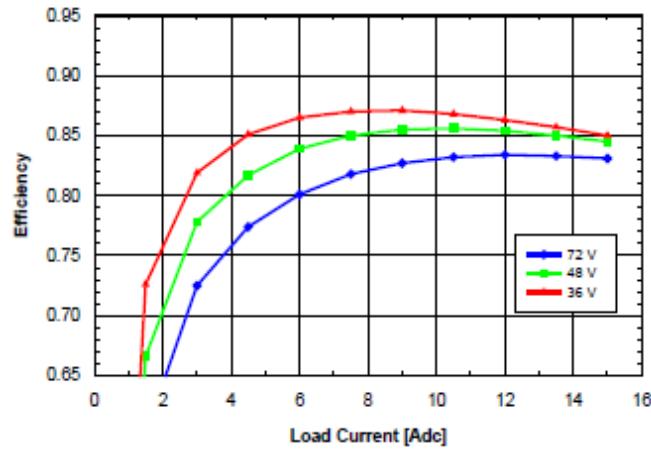

**Fig. 1.5V.4:** Available load current vs. ambient air temperature and airflow rates for SQ48S15015 converter mounted horizontally with  $V_{in} = 48$  V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

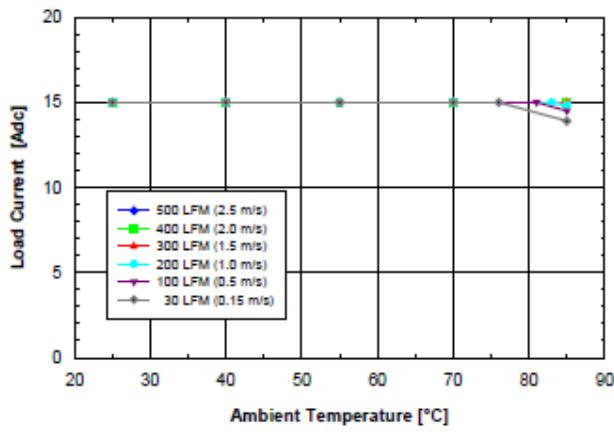


**Fig. 1.5V.6:** Efficiency vs. load current and ambient temperature for SQ48T/S15015 converter mounted vertically with  $V_{in} = 48$  V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

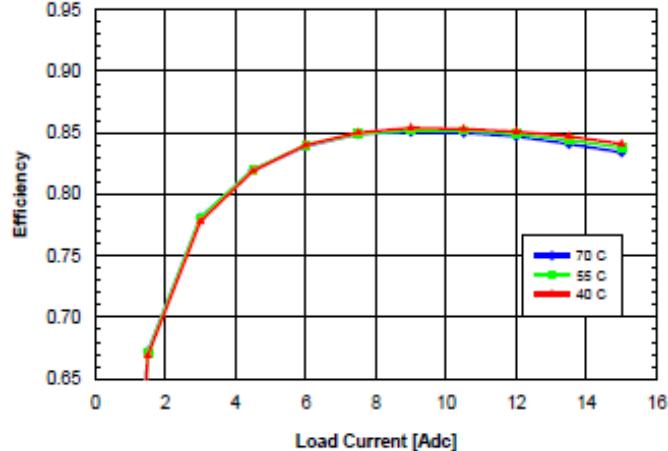


## SQ48 DC-DC Series

### SQ48T/S15015 (1.5 Volt Out)


**Fig. 1.5V.7:** Power dissipation vs. load current and input voltage for SQ48T/S15015 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ\text{C}$ .

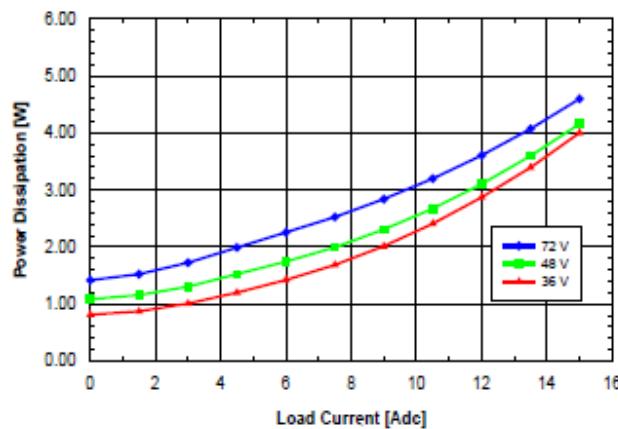


**Fig. 1.5V.8:** Power dissipation vs. load current and ambient temperature for SQ48T/S15015 converter mounted vertically with  $V_{in} = 48\text{ V}$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

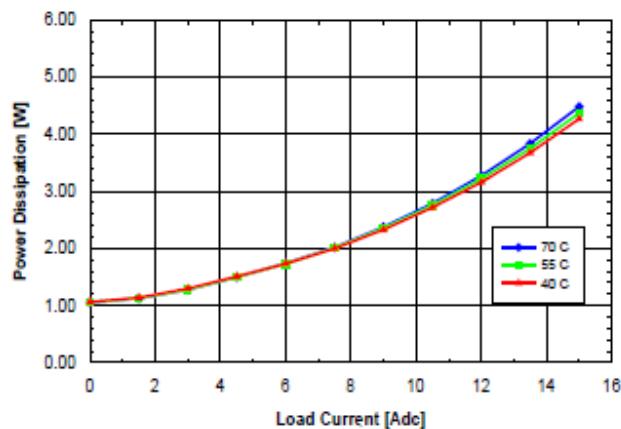

**Fig. 1.5V.9:** Turn-on transient at full rated load current (resistive) with no output capacitor at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.). Time scale: 2 ms/div.

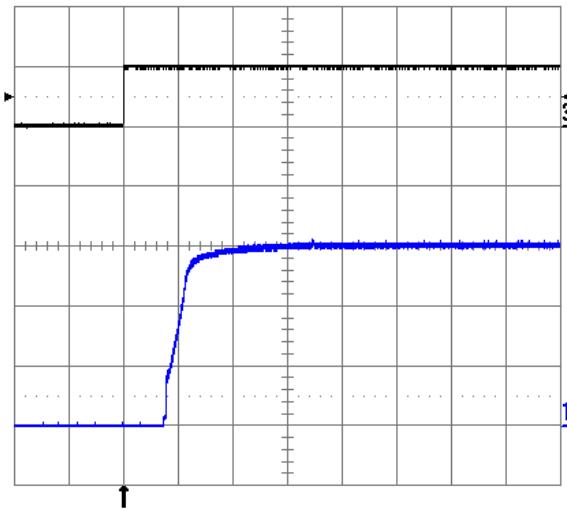


**Fig. 1.5V.10:** Turn-on transient at full rated load current (resistive) plus 10,000  $\mu\text{F}$  at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.). Time scale: 2 ms/div.

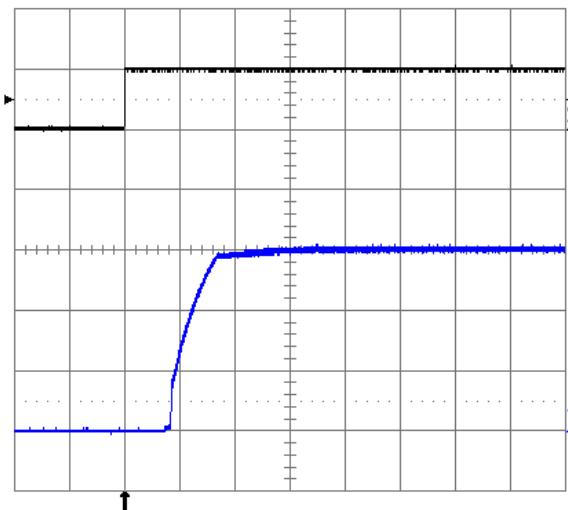


## SQ48 DC-DC Series

### SQ48T/S15015 (1.5 Volt Out)


**Fig. 1.5V.11:** Output voltage response to load current step-change (3.75 A – 7.5 A – 3.75 A) at  $V_{in} = 48$  V. Top trace: output voltage (100 mV/div.). Bottom trace: load current (5 A/div.). Current slew rate: 0.1 A/ $\mu$ s.  $Co = 1 \mu$ F ceramic. Time scale: 0.2 ms/div.

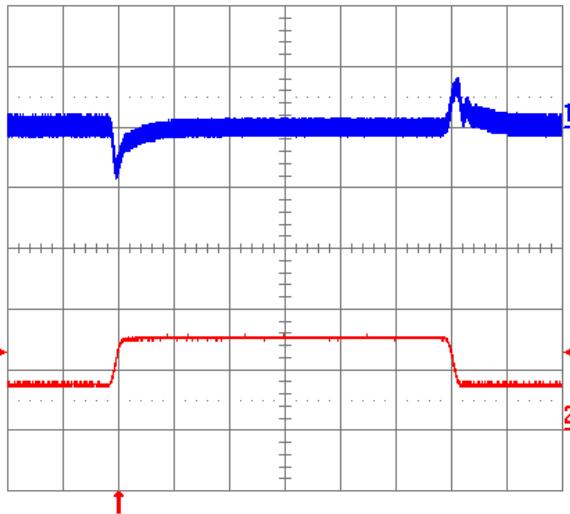


**Fig. 1.5V.13:** Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with  $Co = 10 \mu$ F tantalum + 1  $\mu$ F ceramic and  $V_{in} = 48$  V. Time scale: 1  $\mu$ s/div.

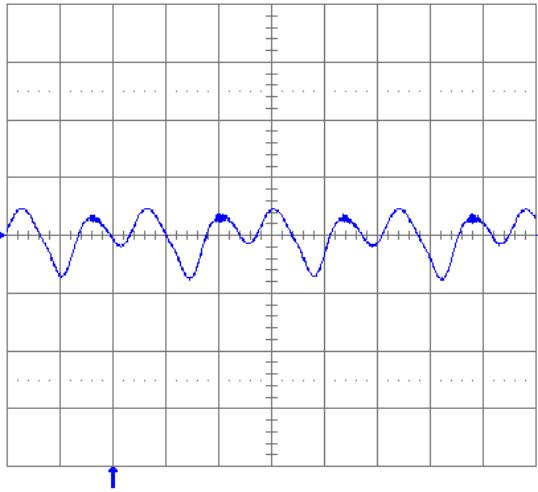

**Fig. 1.5V.12:** Output voltage response to load current step-change (3.75 A – 7.5 A – 3.75 A) at  $V_{in} = 48$  V. Top trace: output voltage (100 mV/div.). Bottom trace: load current (5 A/div.). Current slew rate: 5 A/ $\mu$ s.  $Co = 450 \mu$ F tantalum + 1  $\mu$ F ceramic. Time scale: 0.2 ms/div.

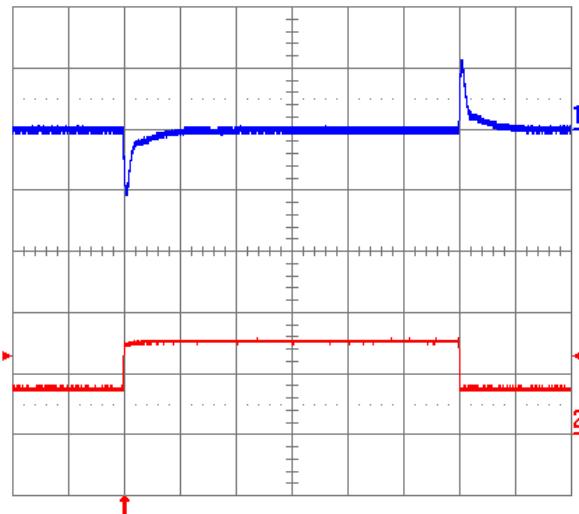


**Fig. 1.5V.14:** Test Setup for measuring input reflected ripple currents,  $i_s$  and  $i_c$

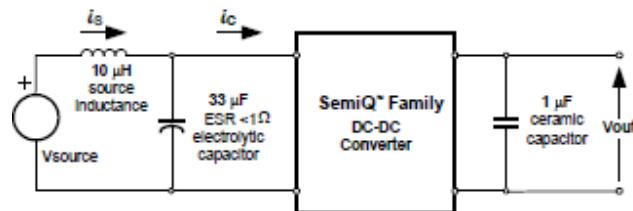


# SQ48 DC-DC Series

## SQ48T/S15015 (1.5 Volt Out)


**Fig. 1.5V.15:** Input reflected ripple current,  $i_s$  (100 mA/div.), measured at input terminals at full rated load current and  $V_{in} = 48$  V. Refer to Fig. 1.5V.14 for test setup. Time scale: 1  $\mu$ s/div.

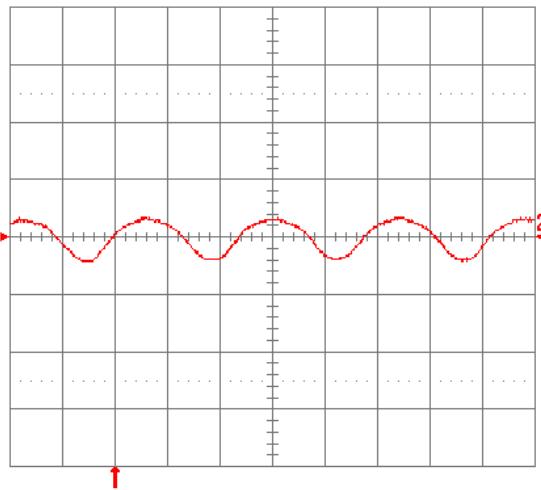


**Fig. 1.5V.17:** Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

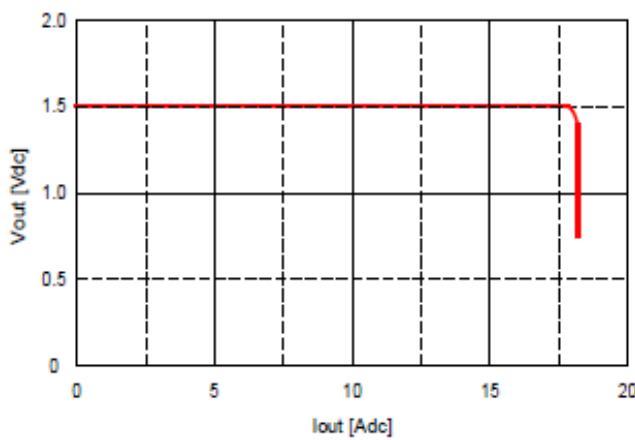

**Fig. 1.5V.16:** Input reflected ripple current,  $i_s$  (10 mA/div.), measured through 10  $\mu$ H at the source at full rated load current and  $V_{in} = 48$  V. Refer to Fig. 1.5V.14 for test setup. Time scale: 1  $\mu$ s/div.

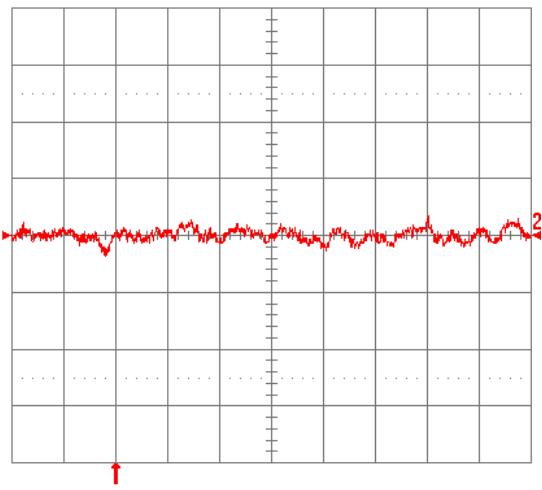

**Fig. 1.5V.18:** Load current (top trace, 20 A/div., 20 ms/div.) into a 10 m $\Omega$  short circuit during restart, at  $V_{in} = 48$  V. Bottom trace (20 A/div., 1 ms/div.) is an expansion of the on-time portion of the top trace.

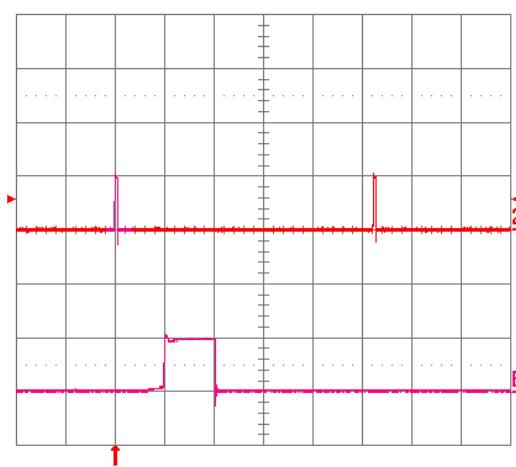

# SQ48 DC-DC Series


## Electrical Specifications: SQ48T/S15012 (1.2 Volt Out)

Conditions:  $T_A = 25^\circ\text{C}$ , Airflow = 300 LFM (1.5 m/s),  $V_{in} = 48\text{ VDC}$ ,  $V_{out} = 1.2\text{ VDC}$ , unless otherwise specified.


Parameter	Notes	Min	Typ	Max	Units
<b>Input Characteristics</b>					
Maximum Input Current	15 ADC, 1.2 VDC Out @ 36 VDC In			0.62	ADC
Input Stand-by Current	$V_{in} = 48\text{V}$ , converter disabled		2.6		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{V}$ , converter enabled		22		mADC
Input Reflected-Ripple Current	25MHz bandwidth		6		$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120HZ		TBD		dB
<b>Output Characteristics</b>					
Output Voltage Set Point (no load)		1.188	1.200	1.212	VDC
Output Regulation					
Over Line			$\pm 1$	$\pm 3$	mV
Over Load			$\pm 1$	$\pm 3$	mV
Output Voltage Range	Over line, load and temperature <sup>1</sup>	1.182		1.218	VDC
Output Ripple and Noise - 25 MHz bandwidth	Full load + 10 $\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic		30	50	$\text{mV}_{\text{PK-PK}}$
External Load Capacitance	Plus full load (resistive)			15,000	$\mu\text{F}$
Output Current Range		0		15	ADC
Current Limit Inception	Non-latching	15.75	18	20	ADC
Peak Short-Circuit Current	Non-latching, Short = 10 $\text{m}\Omega$ .		30	40	A
RMS Short-Circuit Current	Non-latching			5.3	Arms
<b>Dynamic Response</b>					
Load Change 25% of $I_{out}$ Max, $dI/dt = 0.1\text{ A}/\mu\text{s}$	$C_o = 1\text{ }\mu\text{F}$ ceramic		90		mV
$dI/dt = 5\text{ A}/\mu\text{s}$	$C_o = 450\text{ }\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic		120		mV
Settling Time to 1%			100		$\mu\text{s}$
<b>Efficiency</b>					
100% Load			82.0		%
50% Load			83.0		%

<sup>1</sup>40 °C to 85 °C.

**Fig. 1.2V.1:** Available load current vs. ambient air temperature and airflow rates for SQ48T15012 converter with D height pins mounted vertically with  $V_{in} = 48\text{ V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

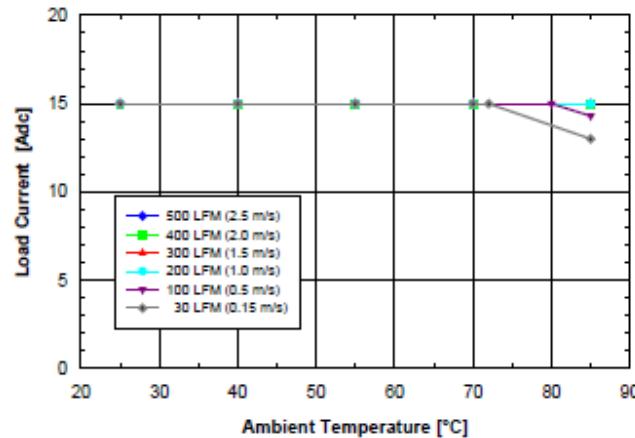


**Fig. 1.2V.2:** Available load current vs. ambient air temperature and airflow rates for SQ48T15012 converter with D height pins mounted horizontally with  $V_{in} = 48\text{ V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

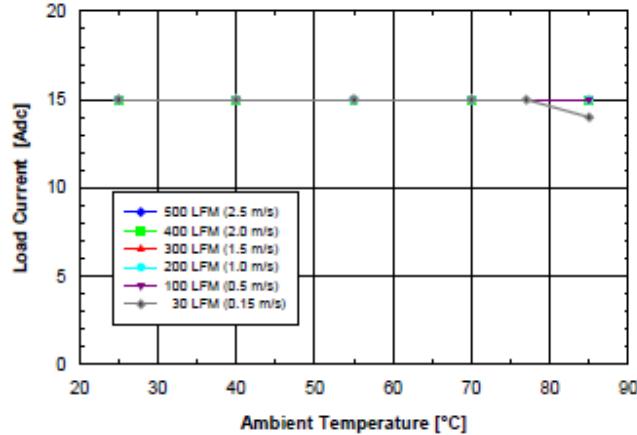


# SQ48 DC-DC Series

## SQ48T/S15012 (1.2 Volt Out)


**Fig. 1.2V.3:** Available load current vs. ambient air temperature and airflow rates for SQ48S15012 converter mounted vertically with  $V_{in} = 48$  V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

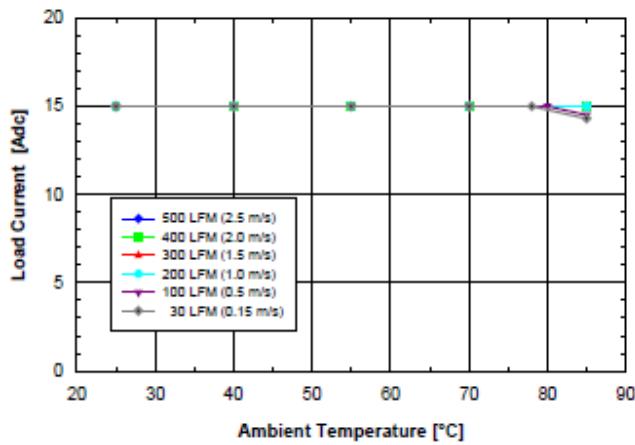


**Fig. 1.2V.5:** Efficiency vs. load current and input voltage for SQ48T/S15012 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25$  °C.

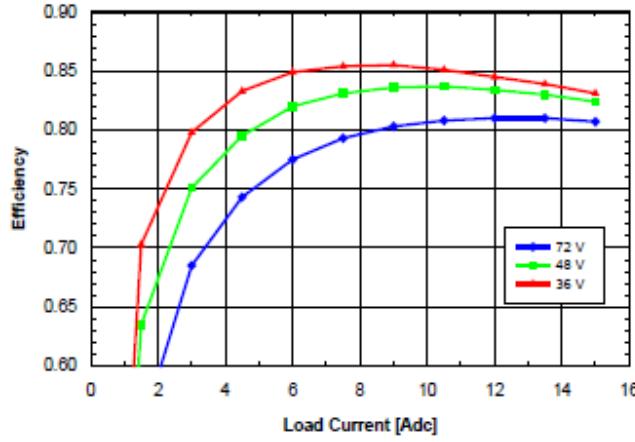

**Fig. 1.2V.4:** Available load current vs. ambient air temperature and airflow rates for SQ48S15012 converter mounted horizontally with  $V_{in} = 48$  V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

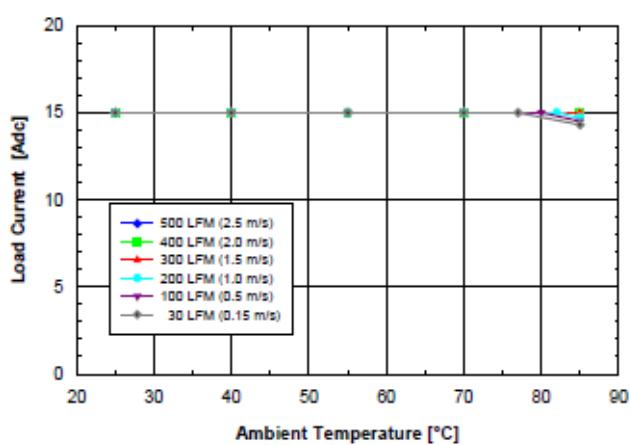


**Fig. 1.2V.6:** Efficiency vs. load current and ambient temperature for SQ48T/S15012 converter mounted vertically with  $V_{in} = 48$  V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

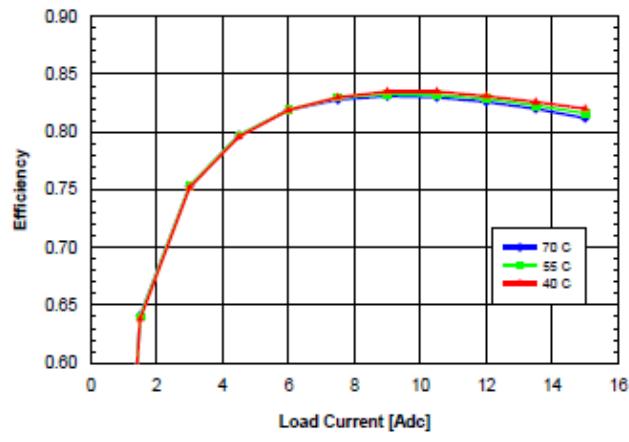


# SQ48 DC-DC Series

## SQ48T/S15012 (1.2 Volt Out)


**Fig. 1.2V.7:** Power dissipation vs. load current and input voltage for SQ48T/S15012 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ\text{C}$ .

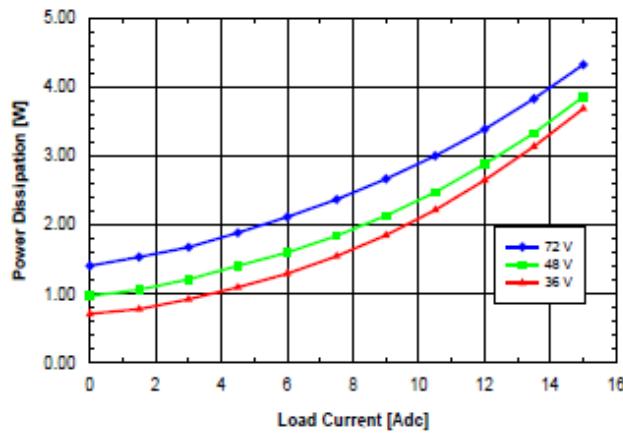


**Fig. 1.2V.8:** Power dissipation vs. load current and ambient temperature for SQ48T/S15012 converter mounted vertically with  $V_{in} = 48\text{ V}$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

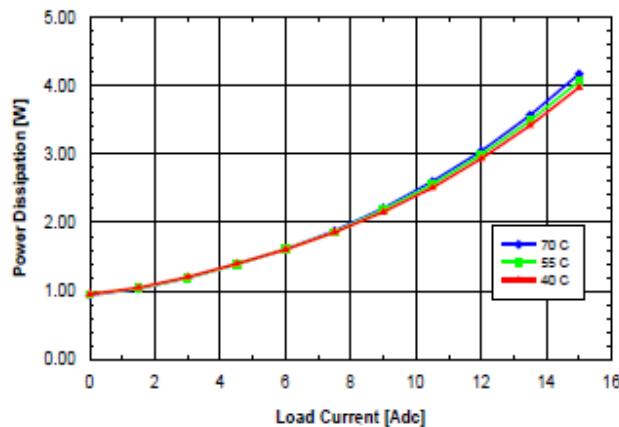

**Fig. 1.2V.9:** Turn-on transient at full rated load current (resistive) with no output capacitor at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.). Time scale: 2 ms/div.

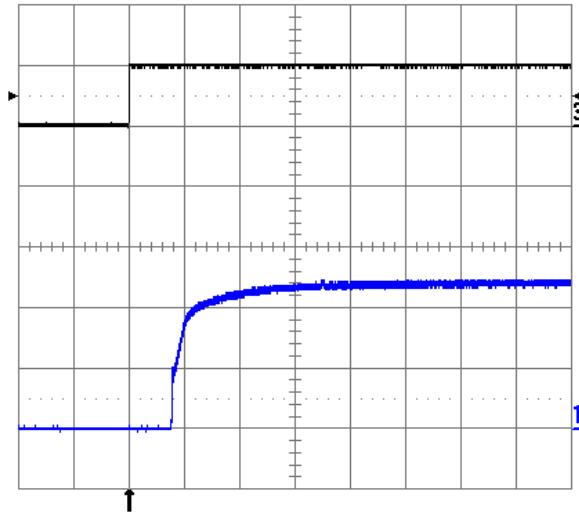

**Fig. 1.2V.10:** Turn-on transient at full rated load current (resistive) plus 10,000  $\mu\text{F}$  at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.). Time scale: 2 ms/div.

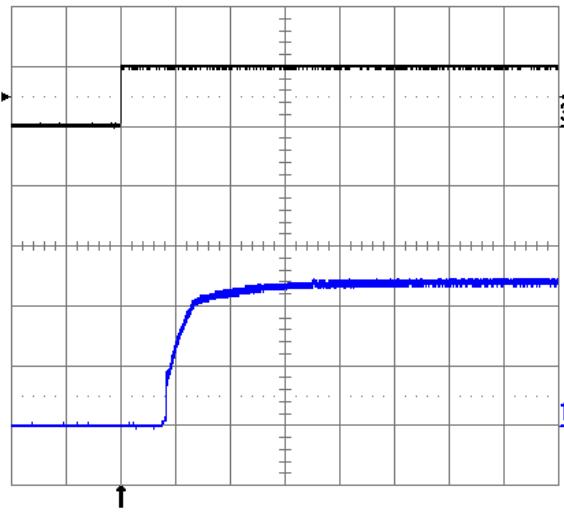

866.513.2839


tech.support@psbel.com

belpowersolutions.com


# SQ48 DC-DC Series

## SQ48T/S15012 (1.2 Volt Out)


**Fig. 1.2V.11:** Output voltage response to load current step-change (3.75 A – 7.5 A – 3.75 A) at Vin = 48 V. Top trace: output voltage (100 mV/div.). Bottom trace: load current (5 A/div.). Current slew rate: 0.1 A/μs. Co = 1 μF ceramic. Time scale: 0.2 ms/div.

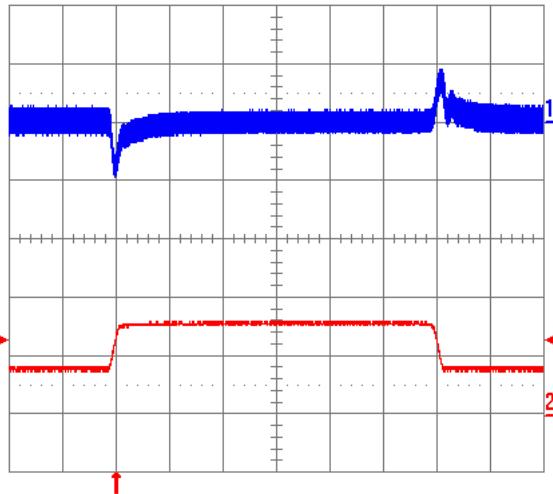


**Fig. 1.2V.13:** Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with Co = 10 μF tantalum + 1 μF ceramic and Vin = 48 V. Time scale: 1 μs/div.

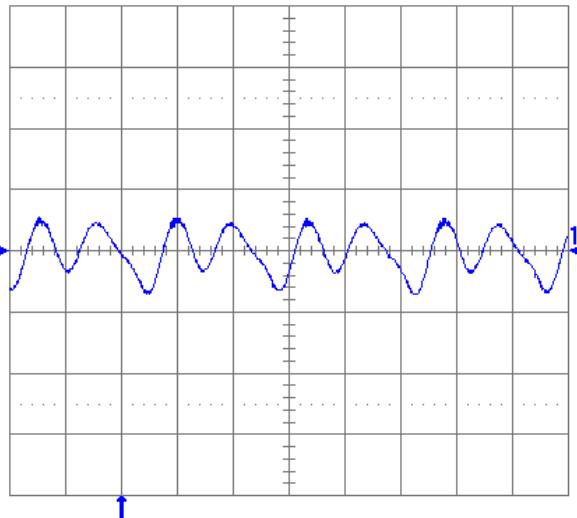

**Fig. 1.2V.12:** Output voltage response to load current step-change (3.75 A – 7.5 A – 3.75 A) at Vin = 48 V. Top trace: output voltage (100 mV/div.). Bottom trace: load current (5 A/div.). Current slew rate: 0.1 A/μs. Co = 450 μF tantalum + 1 μF ceramic. Time scale: 0.2 ms/div.

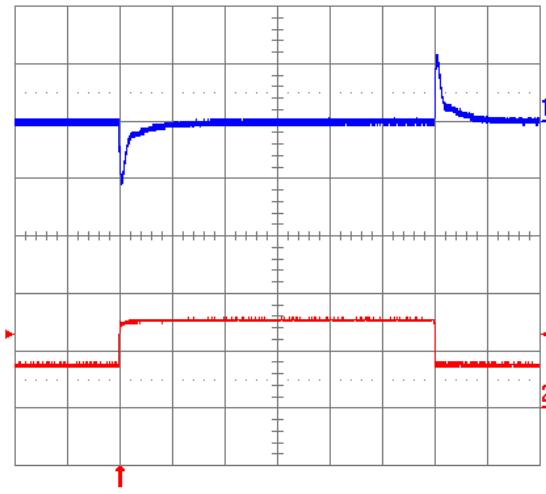


**Fig. 1.2V.14:** Test Setup for measuring input reflected ripple currents,  $i_s$  and  $i_c$

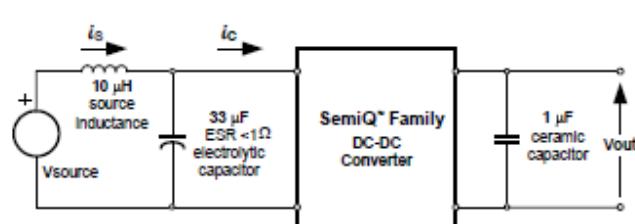


## SQ48 DC-DC Series

### SQ48T/S15012 (1.2 Volt Out)


**Fig. 1.2V.15:** Input reflected ripple current,  $i_s$  (100 mA/div.), measured at input terminals at full rated load current and  $V_{in} = 48$  V. Refer to Fig. 1.2V.14 for test setup. Time scale: 1  $\mu$ s/div.

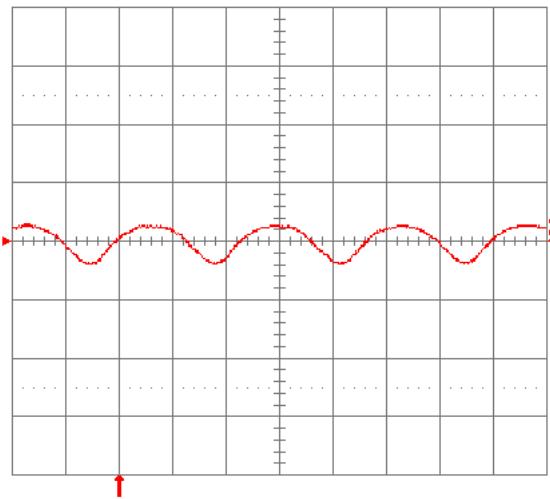


**Fig. 1.2V.16:** Input reflected ripple current,  $i_s$  (10 mA/div.), measured through 10  $\mu$ H at the source at full rated load current and  $V_{in} = 48$  V. Refer to Fig. 1.2V.14 for test setup. Time scale: 1  $\mu$ s/div.

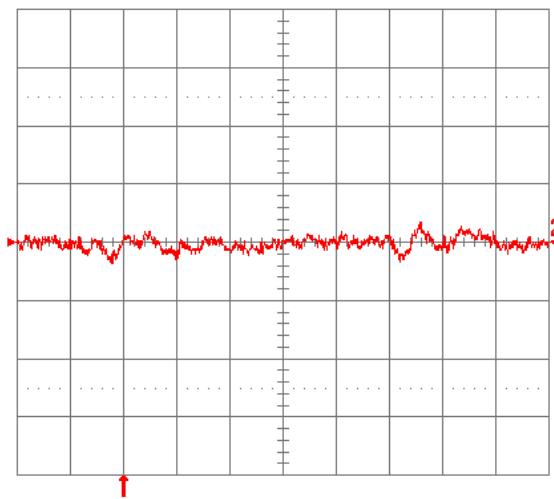

**Fig. 1.2V.17:** Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

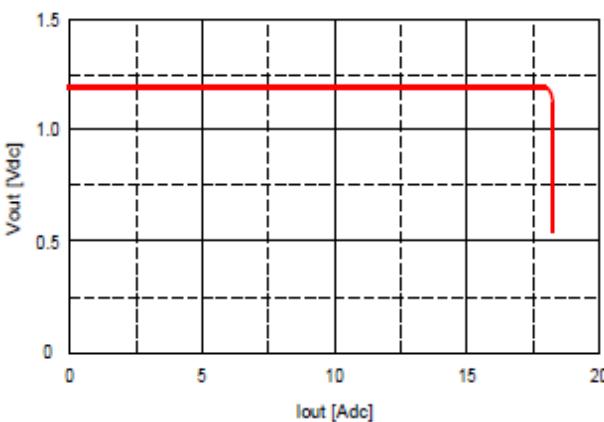

**Fig. 1.2V.18:** Load current (top trace, 20 A/div., 20 ms/div.) into a 10 m $\Omega$  short circuit during restart, at  $V_{in} = 48$  V. Bottom trace (20 A/div., 1 ms/div.) is an expansion of the on-time portion of the top trace.

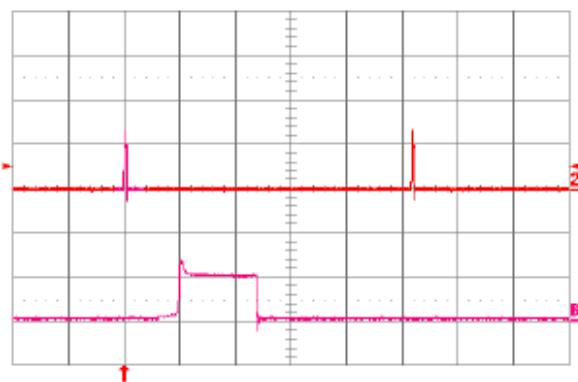

# SQ48 DC-DC Series


## Electrical Specifications: SQ48T/S15010 (1.0 Volt Out)

Conditions:  $T_A = 25^\circ\text{C}$ , Airflow = 300 LFM (1.5 m/s),  $V_{in} = 48\text{ VDC}$ ,  $V_{out} = 1.0\text{ VDC}$ , unless otherwise specified.


Parameter	Notes	Min	Typ	Max	Units
<b>Input Characteristics</b>					
Maximum Input Current	15 ADC, 1.0 VDC Out @ 36 VDC In			0.52	ADC
Input Stand-by Current	$V_{in} = 48\text{V}$ , converter disabled		3		mADC
Input No Load Current (0 load on the output)	$V_{in} = 48\text{V}$ , converter enabled		22		mADC
Input Reflected-Ripple Current	25MHz bandwidth		7.5		mA <sub>PK-PK</sub>
Input Voltage Ripple Rejection	120HZ		TBD		dB
<b>Output Characteristics</b>					
Output Voltage Set Point (no load)		0.990	1.000	1.010	VDC
Output Regulation					
Over Line			$\pm 1$	$\pm 2$	mV
Over Load			$\pm 1$	$\pm 3$	mV
Output Voltage Range	Over line, load and temperature <sup>1</sup>	0.985		1.015	VDC
Output Ripple and Noise - 25 MHz bandwidth	Full load + 10 $\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic		30	50	mV <sub>PK-PK</sub>
External Load Capacitance	Plus full load (resistive)			15,000	$\mu\text{F}$
Output Current Range		0		15	ADC
Current Limit Inception	Non-latching	15.75	18	20	ADC
Peak Short-Circuit Current	Non-latching, Short = 10 m $\Omega$ .		30	40	A
RMS Short-Circuit Current	Non-latching			5.3	Arms
<b>Dynamic Response</b>					
Load Change 25% of I <sub>out</sub> Max, $dI/dt = 0.1\text{ A}/\mu\text{s}$	$C_o = 1\text{ }\mu\text{F}$ ceramic		90		mV
$dI/dt = 5\text{ A}/\mu\text{s}$	$C_o = 450\text{ }\mu\text{F}$ tantalum + 1 $\mu\text{F}$ ceramic		140		mV
Settling Time to 1%			100		$\mu\text{s}$
<b>Efficiency</b>					
100% Load			80.5		%
50% Load			81.0		%

<sup>1</sup>40 °C to 85 °C.

**Fig. 1.0V.1:** Available load current vs. ambient air temperature and airflow rates for SQ48T15010 converter with D height pins mounted vertically with  $V_{in} = 48\text{ V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

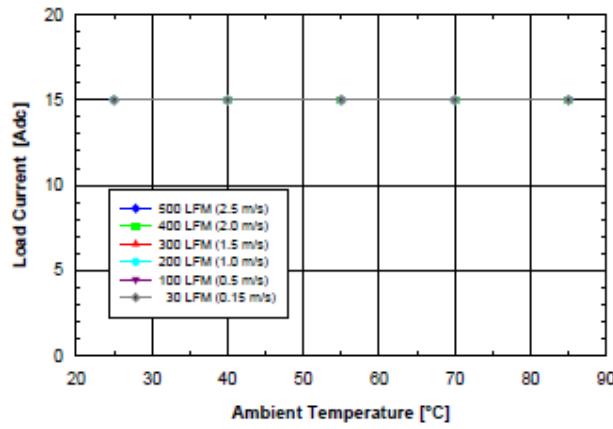


**Fig. 1.0V.2:** Available load current vs. ambient air temperature and airflow rates for SQ48T15010 converter with D height pins mounted horizontally with  $V_{in} = 48\text{ V}$ , air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120^\circ\text{C}$ .

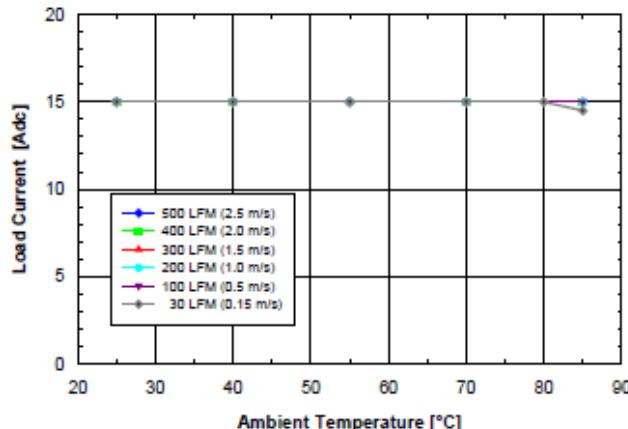


# SQ48 DC-DC Series

## SQ48T/S15010 (1.0 Volt Out)


**Fig. 1.0V.3:** Available load current vs. ambient air temperature and airflow rates for SQ48S15010 converter mounted vertically with  $V_{in} = 48$  V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

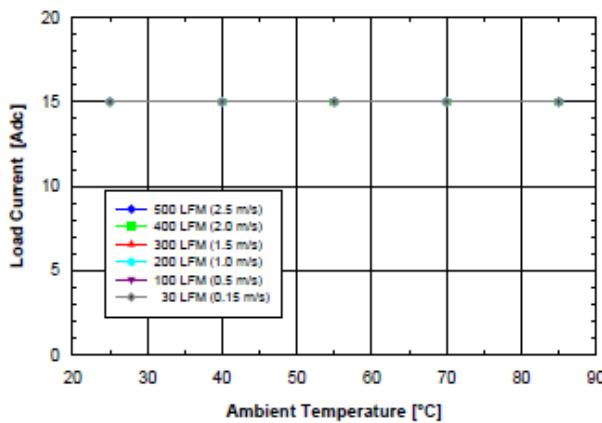


**Fig. 1.0V.4:** Available load current vs. ambient air temperature and airflow rates for SQ48S15010 converter mounted horizontally with  $V_{in} = 48$  V, air flowing from pin 3 to pin 1, and maximum FET temperature  $\leq 120$  °C.

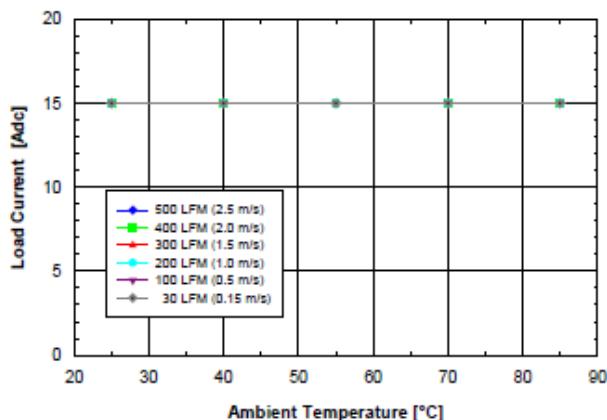

**Fig. 1.0V.5:** Efficiency vs. load current and input voltage for SQ48T/S15010 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25$  °C.

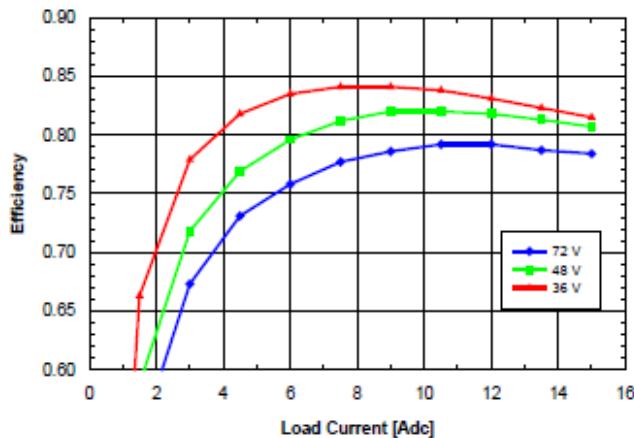


**Fig. 1.0V.6:** Efficiency vs. load current and ambient temperature for SQ48T/S15010 converter mounted vertically with  $V_{in} = 48$  V and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

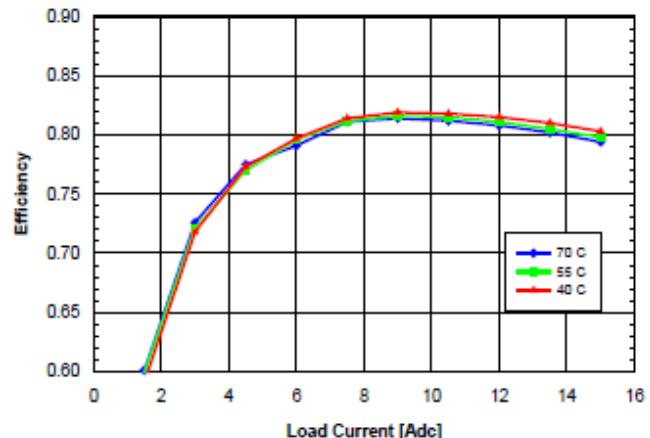


# SQ48 DC-DC Series

## SQ48T/S15010 (1.0 Volt Out)


**Fig. 1.0V.7:** Power dissipation vs. load current and input voltage for SQ48T/S15010 converter mounted vertically with air flowing from pin 3 to pin 1 at a rate of 300 LFM (1.5 m/s) and  $T_a = 25^\circ\text{C}$ .

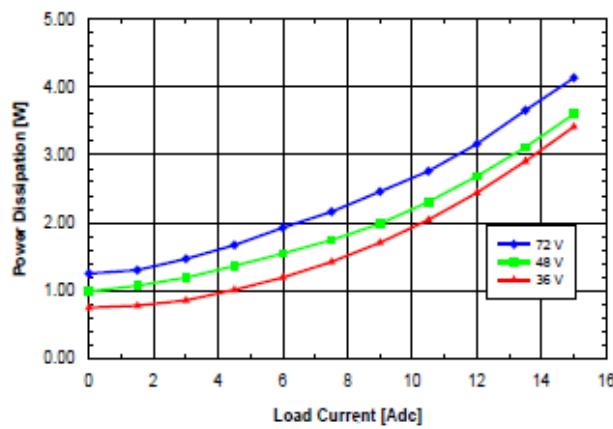


**Fig. 1.0V.8:** Power dissipation vs. load current and ambient temperature for SQ48T/S15010 converter mounted vertically with  $V_{in} = 48\text{ V}$  and air flowing from pin 3 to pin 1 at a rate of 200 LFM (1.0 m/s).

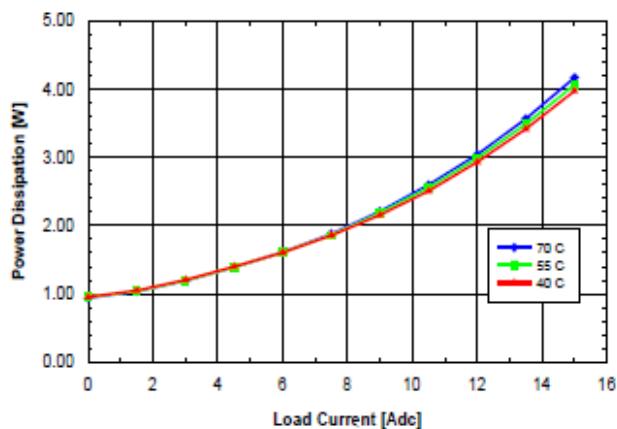

**Fig. 1.0V.9:** Turn-on transient at full rated load current (resistive) with no output capacitor at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.). Time scale: 2 ms/div.

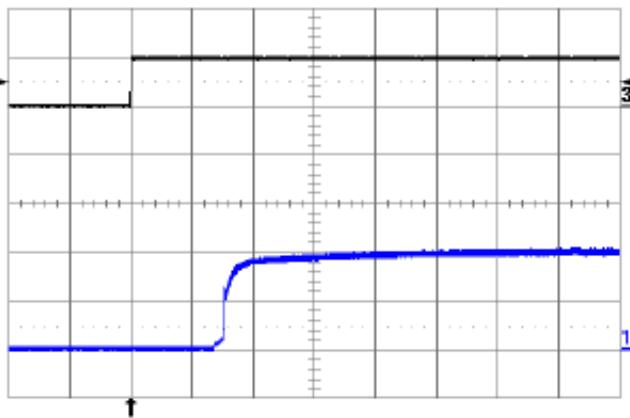


**Fig. 1.0V.10:** Turn-on transient at full rated load current (resistive) plus 10,000  $\mu\text{F}$  at  $V_{in} = 48\text{ V}$ , triggered via ON/OFF pin. Top trace: ON/OFF signal (5 V/div.). Bottom trace: output voltage (0.5 V/div.). Time scale: 2 ms/div.

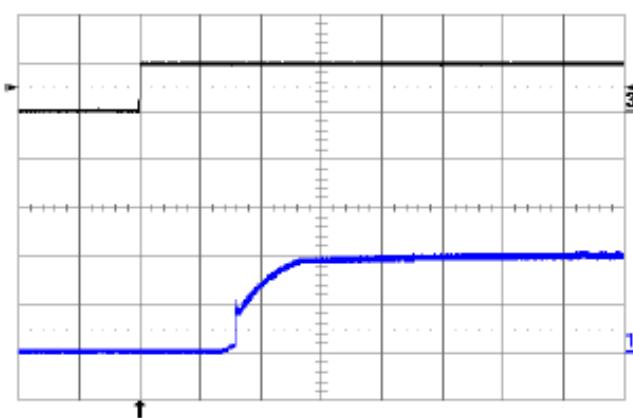


## SQ48 DC-DC Series

### SQ48T/S15010 (1.0 Volt Out)


**Fig. 1.0V.11:** Output voltage response to load current step-change (3.75 A – 7.5 A – 3.75 A) at Vin = 48 V. Top trace: output voltage (100 mV/div.). Bottom trace: load current (5 A/div.). Current slew rate: 0.1 A/μs. Co = 1 μF ceramic. Time scale: 0.2 ms/div.

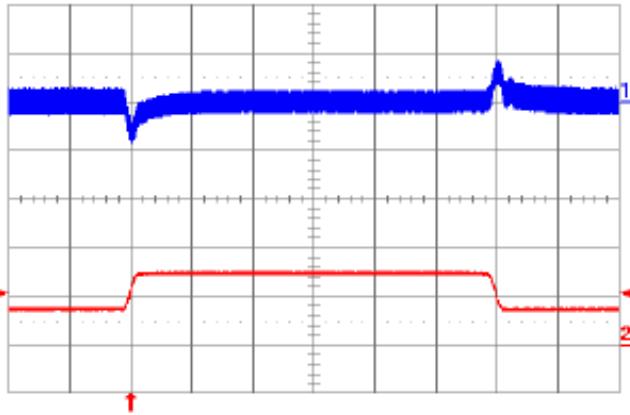


**Fig. 1.0V.13:** Output voltage ripple (20 mV/div.) at full rated load current into a resistive load with Co = 10 μF tantalum + 1 μF ceramic and Vin = 48 V. Time scale: 1 μs/div.

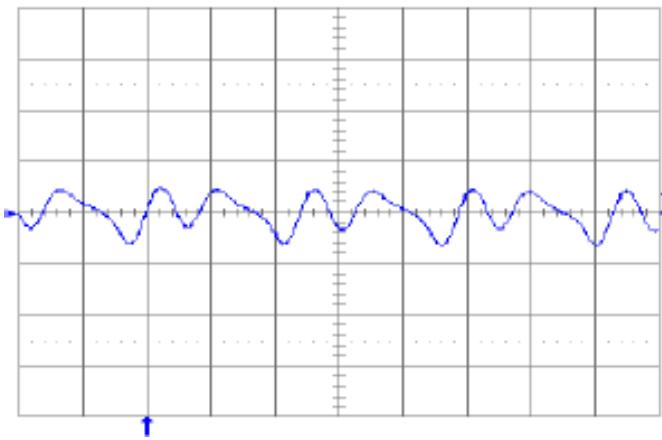

**Fig. 1.0V.12:** Output voltage response to load current step-change (3.75 A – 7.5 A – 3.75 A) at Vin = 48 V. Top trace: output voltage (100 mV/div.). Bottom trace: load current (5 A/div.). Current slew rate: 5 A/μs. Co = 450 μF tantalum + 1 μF ceramic. Time scale: 0.2 ms/div.

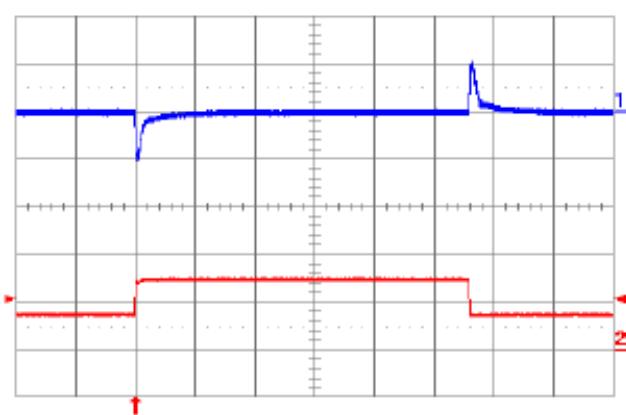


**Fig. 1.0V.14:** Test Setup for measuring input reflected ripple currents,  $i_s$  and  $i_c$

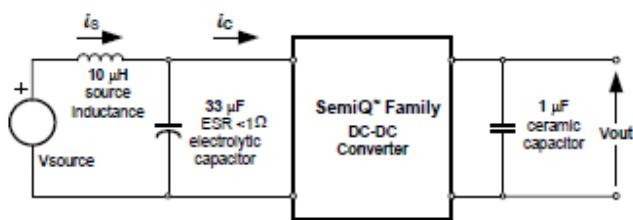


## SQ48 DC-DC Series

### SQ48T/S15010 (1.0 Volt Out)


**Fig. 1.0V.15:** Input reflected ripple current,  $i_s$  (100 mA/div.), measured at input terminals at full rated load current and  $V_{in} = 48$  V. Refer to Fig. 1.0V.14 for test setup. Time scale: 1  $\mu$ s/div.

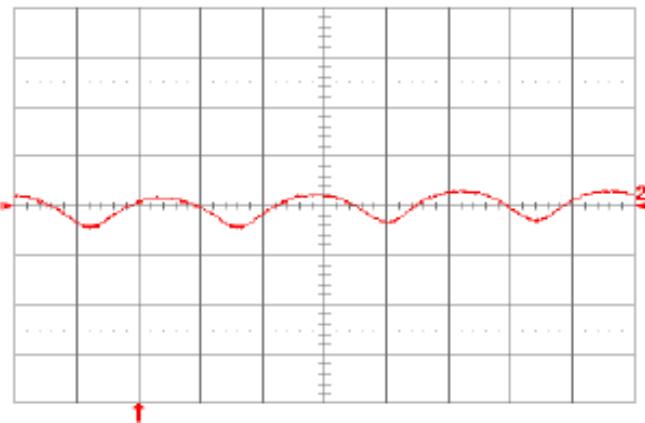


**Fig. 1.0V.16:** Input reflected ripple current,  $i_s$  (10 mA/div.), measured through 10  $\mu$ H at the source at full rated load current and  $V_{in} = 48$  V. Refer to Fig. 1.0V.14 for test setup. Time scale: 1  $\mu$ s/div.

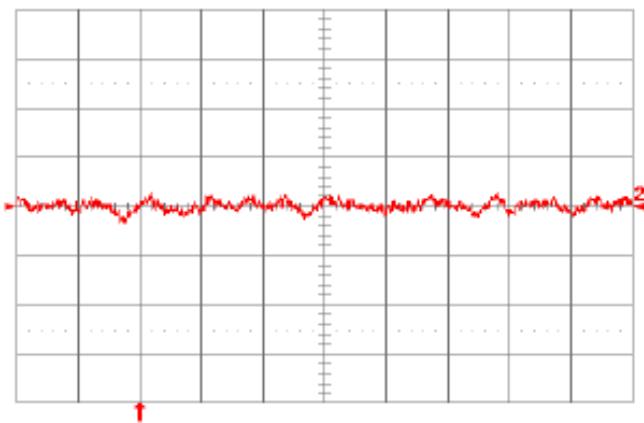

**Fig. 1.0V.17:** Output voltage vs. load current showing current limit point and converter shutdown point. Input voltage has almost no effect on current limit characteristic.

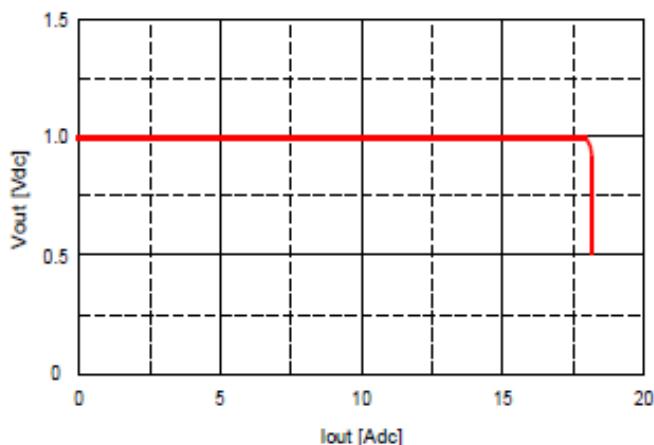


**Fig. 1.0V.18:** Load current (top trace, 20 A/div., 20 ms/div.) into a 10 m $\Omega$  short circuit during restart, at  $V_{in} = 48$  V. Bottom trace (20 A/div., 1 ms/div.) is an expansion of the on-time portion of the top trace.

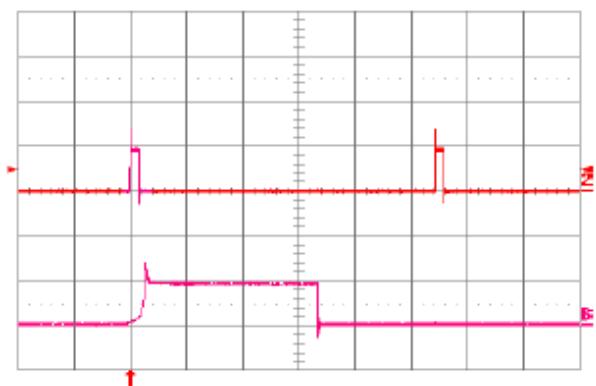


## SQ48 DC-DC Series

### Physical Information


**SQ48S Pinout (Surface Mount)**

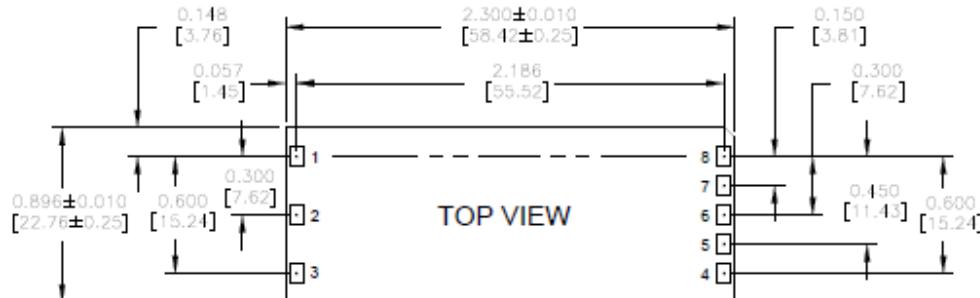


**SIDE VIEW**

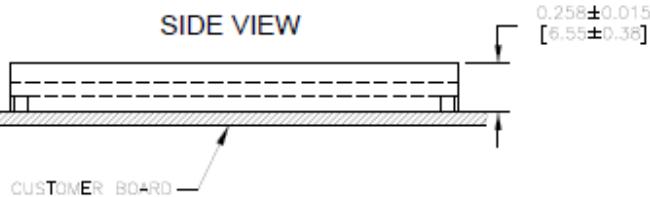

**SQ48T Pinout (Through-hole)**

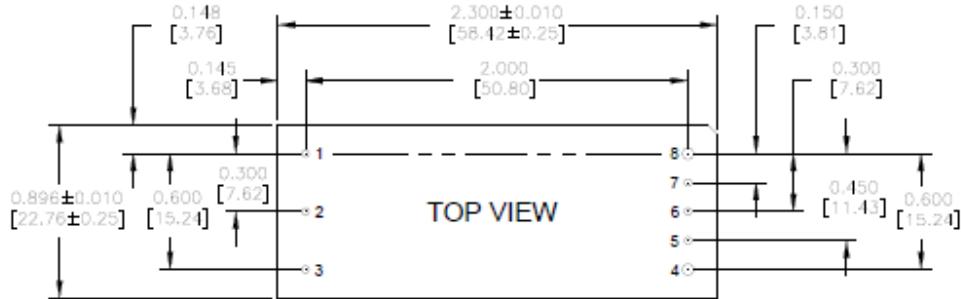

**SIDE VIEW**

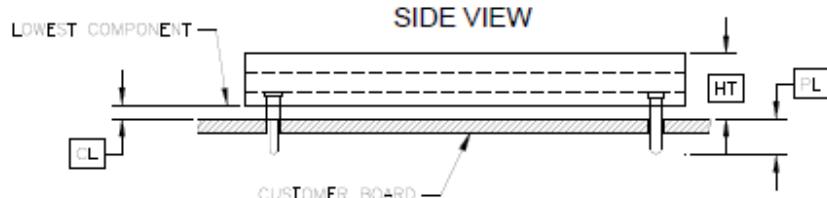

866.513.2839

tech.support@psbel.com

[belpowersolutions.com](http://belpowersolutions.com)

# SQ48 DC-DC Series

Height Option	HT (Max. Height)	CL (Min. Clearance)
	+0.000 [+0.00] -0.038 [- 0.97]	+0.016 [+0.41] -0.000 [- 0.00]
A	0.303 [7.69]	0.030 [0.77]
B	0.336 [8.53]	0.063 [1.60]
C	0.500 [12.70]	0.227 [5.77]
D	0.400 [10.16]	0.127 [3.23]
E	0.282 [7.16]	0.009 [0.23]

Pin Option	PL Pin Length
	±0.005 [±0.13]
A	0.188 [4.77]
B	0.145 [3.68]
C	0.110 [2.79]

Pad/Pin Connections	
Pad/Pin #	Function
1	Vin (+)
2	ON/OFF
3	Vin (-)
4	Vout (-)
5	SENSE(-)
6	TRIM
7	SENSE(+)
8	Vout (+)

## SQE48S Platform Notes

- All dimensions are in inches [mm]
- Connector Material: Copper
- Connector Finish: Gold over Nickel
- Converter Weight: 0.66 oz [18.5 g]
- Recommended Surface-Mount Pads:  
Min. 0.080" X 0.112" [2.03 x 2.84]  
Max. 0.092" X 0.124" [2.34 x 3.15]

## SQE48T Platform Notes

- All dimensions are in inches [mm]
- Pins 1-3 and 5-7 are Ø 0.040" [1.02] with Ø 0.078" [1.98] shoulder
- Pins 4 and 8 are Ø 0.062" [1.57] without shoulder
- Pin Material: Brass
- Pin Finish: Tin / Lead over Nickel or Matte Tin over Nickel for "G" version
- Converter Weight: 0.53 oz [15 g]

## Converter Part Numbering / Ordering Information

Product Series	Input Voltage	Mounting Scheme	Rated Load Current	Output Voltage	ON/OFF Logic	Maximum Height [HT]	Pin Length [PL]	Special Features	Environmental	
SQ	48	T	15	012	-	N	B	A	0	
One-Eighth Brick Format	36-75 V	Surface Mount	15 ⇒ 15 A (1.0 – 3.3 V)	010 ⇒ 1.0 V	N ⇒ Negative	SMT S ⇒ 0.273"	SMT 0 ⇒ 0.00"	0 ⇒ STD	No Suffix ⇒ RoHS lead-solder-exemption compliant	
				012 ⇒ 1.2 V						
				015 ⇒ 1.5 V						
				018 ⇒ 1.8 V						
				020 ⇒ 2.0 V						
		Through-hole	10 ⇒ 10 A (5.0 V)	025 ⇒ 2.5 V	P ⇒ Positive	Through hole A ⇒ 0.303"	Through hole B ⇒ 0.336"	T ⇒ Alternative Trim A ⇒ 0.188" B ⇒ 0.145" C ⇒ 0.500" D ⇒ 0.400" E ⇒ 0.282"	Option (For 1.2 V, 1.0 V only)	G ⇒ RoHS compliant for all six substances
				033 ⇒ 3.3 V						
				050 ⇒ 5.0 V						
				060 ⇒ 6.0 V						
				080 ⇒ 8.0 V						
				120 ⇒ 12.0 V						

The example above describes P/N SQ48T15012-NBA0: 36-75 V input, through-hole mounting, 15 A @ 1.2 V output, negative ON/OFF logic, a maximum height of 0.336", a through the board pin length of 0.188", standard trim equations, and Eutectic Tin/Lead solder. Please consult factory for the complete list of available options.

## For more information on these products consult

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

866.513.2839

tech.support@psbel.com

belpowersolutions.com