

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Rohm Semiconductor](#)
[BC848CT116](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

BC848BW / BC848B / BC848C

Transistors


NPN General Purpose Transistor

BC848BW / BC848B / BC848C

●Features

- 1) V_{CE0} minimum is 30V ($I_c=1mA$)
- 2) Complements the BC858B / BC858BW.

●External dimensions (Units : mm)

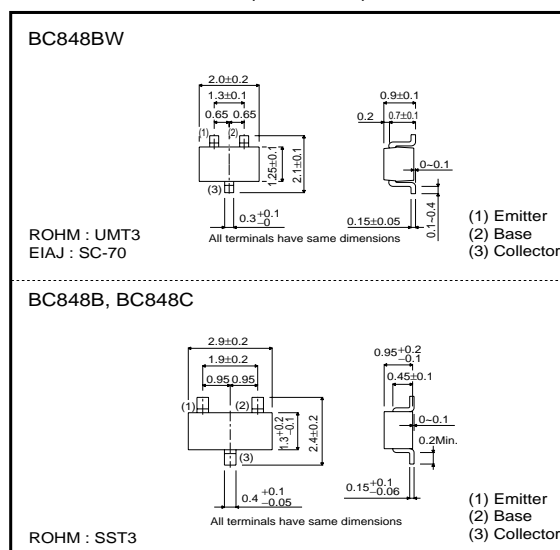

●Absolute maximum ratings ($T_a=25^{\circ}C$)

Parameter	Symbol	Limits	Unit
Collector-base voltage	V_{CB0}	30	V
Collector-emitter voltage	V_{CEO}	30	V
Emitter-base voltage	V_{EBO}	5	V
Collector current	I_c	0.1	A
Collector power dissipation	P_c	0.2	W *
		0.35	
Junction temperature	T_j	150	$^{\circ}C$
Storage temperature	T_{stg}	-55~+150	$^{\circ}C$

* When mounted on a 7×5×0.6mm ceramic board.

●Electrical characteristics ($T_a=25^{\circ}C$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	V_{CB0}	30	—	—	V	$I_c=50\mu A$
Collector-emitter breakdown voltage	V_{CEO}	30	—	—	V	$I_c=1mA$
Emitter-base breakdown voltage	V_{EBO}	5	—	—	V	$I_E=50\mu A$
Collector cutoff current	I_{CB0}	—	—	15	μA	$V_{CB}=30V$
		—	—	5		$V_{CB}=30V, T_a=150^{\circ}C$
Collector-emitter saturation voltage	$V_{CE(sat)}$	—	—	0.25	V	$I_c/I_B=10mA/0.5mA$
		—	—	0.6		$I_c/I_B=100mA/5mA$
Base-emitter saturation voltage	$V_{BE(on)}$	0.58	—	0.77	V	$V_{CE}/I_c=5V/10mA$
DC current transfer ratio	h_{FE}	200	—	450	—	$V_{CE}/I_c=5V/2mA$ (BC848B/BW)
		420	—	800		$V_{CE}/I_c=5V/2mA$ (BC848C)
Transition frequency	f_r	—	200	—	MHz	$V_{CE}=5V, I_E=-20mA, f=100MHz$
Collector output capacitance	C_{ob}	—	3	—	pF	$V_{CB}=10V, I_E=0, f=1MHz$
Collector output capacitance	C_{ib}	—	8	—	pF	$V_{EB}=0.5V, I_E=0, f=1MHz$

(SPEC-C22)

BC848BW / BC848B / BC848C

Transistors

●Packaging specifications

Part No.	BC848BW	BC848B	BC848C
Packaging type	UMT3	SST3	SST3
Marking	G1K	G1K	G1L
Code	T106	T116	T116
Basic ordering unit (pieces)	3000	3000	3000

●Electrical characteristic curves

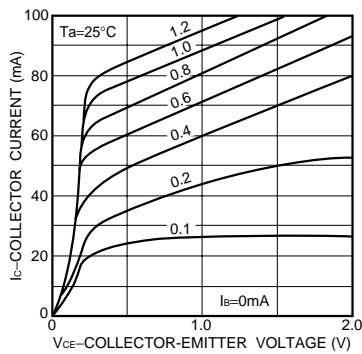


Fig.1 Grounded emitter output characteristics (I)

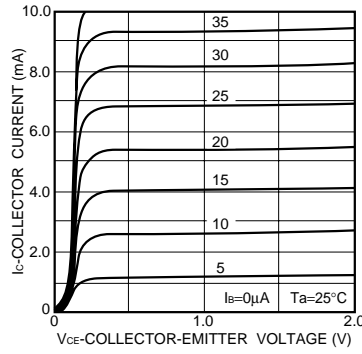


Fig.2 Grounded emitter output characteristics (II)

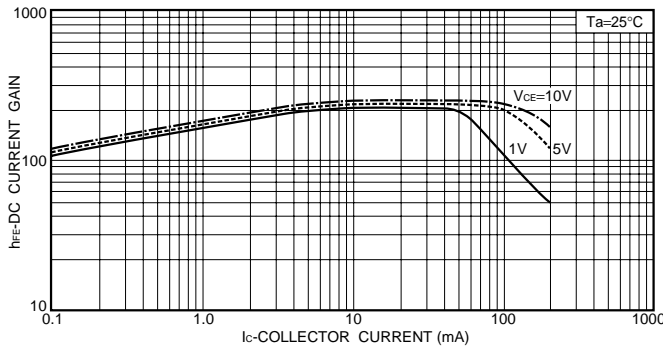


Fig.3 DC current gain vs. collector current (I)

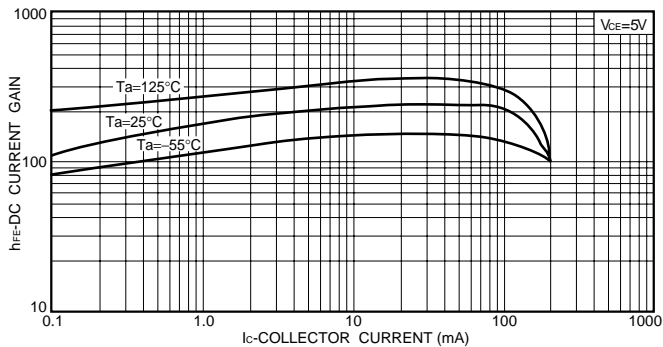


Fig.4 DC current gain vs. collector current (II)

BC848BW / BC848B / BC848C

Transistors

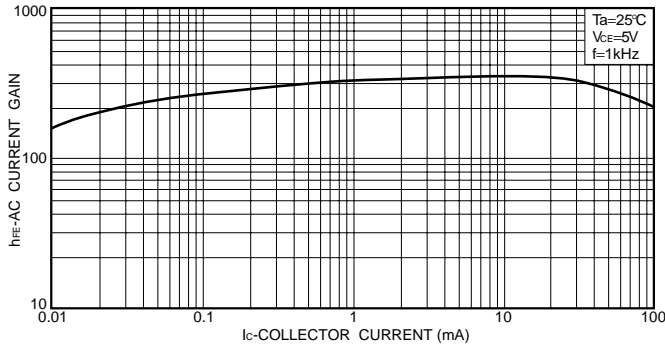


Fig.5 AC current gain vs. collector current

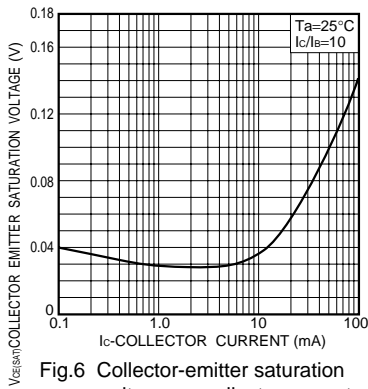


Fig.6 Collector-emitter saturation voltage vs. collector current

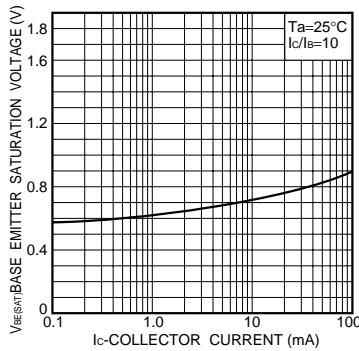


Fig.7 Base-emitter saturation voltage vs. collector current

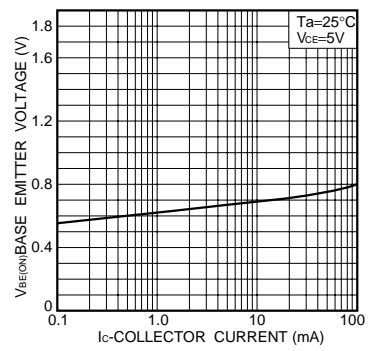


Fig.8 Grounded emitter propagation characteristics

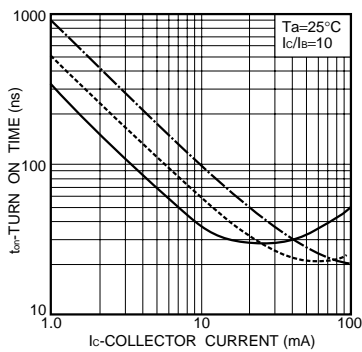


Fig.9 Turn-on time vs. collector current

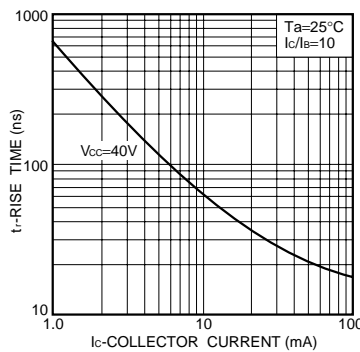


Fig.10 Rise time vs. collector current

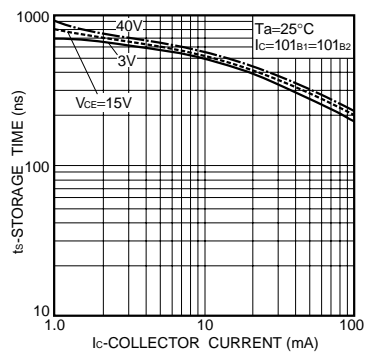


Fig.11 Storage time vs. collector current

BC848BW / BC848B / BC848C

Transistors

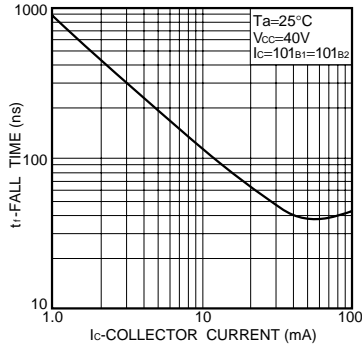


Fig.12 Fall time vs. collector current

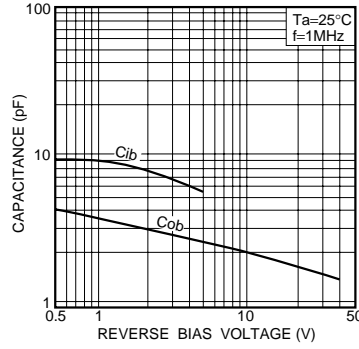


Fig.13 Input/output capacitance vs. voltage

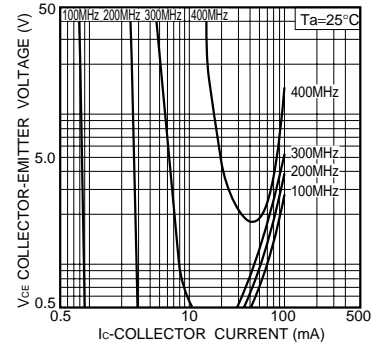


Fig.14 Gain bandwidth product

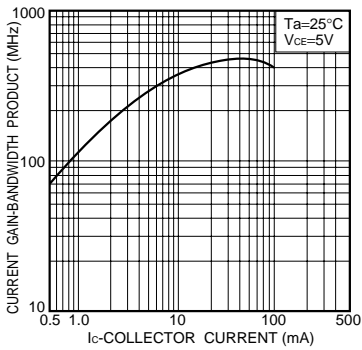


Fig.15 Gain bandwidth product vs. collector current

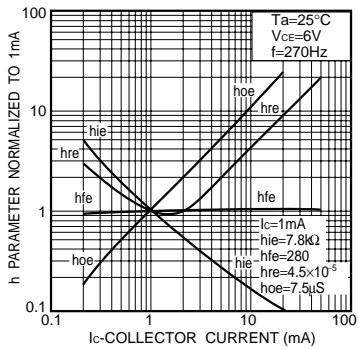


Fig.16 h parameter vs. collector current

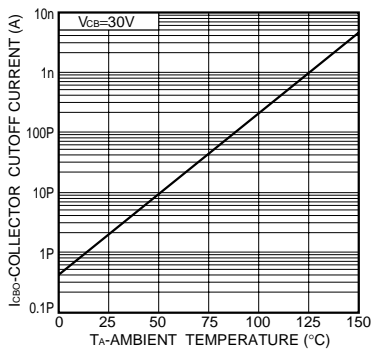


Fig.17 Collector cutoff current

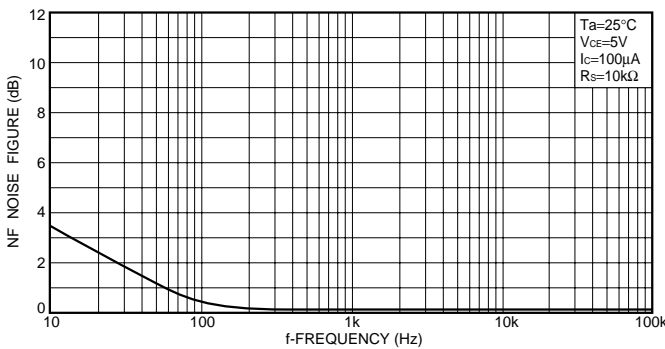


Fig.18 Noise vs. collector current

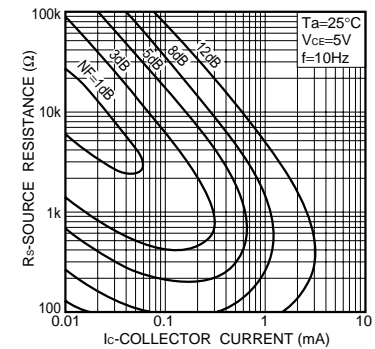


Fig.19 Noise characteristics (I)

BC848BW / BC848B / BC848C

Transistors

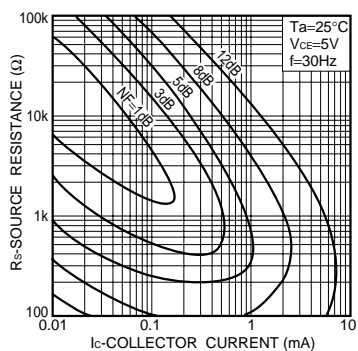


Fig.20 Noise characteristics (II)

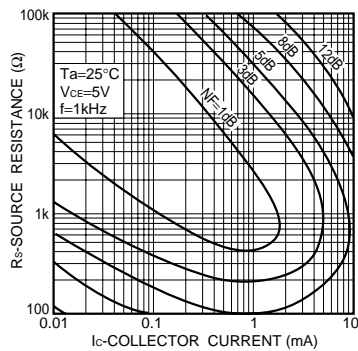


Fig.21 Noise characteristics (III)

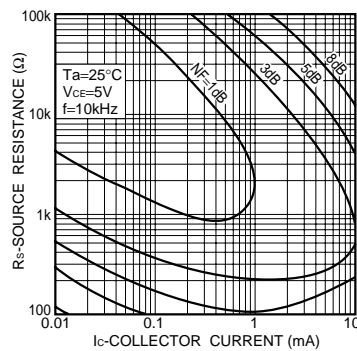


Fig.22 Noise characteristics (IV)