

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Pomona Electronics](#)  
[6745](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

**Video Broadcast Products**

## 75Ω Broadcast connectors and adapters for crystal clear digital video signals

Whether you're working at an event, in a mobile truck, or in the studio, professionals like you need the cleanest, clearest signals for broadcast and production. Transmitting today's digital video signals demands higher bandwidth and greater signal purity than analog signals. Pomona Electronics' new line of 75Ω digital video connectors and adapters help meet these demands. These connectors and adapters are true 75Ω and are designed to minimize Voltage Standing Wave Ratio (VSWR). All are precision-machined from high-quality materials. (See specs below).

### Features

- Made from precision machined high quality brass.
- Machining provides superior fit of connector parts, permitting less signal loss.
- Center contacts are plated with 20 micro inches of gold for better conductivity.
- All connectors and adapters are 75Ω for broadcast applications.

### Material specifications

*Body:* Gold plated brass (push-ons), Machined nickel plated brass (adapters) *Female center contracts:* Gold plated heat treated Beryllium copper for long wear life.

*Insulation Dielectric:* PTFE (adapters).

### General specifications

*Impedance:* 75Ω.

*Frequency:* DC to 3.0 GHz (Applies to 6702, 6703, 6704, 6705).

DC to 1.5 GHz (All other adapters).

*VSWR\*:* 1.3 Max. (Applies to 6702, 6703, 6704, 6705).  
1.5 Max. (All other adapters).

*Contact resistance:* 1.5 mΩ max.

*Insulation resistance:* 5000 MΩ.

*Dielectric withstand voltage:* 1500 Vrms.


*Voltage:* 33 Vrms/70 Vdc (not).

*Voltage:* 500V\*\*.

*Insertions:* 500.

*Cable retention:* 60 lbs.


\*\* Hands free testing in controlled environment. For CE compliance: not intended for handheld use at voltages above 33 Vrms / 70 Vdc.

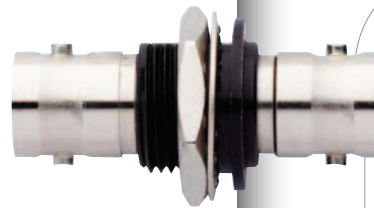

**75Ω Broadcast  
Within Series  
Adapters**




**75Ω Between  
Series Adapters**

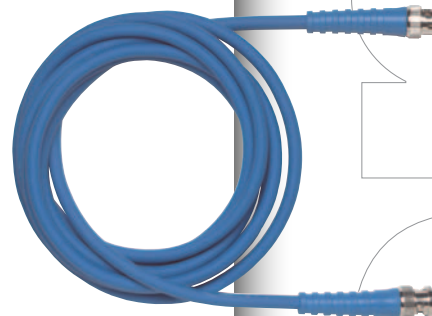

**75Ω Cable  
Assemblies**

See following pages for  
a complete list of video  
broadcast products


## 75Ω Broadcast connectors



BNC Male Terminator Plug  
**3840-75**



BNC (M) for Video Broadcast, RG59/U,  
 (Belden 1855A), 23 AWG  
**6704**



BNC (F/F/F) Adapter, 75Ω  
**6738**



BNC Feed-thru Termination  
**4119-75**



BNC (F/F) Isolated Panel Adapter  
 for Digital Video  
**6705**



BNC (F/M/F) Adapter, 75Ω  
**6739**



BNC 75Ω Attenuator  
**4391-75**




BNC (F) PCB Mount, Dual  
 Right Angle, White Valox  
**6718**




BNC (M/M) Adapter, 75Ω  
**6740**



BNC Shorting Cap  
**5085**




BNC (M) Panel Mount, 75Ω  
**6735**



BNC (F) Bulkhead Receptacle,  
 Isolated Ground, Teflon, 75Ω  
**6741**



BNC (M) for Digital Video, RG59/U,  
 (Belden 1505A), 20 AWG  
**6702**



BNC (F) Panel Receptacle, 75Ω  
**6736**



BNC (F/F) Panel Mount,  
 Hermetically Sealed, 75Ω  
**6744**



BNC (M) for Digital Video, RG6/U,  
 (Belden 1694A), 18 AWG  
**6703**



BNC (F/F) Adapter, 75Ω  
**6737**




BNC (F) Bulkhead Receptacle, 75Ω  
**6745**


## 75Ω Between series adapters



BNC (M) Compression Style, Field inst,  
RG59, 59A, 59B, 62, 210, 75Ω  
**6746A**




BNC (F) PCB Mount, Vertical, 75Ω  
**6747**




BNC (F) PCB Mount, Right Angle, 75Ω  
**6748**



BNC (M) Bulkhead Receptacle, 75Ω  
**6749**



BNC (M) Crimp RG59, 59A, 59B, 62, 210 75Ω  
**6752A**



BNC (F/M/F) Adapter, in-line, 75Ω  
**6754**



BNC (F) to 1/4in Phone Plug  
**1297**



BNC (F) to Two Conductor  
0.14in (3.58mm) Dia. Tini Plug  
**3837**



BNC (M) to 1/4in Two Conductor Phone Jack  
**4043**



BNC (M) to Phono Jack  
**4054**



BNC (F)/Microplug  
**4267**



BNC (F)/Bantam Plug  
**4719**



BNC (F)/.090 Video Plug (Standard Weco)  
**5008**



BNC (F) to Phono Plug  
**5319**



BNC to Mini-weco Plug  
**6519**



BNC (M) / F (F), 75Ω  
**6779**



BNC (F) / F (F), 75Ω  
**6780**




BNC (F) / F (M), 75Ω  
**6781**



BNC (M) / F (M), 75Ω  
**6782**

## 75Ω Cable assemblies

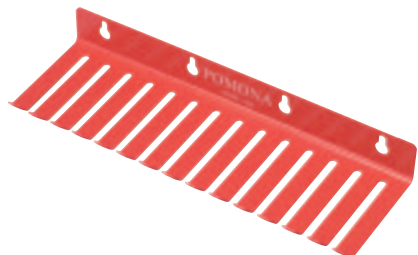

Test Lead Holder for Wires  
 Up to 0.210in (5.33mm) Dia.

**1508**

Test Lead Holder for Wires  
 Up to 0.32in (8.13mm) Dia.

**4408**

Test Lead Holder for Wires  
 Up to 0.450in (11.43mm) Dia.

**2708**



Rugged 75Ω BNC Plug / Plug,  
 3ft to 25ft (0.9m to 7.6m )

**2249-E-36**



Mini-weco Plug / Plug Patch Cord

**6502-96**



75Ω BNC (M) to Mini-weco Cable

**6515-96**



Weco Plug / Plug Patch Cord

**6507-96**



75Ω BNC (M) To Standard Weco Cable

**6516-96**

Go to **[www.pomonaelectronics.com](http://www.pomonaelectronics.com)** for more information

### In the United States:

Pomona Electronics  
 9028 Evergreen Way  
 Everett, WA 98204  
 United States

[www.pomonaelectronics.com](http://www.pomonaelectronics.com)

Tel: 1.800.490.2361  
 Fax: 425.446.5844

### In Europe:

Pomona Electronics  
 P.O.Box 1186  
 5602 BD Eindhoven  
 The Netherlands

[www.pomona.cc](http://www.pomona.cc)

Tel: +31 (0) 40 2675 150  
 Fax: +31 (0) 40 2675 151

### All other areas:

[www.pomonaelectronics.com](http://www.pomonaelectronics.com)

Tel: 1.425.446.5500  
 Fax: 1.425.446.4806

Copyright © 2004. Pomona is a registered trademark of Pomona Electronics. Specifications subject to change without notice. All rights reserved. Printed in the USA. 5/04 2152230 D-ENG-N Rev. A