

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[EPCOS \(TDK\)](#)  
[B39321R733U310](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



# SAW Components

Data Sheet R 733

Data Sheet





## SAW Components

### Resonator

R 733

315,03 MHz

### Data Sheet


Ceramic package QCC8C

#### Features

- 1-port resonator
- Provides reliable, fundamental mode, quartz frequency stabilization i.e. in transmitters or local oscillators

#### Terminals


- Ni, gold plated

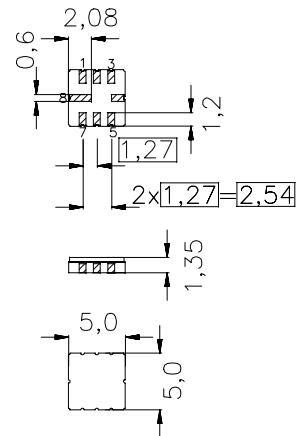

Dimensions in mm, approx. weight 0,1 g

#### Pin configuration

2	Input
6	Output, grounded in 1-port conf.
4,8	Ground (case)
1,3	float
5,7	float / ground

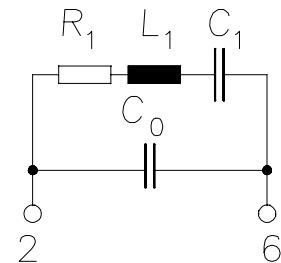

Type	Ordering code	Marking and Package according to	Packing according to
R 733	B39321-R 733-U310	C61157-A7-A56	F61074-V8070-Z000

#### Electrostatic Sensitive Device (ESD)

#### Maximum ratings

Operable temperature range	$T_A$	-45/+120	°C	
Storage temperature range	$T_{stg}$	-45/+120	°C	
DC voltage	$V_{DC}$	12	V	
Source power	$P_s$	0	dBm	between any terminals



SAW Components	R 733
Resonator	315,03 MHz

**Data Sheet****Characteristics**

Reference temperature:  $T_A = 25^\circ\text{C}$   
Terminating source impedance:  $Z_S = 50 \Omega$   
Terminating Load impedance:  $Z_L = 50 \Omega$

		min.	typ.	max.	
<b>Center frequency<sup>1)</sup></b>	$f_c$	314,955	315,03	315,105	MHz
<b>Minimum insertion attenuation</b>	$\alpha_{\min}$	—	1,3	1,9	dB
Unloaded quality factor	$Q_U$	8000	15800	—	
<b>Ageing of <math>f_c</math></b>		—	—	$\pm 50$	ppm
<b>Equivalent circuit elements</b>					
Motional capacitance	$C_1$	—	2,06	—	fF
Motional inductance	$L_1$	—	123,89	—	$\mu\text{H}$
Motional resistance	$R_1$	—	16	23	$\Omega$
Parallel capacitance <sup>2)</sup>	$C_0$	—	2,8	—	pF
<b>Temperature coefficient of frequency<sup>3)</sup></b>	$TC_f$	—	- 0,03	—	ppm/K <sup>2</sup>
<b>Turnover temperature</b>	$T_0$	20	—	40	$^\circ\text{C}$

<sup>1)</sup> Center frequency is defined as maximum of the real part of the admittance

<sup>2)</sup> If used in two port configuration (pin 2-input, pin 6-output)  $C_0$  is reduced by approx. 0,3 pF.

<sup>3)</sup>Temperature dependence of  $f_c$ :  $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$



<b>SAW Components</b>	<b>R 733</b>
<b>Resonator</b>	<b>315,03 MHz</b>
<b>Data Sheet</b>	

**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division, SAW CE AE**  
**P.O. Box 80 17 09, 81617 Munich, GERMANY**

©.EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.