

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Schurter](#)
[4802.2300](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

Data and Signal Plug/Socket

www.schurter.com/PG12_4

4802.2330

Daten & Signal, Socket, 3.5 mm, 3-pole, solder terminals for PCB, insulated

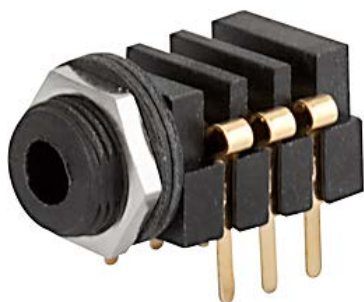

Description

- PCB Mounting:
Screw-on mounting, from rear-side
- Data and Signal transfer
- Data and Signal Connectors 3-pole, insulated, straight
- Reinforced gold plating for increased insertions

References


Alternative: Housing shielded [4802.2320](#)

Technical Data


Diameter	3.5 mm
Number of Poles	3-pole
Ratings DC	1 A / 12 VDC
Ratings AC	1 A / 12 VAC
Dielectric Strength	500VDC
Insulation Resistance	> 10000 MΩ @ 500VDC

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	PCB terminals
Mounting	Screw-on mounting wall thickness max. 2.0mm
Housings	insulated
Style	straight
Lifetime	10000 Insertions

Dimensions

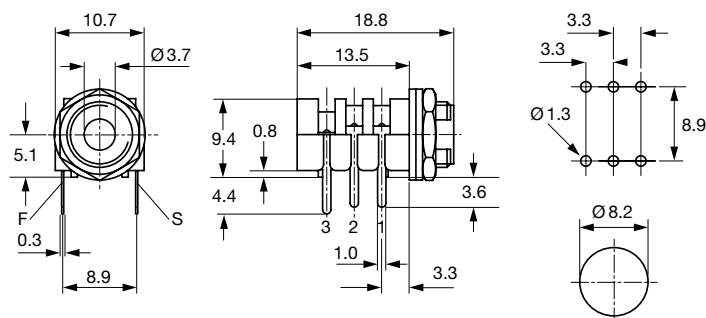

Diagrams



4802.2330

Data and Signal Plug/Socket
www.schurter.com/PG12_4

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Data and Signal Plug/ Sockets	3.5	3-pole	PCB terminals	4802.2330

■ Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs

Mating Inlets/Plugs

Category / Description

[Data and Signal Plug/Socket Overview complete](#)

4802, Plug, solder terminal, screened, 3.5 mm, 3-pole, straight, UK-Connector

[4802.1300](#)

4802, Plug, solder terminal, insulated, 3.5 mm, 3-pole, straight, UK-Connector

[4802.1310](#)[Data and Signal Plug/Socket further types to 4802.2330](#)