

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Schurter](#)
[7093.0110](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Shock-Safe Fuseholder, 6.3 x 32 mm, NF, Fingerrip, IP 68



250 VAC · 3.6W/16A (NF)



Description

- IP 68 from front-side
- Screw type fuse carrier

Standards

- NF C 93-436 - Modell HB14
- Contrôle de Conformité de Qualité (CCQ)

References

General Product Information

Weblinks

Approvals, RoHS, CHINA-RoHS, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check



Technical Data

Fuse-Link	6.3 x 32 mm
Mounting	Panel Mount, Front-Side
Fastening	Fixing Nut
Terminal	Solder
Rated Voltage	250VAC
Rated Current	16A (NF)
Rated Power Acceptance IEC	3.6W / 16A @ Ta 23°C
Degree of Protection	IP 68
Admissible Ambient Air Temp.	-40°C to 125°C
Climatic Category	40/125/56 acc. to IEC 60068-1
Material: Socket	Thermoset, black
Unit Weight (Socket/Cap)	38 g
Storage Conditions	0°C to 60°C, max. 70% r.h.
Product Marking	Type, Voltage Rating, Current Rating

Soldering Methods	Iron
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Dump Heat	acc. to NF C 20-604
Climatic Composite	acc. to NF C 20-619 Phase D
Admissible Torque on Fixing Nut	max 1.2Nm
Panel Thickness s	max 5 mm

Dimensions

Length 54 mm

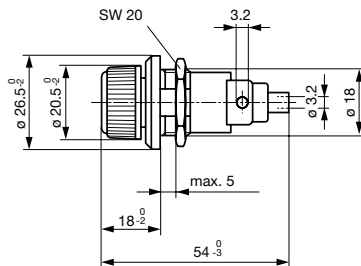

Mounting holes

Variants

Holder	Cap	Degree of Protection	Order Number
●	Fingerrip	IP 68	7093.0110

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Packaging Unit

Bulk (10 pcs.)