

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ON Semiconductor](#)
[SB10-04A3-AT1](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Ordering number:EN3406A



SB10-04A3

Schottky Barrier Diode

40V, 1.0A Rectifier

Applications

- High frequency rectification (switching regulators, converters, choppers).


Features

- Meets the requirements for automatic mounter.
- Low forward voltage (V_F max=0.55V).
- Small capacitance (C typ=45pF).
- Average rectified current (I_O =1.0A).

Package Dimensions

unit:mm

1237

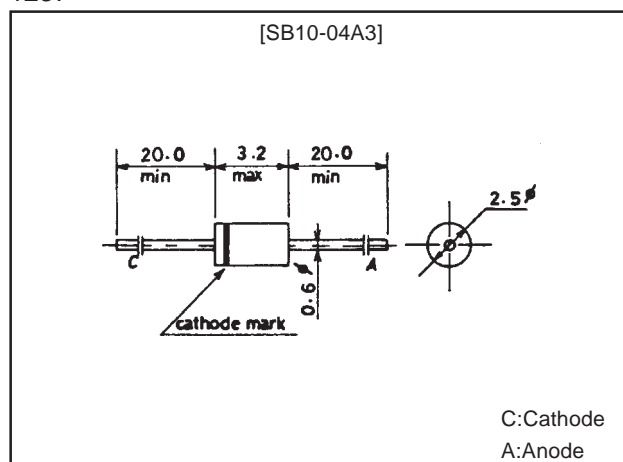

Specifications








Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Repetitive Peak Reverse Voltage	V_{RRM}		40	V
Nonrepetitive Peak Reverse Surge Voltage	V_{RSM}		45	V
Average Output Current	I_O	50Hz, resistive load, sine wave, $T_a=25^\circ\text{C}$ L=5mm, 3mm ϕ print land	1.0	A
Surge Forward Current	I_{FSM}	50Hz sine wave, 1 cycle	30	A
Junction Temperature	T_J		125	$^\circ\text{C}$
Storage Temperature	T_{stg}		-55 to +125	$^\circ\text{C}$

Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Forward Voltage	V_F	$I_F=1.0\text{A}$			0.55	V
Reverse Current	I_R	$V_R=40\text{V}$			0.8	mA
Interterminal Capacitance	C	$V_R=10\text{V}$, $f=1\text{MHz}$		45		pF
Thermal Resistance (junction-Ambient)	$R_{th(j-a)}$	Mounted on PCB			113	$^\circ\text{C/W}$

SB10-04A3

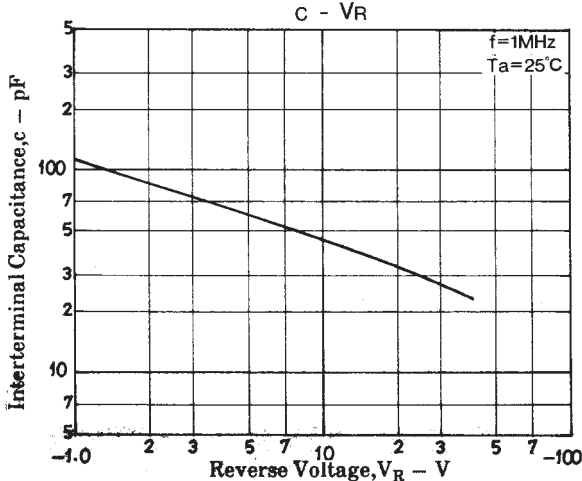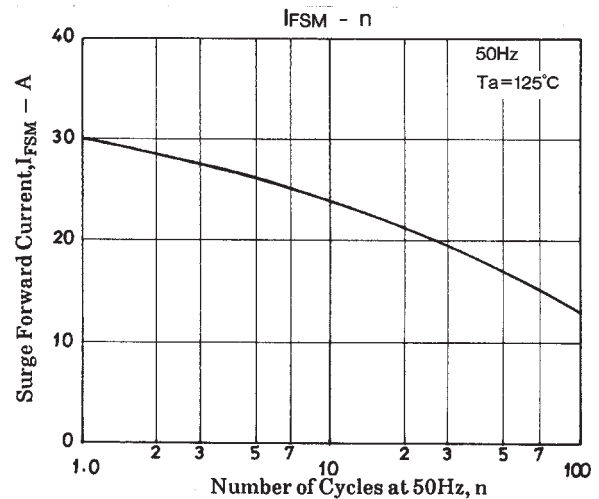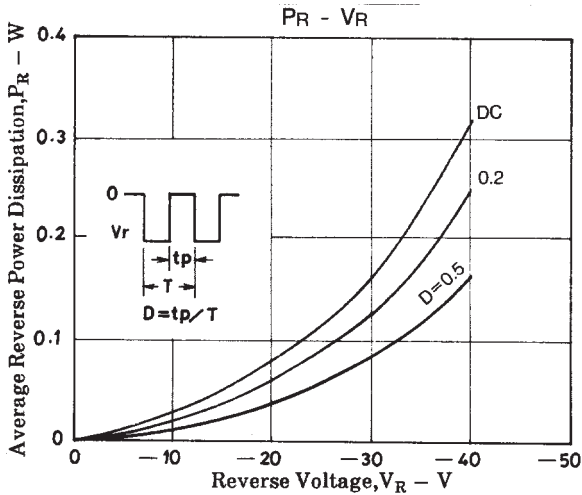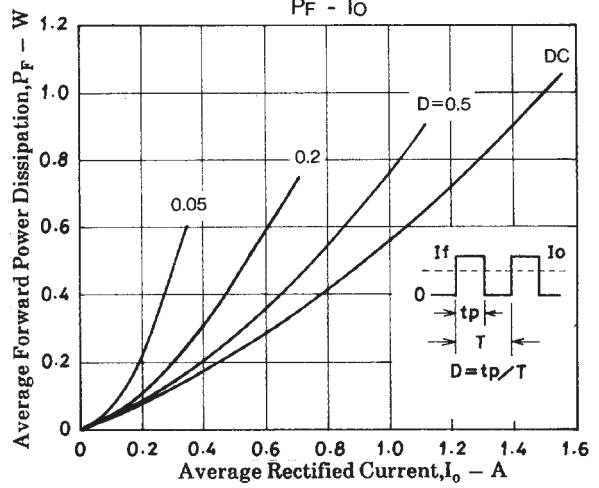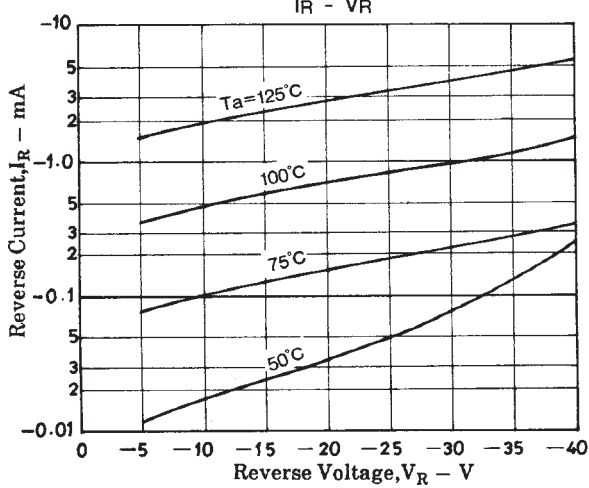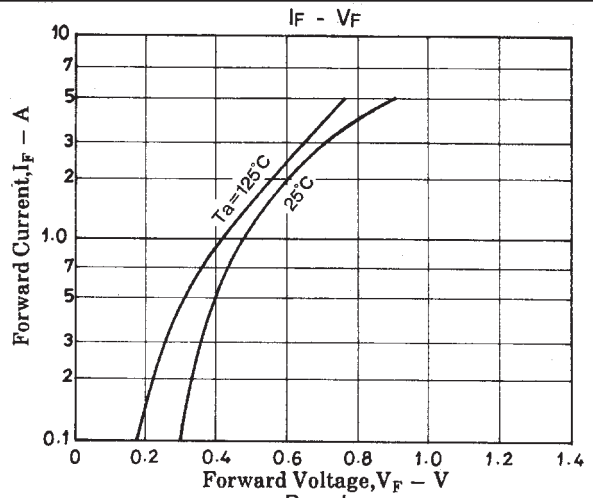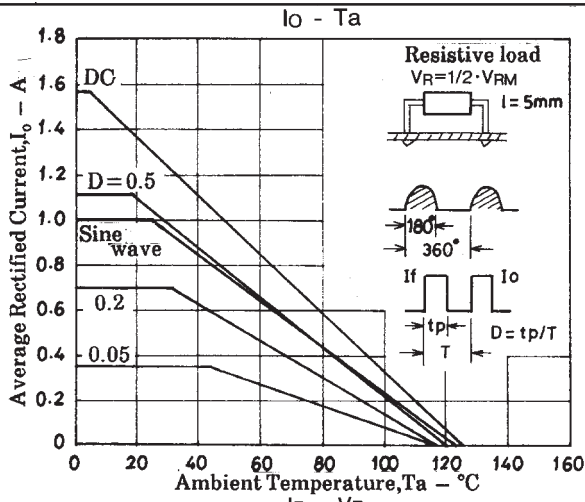

SB10-04A3

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.