

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[PUI Audio, Inc.](#)
[AWT-4703-R](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE (SQUARE WAVE)	12	Vdc
OPERATING VOLTAGE RANGE	1 ~ 30	Vdc
COIL RESISTANCE	24 ± 2	OHM
MINIMUM SPL @ 10 CM	100	dBA
RESONANT FREQUENCY	2,000 ± 20%	Hz
FREQUENCY RANGE	300 ~ 8,000	Hz
OPERATING TEMPERATURE	-40 ~ +85	°C
STORAGE TEMPERATURE	-50 ~ +95	°C
HOUSING MATERIAL	ALUMINUM	-
TERMINAL MATERIAL	Sn PLATED COPPER	-
WEIGHT	28	grams


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.

REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	8/17/2006	
A	REVISED TERMINAL MATERIAL & ADDED DIAPHRAM	10/17/2006	R.W.
B	DELETED INGRESS PROTECTION	1/26/2007	B.R.
C	REVISED FREQUENCY SPECIFICATIONS	4/26/2007	B.R.
D	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	10/18/2007	B.R.

Ø12.4 ^{+0.07}/₋₀ SOUND
EMISSION HOLE


Ø46.5 ± 0.3

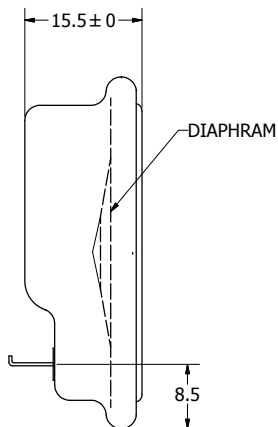

Ø39 ± 0.3

DIAPHRAM

9



NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS.
- SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- THIS PART IS RoHS 2002/95/EC COMPLIANT.
- MAX. OPERATING TEMPERATURE IS 260°C FOR 5 MINUTES.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS,
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.

SIZE
A3

AWT-4703-R.idw

Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date
J.D.	8/18/2006	R.W.	8/18/2006	B.R.	8/18/2006	10/18/2007
 AWT-4703-R						Edition -
Transducer (Electro-Mech)						Sheet 1 / 1