

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phyton Inc.](#)
[AE-P44-I51](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

AE-P44-i51

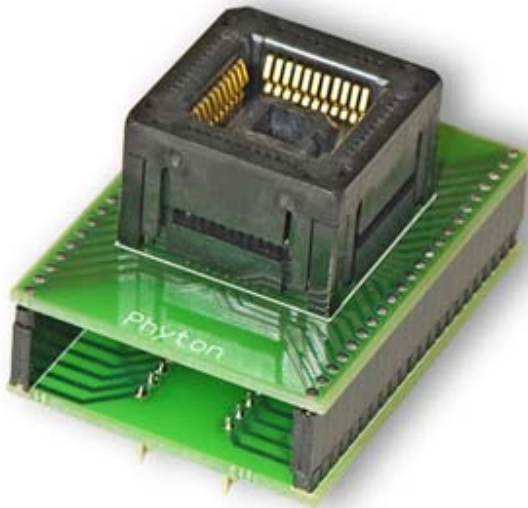

DIP40/PLCC44 specialized adapter for microcontrollers with open top socket.

Click the programmer model below to get an appropriate list of the devices supported by the adapter:

- [ChipProg+](#)
- [ChipProg-40](#)
- [ChipProg-48, ChipProg-G4](#)

Adapter analogues supplied by third-party vendors:

Logical Systems: PA51-44

Adapter Wiring Diagram:

DIP-40	PLCC-44
1	2
2	3
3	4
4	5
5	6
6	7
7	8
8	9
9	10
10	11
11	13
12	14

13	15
14	16
15	17
16	18
17	19
18	20
19	21
20	22
21	24
22	25
23	26
24	27
25	28
26	29
27	30
28	31
29	32
30	33
31	35
32	36
33	37
34	38
35	39
36	40
37	41
38	42
39	43
40	44