

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Dialight](#)
[5151048F](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



3.56mm Round
microLED[®] Optopipe[™]
Optical Light Pipe, 4 Array

Dialight

515-1048

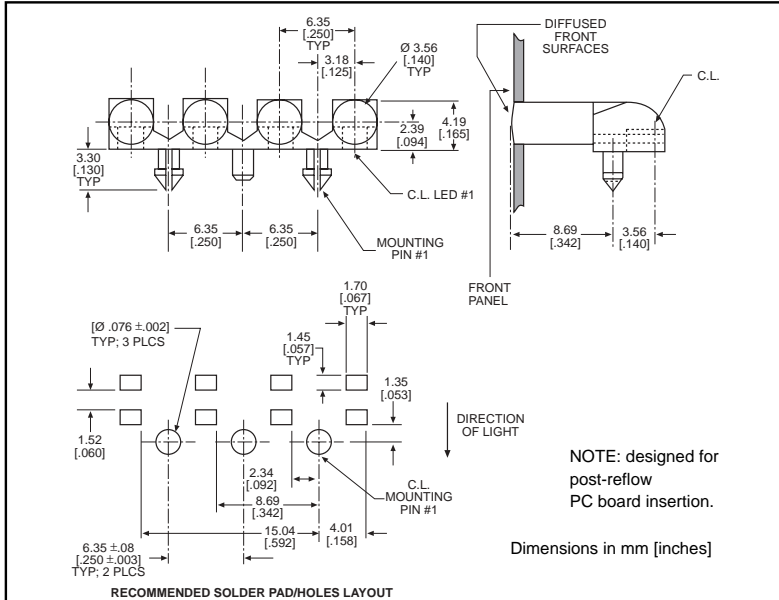

MicroLED SMT LEDs
for use with 515-1048

<u>PART NO.</u>	<u>PAGE #</u>
Recommended	
597-3xx1-4xx	1-27 & 1-28
Alternatives	
597-5x11-4xx	1-27
597-5202-4xx	1-27

2

LED alternatives may not produce optimum light output
 Solder Pad/Holes layout shown is for single color LEDs listed under "Recommended" category
 Contact factory for other layouts

Features

- Snap Pin retention version of Dialight's 515-1020 4 Array Light Pipe
- High transmissivity polycarbonate material
- UL94V-0 compliance
- ESD protection (circuit isolation from front panel)
- Wide viewing angle
- Arrays reduce insertion costs
- Secures to PCB by snap-fit

LED Data

For absolute maximum ratings and other electrical and optical data on the recommended LEDs, refer to LED data sheets.

Operating/Storage Temperature

-30°C to +100°C

Dialight Optopipe Light Pipe Description

This Optopipe's[™] circular light emitting surfaces appear bright and uniform in intensity. It is securely held in place by 2 snap-fit pins and 1 locating pin located between the 4 light pipe elements. This Optopipe[™] functions as a through-the-case indicator with a textured finish on the 4 light emitting surface that increases its viewing angle. The recommended light sources are Dialight's 597 Series 1206 Type SMT LEDs. The LEDs are mounted in a straight line on a 0.250" pitch. The light pipe material is water clear transmissive polycarbonate rated UL94-V0, and has a 35% oxygen index.

Dialight can provide custom Optopipe[™] solutions for your applications.