

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Dialight](#)  
[5151051F](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



**2 x 5mm Rectangular  
*micro*LED<sup>®</sup> Optopipe<sup>™</sup>  
 Optical Light Pipe, 2 Array**

**Dialight**

**515-1051**

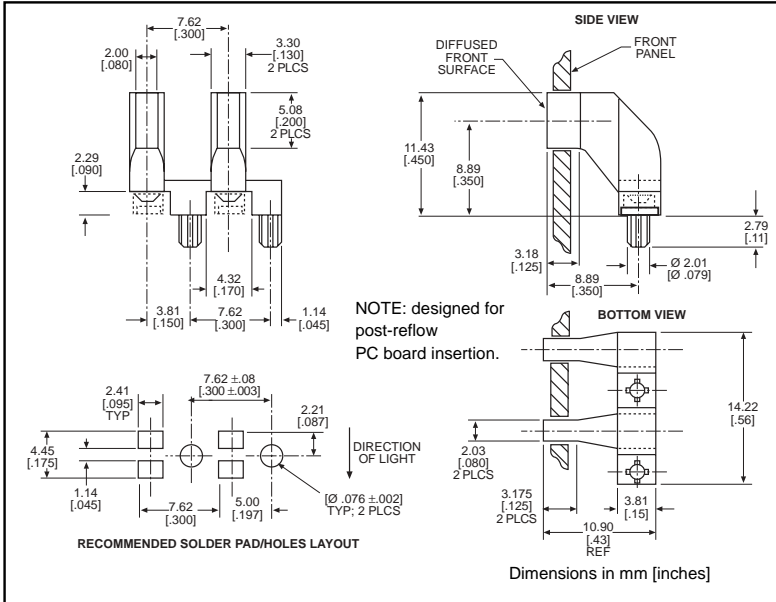

**MicroLED SMT LEDs  
 for use with 515-1051**

PART NO.	PAGE #
<b>Recommended</b>	
597-3xx1-2xx	1-21
597-77x1-2xx	1-23 & 1-24
<b>Alternatives</b>	
597-3xx1-5xx	1-30
597-77x1-5xx	1-31

**2**

LED alternatives may not produce optimum light output  
 Solder Pad/Holes layout shown is for single color LEDs listed under "Recommended" category  
 Contact factory for other layouts

**Features**

- Compatible with Dialight's 515-1054
- High transmissivity polycarbonate material
- UL94V-0 compliance
- ESD protection (circuit isolation from front panel)
- Wide viewing angle
- Arrays reduce insertion costs
- Secures to PCB by press-fit

**LED Data**

For absolute maximum ratings and other electrical and optical data on the recommended LEDs, refer to LED data sheets.

**Operating/Storage Temperature**

-30°C to +100°C

**Dialight Optopipe Light Pipe Description**

This Optopipe<sup>™</sup> functions as a through-the-case indicator with the appearance of dual 2 x 5mm rectangular LEDs. It is held to the PCB by 2 press-fit pins. It can utilize either a single or multi-color SMT LED, and can be used to form longer arrays with the 515-1054 light pipe. The light pipe material is water clear transmissive polycarbonate rated UL94-V0, and has a 35% oxygen index.

Dialight can provide custom Optopipe<sup>™</sup> solutions for your applications.