Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Panasonic Electronic Components AN5276

For any questions, you can email us directly: sales@integrated-circuit.com

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

ICs for Audio Common Use

Panasonic

AN5276

5 W \times 2-ch (19V, 8 Ω) power amplifier with variable audio output and volume control

Overview

The AN5276 is a monolithic integrated circuit designed for 5.0 W (19 V, 8 Ω) output audio power amplifier. It is a dual channel SEPP IC suitable for stereo operation in TV application.


■ Features


- Few external components:
 - No Boucherot cells(output C, R)
 - No Bootstrap Capacitors
 - No Negative Feeback Capacitors
- Built-in muting circuit
- Built-in stand-by circuit
- Built-in various protection circuits (Load-short, thermal, over-voltage and current)
- High ripple rejection(55 dB)
- Compatible with AN5275, AN5277
- Operating voltage range 10 V to 24 V(19 V typ.)

■ Applications

• TV

■ Block Diagram

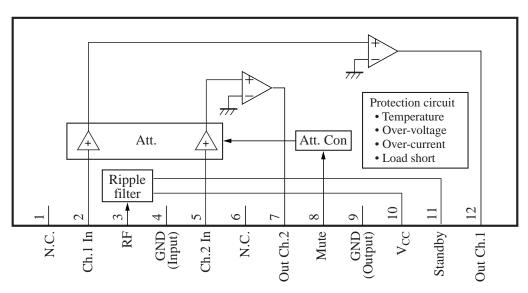

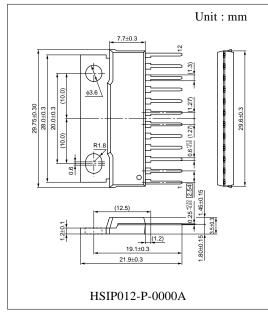

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

AN5276

ICs for Audio Common Use

■ Pin Descriptions

Pin No.	Descriptions	Pin No.	Descriptions
1	N.C.	7	Ch.2 output
2	Ch.1 input	8	Mute
3	Ripple filter	9	Output GND
4	Input GND	10	V _{CC}
5	Ch.2 input	11	Standby
6	N.C	12	Ch.1 output

■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	26.0	V
Supply current	I_{CC}	4.0	A
Power dissipation *2	P_{D}	37.5	W
Operating ambient temperature *1	$T_{ m opr}$	-25 to +75	°C
Storage temperature *1	T _{stg}	-55 to +150	°C

Note) *1: Except these items, all other measurements are taken at T_a = 25 °C.

■ Recommended Operating Range

Parameter	Symbol	Range	Unit
Supply voltage	V_{CC}	10.0 to 24.0	V

^{*2:} $T_a = 75$ °C.

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

ICs for Audio Common Use

AN5276

\blacksquare Electrical Characteristics at $V_{CC}=19~V,\,f=1~kHz,\,R_L=8~\Omega,\,T_a=25~^{\circ}C$

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Quiescent current	I_{CQ}	$V_{IN} = 0 \text{ mV}$	_	35	70	mA
Output end noise voltage *1	V _{NO}	No input, $R_g = 10 \text{ k}\Omega$	_	0.22	0.4	mV
Voltage gain	G_{V}	$V_{IN} = 57 \text{ mV}$	32	34	36	dB
Total harmonic distortion	THD	$V_{IN} = 57 \text{ mV}$	_	0.2	0.4	%
Maximum Output Power	Po	V _{CC} = 22 V, THD = 10 %	5.6	7.0	_	W
Maximum Output power	Po	V _{CC} = 19 V, THD = 10 %	4.0	5.0		W
Ripple rejection ratio *1	RR	$V_r = 1 V_{rms}$	45	55		dB
		$f_r = 120 \text{ Hz}, R_g = 10 \text{ k}\Omega$				
Channel balance	СВ	$V_{IN} = 57 \text{ mV}$	-1.0	0	1.0	dB
Muting Ratio	MR	$V_{IN} = 57 \text{ mV}$	70	80		dB
Muting control voltage	V _{MUTE}	$V_{IN} = 57 \text{ mV}, MR \ge 70 \text{ dB}$	3.0	_	_	V
Standby control voltage 'on'	V _{STD-ON}	No input, $I_{CC} \le 0.1 \text{ mA}$	_	_	5.0	V
Standby control voltage 'off'	V _{STD-OFF}	No input, I _{CC} ≥ 17 mA	8.5	_	_	V
Channel crosstalk	СТ	$V_{\rm IN} = 57$ mV, $R_g = 10$ k Ω	50	60		dB

Note) *1: For this measurement, use the 20 Hz to 20 kHz (12 dB/OCT) filter.

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

AN5276

ICs for Audio Common Use

■ Terminal Equivalent Circuits

Pin No.	Equivalent circuit	Description	DC voltage (V)
1	_	Not connected	_
2	$2 \frac{200 \Omega}{30 k\Omega}$	Ch.1 input This is the amplifier input pin.	0
3	30 kΩ 30 kΩ 30 kΩ 30 kΩ 4	Ripple filter This is the pin to connect the positive terminal of a ripple filter capactior.	V _{CC} -1.5V _{BE}
4	_	Input GND Input ground pin	0
5	5 200 Ω 400 Ω 30 kΩ	Ch.2 input This is the amplifier input pin.	_
6		Not connected	_

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

ICs for Audio Common Use

AN5276

■ Terminal Equivalent Circuits (continued)

Pin No.	Equivalent circuit	Description	DC voltage (V)
7	Pre amp. Driver Cct 7 $V_{CC/2}$ $30 \text{ k}\Omega$	Ch.2 output Ch.2 output pin	V _{CC} /2
8	$\begin{array}{c} 3 \ k\Omega \\ \hline \\ 8 \ 200 \ \Omega \end{array}$	Mute input pin. Mute 'on' = 5 V Mute 'off' = 0 V	_
9	_	Output GND Ch.1 & Ch.2 output ground.	0
10	_	V_{CC} This is the power supply pin.	19 V(typ.)

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

AN5276

ICs for Audio Common Use

■ Terminal Equivalent Circuits (continued)


Pin No.	Equivalent circuit	Description	DC voltage (V)
11	$\begin{array}{c} 10 \\ \hline 1 \\ \hline 5 \\ k\Omega \\ \hline 5 \\ k\Omega \\ \hline \end{array}$	Standby This is the standby control pin.	_
12	Pre amp. 10 600Ω $30 k\Omega$	Ch.1 output Ch.1 output pin	V _{CC} /2

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

ICs for Audio Common Use

AN5276

■ Application Circuit Example

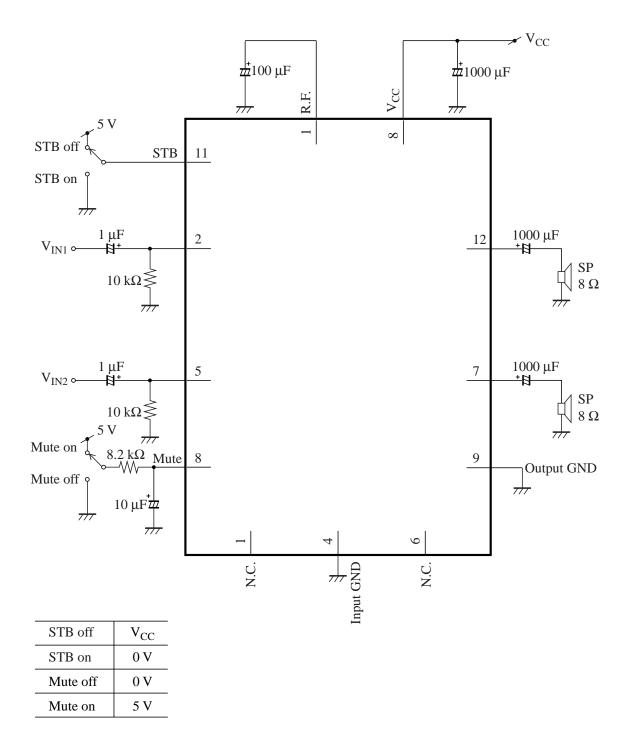

■ Usage Notes


- 1) External heatsink is needed when used. External heatsink should be fixed to the chassis.
- 2) Fin of the IC can be connected to GND.
- 3) Please prevent output to V_{CC} short and output to GND short.
- 4) The temperature protection circuit will operate at T_j around 150 °C. However, if temperature decreass, the protection circuit would automatically be deactivated and resume normal operation.

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

AN5276

ICs for Audio Common Use

- Technical Information
- P_D T_a curves of HSI P012-P-0000A

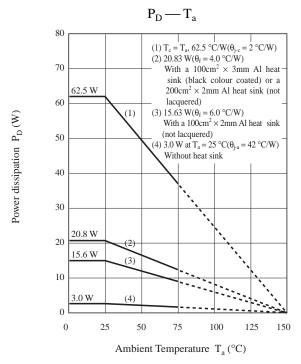

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuit examples of the products. It does not constitute the warranting of industrial property, the granting of relative rights, or the granting of any license.
- (3) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
 - Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this material are subject to change without notice for reasons of modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment. Even when the products are used within the guaranteed values, redundant design is recommended, so that such equipment may not violate relevant laws or regulations because of the function of our products.
- (6) When using products for which dry packing is required, observe the conditions (including shelf life and after-unpacking standby time) agreed upon when specification sheets are individually exchanged.
- (7) No part of this material may be reprinted or reproduced by any means without written permission from our company.

Please read the following notes before using the datasheets

- A. These materials are intended as a reference to assist customers with the selection of Panasonic semiconductor products best suited to their applications.
 - Due to modification or other reasons, any information contained in this material, such as available product types, technical data, and so on, is subject to change without notice.
 - Customers are advised to contact our semiconductor sales office and obtain the latest information before starting precise technical research and/or purchasing activities.
- B. Panasonic is endeavoring to continually improve the quality and reliability of these materials but there is always the possibility that further rectifications will be required in the future. Therefore, Panasonic will not assume any liability for any damages arising from any errors etc. that may appear in this material.
- C. These materials are solely intended for a customer's individual use.

 Therefore, without the prior written approval of Panasonic, any other use such as reproducing, selling, or distributing this material to a third party, via the Internet or in any other way, is prohibited.