

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[Pulse Electronics Corporation](#)
[E5564-80A012-L](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

D1RFRD006

ADD PART NO.		CYC	WLD	REVISION RECORD				
ADD PART NO.	ADD PART NO.	04/06/05	7/28/04	REV	ECO	DESCRIPTION	DRFT	CHKD
		08/06/04	03/27/03			ADD DIM	7/27/99	
			08/21/04			3.30±0.3 wvs 3.80±0.51	7/27/99	
			12/28/04			PART NO. MODIFY	7/14/99	
						ADD CAV. NO.	7/28/99	

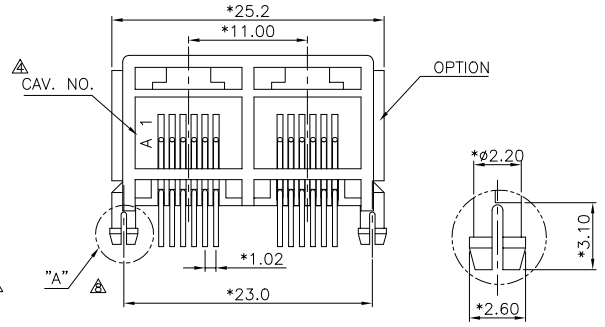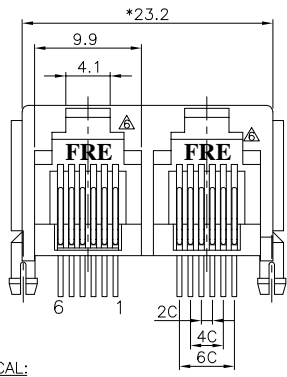

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : G.F. POLYESTER OR HIGH TEMP. UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

CUL FILE NO. E163191

△ PART NUMBER: E556X-80AXXX

- 2- 2C
- 4- 4C
- 6- 6C
- 0- A06-0100 BK.
- 1- A06-0110 GY.
- 4- A05-0040 BK.
- △ 6- A05-0160 BK.
- △ W- A06-1550 GREEN
- 1- 3u" 2- 6u" 3- 15u"
- 4- 30u" 5- 50u" F-Gold flash
- 1-W/ PANEL STOP W/FRE LOGO
- 2-W/O PANEL STOP W/FRE LOGO
- △ L-W/ PANEL STOP W/OFRE LOGO

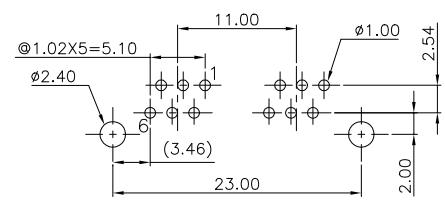

PC Board Layout Component Side Shown

MM (INCH)		DFTD SYZ	DATE 06/06/99	FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD	DATE	TITLE	
		WFO	DATE	L/P DUAL PORTS 6P	
		APPL XLF	DATE 06/10/05	DRAWING NO. GE553016	
		MATERIAL :		SIZE REV	
		QTY :		A3 12	
		FINISH :		DO NOT SCALE DRAWING	
		SCALE : 3:1		SHEET X OF Y	

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1