

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Rohm Semiconductor](#)
[2N4401T93](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SST4401 / MMST4401 / 2N4401

Transistors

NPN Medium Power Transistor (Switching)

SST4401 / MMST4401 / 2N4401

●Features

- 1) $BV_{CEO} > 40V$ ($I_C = 1mA$)
- 2) Complements the SST4403 / MMST4403 / PN4403.

●Package, marking, and packaging specifications


Part No.	SST4401	MMST4401	2N4401
Packaging type	SST3	SMT3	TO-92
Marking	R2X	R2X	—
Code	T116	T146	T93
Basic ordering unit (pieces)	3000	3000	3000

●Absolute maximum ratings ($T_a = 25^\circ C$)

Parameter		Symbol	Limits	Unit
Collector-base voltage		V_{CBO}	60	V
Collector-emitter voltage		V_{CEO}	40	V
Emitter-base voltage		V_{EBO}	6	V
Collector current		I_C	0.6	A
Collector power dissipation	SST4401 MMST4401	P_C	0.2	W
	SST4401 MMST4401		0.35	W
	2N4401		0.625	°C
Junction temperature		T_J	150	°C
Storage temperature		T_{stg}	-55 to +150	

* Mounted on a 7×5×0.6mm CERAMIC SUBSTRATE

●External dimensions (Unit : mm)

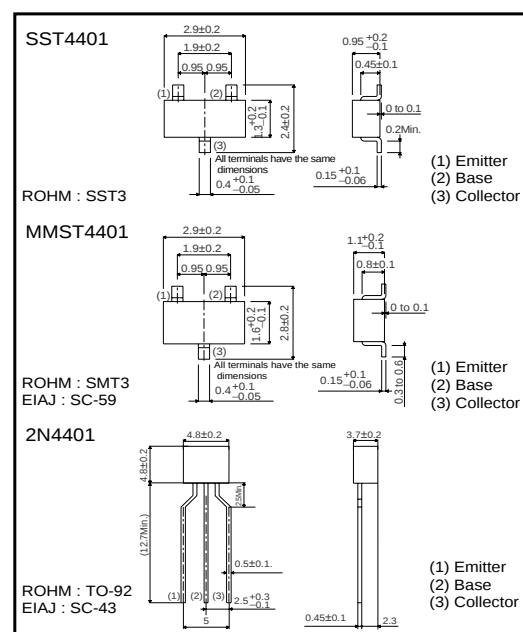

●Electrical characteristics ($T_a = 25^\circ C$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV_{CB0}	60	—	—	V	$I_C = 100\mu A$
Collector-emitter breakdown voltage	BV_{CE0}	40	—	—	V	$I_C = 1mA$
Emitter-base breakdown voltage	BV_{EB0}	6	—	—	V	$I_E = 100\mu A$
Collector cutoff current	I_{C0}	—	—	0.1	μA	$V_{CB} = 35V$
Emitter cutoff current	I_{E0}	—	—	0.1	μA	$V_{EB} = 5V$
Collector-emitter saturation voltage	$V_{CE(sat)}$	—	—	0.4	V	$I_C/I_E = 150mA/15mA$
		—	—	0.75	V	$I_C/I_E = 500mA/50mA$
Base-emitter saturation voltage	$V_{BE(sat)}$	—	—	0.95	V	$I_C/I_E = 150mA/15mA$
		—	—	1.2	V	$I_C/I_E = 500mA/50mA$
DC current transfer ratio	h_{FE}	20	—	—	—	$V_{CE} = 1V, I_C = 0.1mA$
		40	—	—	—	$V_{CE} = 1V, I_C = 1mA$
		80	—	—	—	$V_{CE} = 1V, I_C = 10mA$
		100	—	300	—	$V_{CE} = 1V, I_C = 150mA$
		40	—	—	—	$V_{CE} = 2V, I_C = 500mA$
Transition frequency	f_T	250	—	—	MHz	$V_{CE} = 10V, I_E = -20mA, f = 100MHz$
Collector output capacitance	C_{ob}	—	—	6.5	pF	$V_{CB} = 10V, f = 100kHz$
Emitter input capacitance	C_{ib}	—	—	30	pF	$V_{EB} = 0.5V, f = 100kHz$
Delay time	t_d	—	—	15	ns	$V_{CC} = 30V, V_{EB(OFF)} = 2V, I_C = 150mA, I_{B1} = 15mA$
Rise time	t_r	—	—	20	ns	$V_{CC} = 30V, V_{EB(OFF)} = 2V, I_C = 150mA, I_{B1} = 15mA$
Storage time	t_{stg}	—	—	225	ns	$V_{CC} = 30V, I_C = 150mA, I_{B1} = -I_{B2} = 15mA$
Fall time	t_f	—	—	30	ns	$V_{CC} = 30V, I_C = 150mA, I_{B1} = -I_{B2} = 15mA$

SST4401 / MMST4401 / 2N4401

Transistors

●Electrical characteristic curves

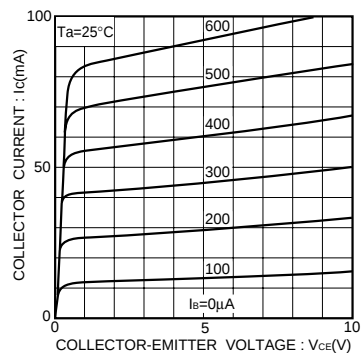


Fig.1 Grounded emitter output characteristics

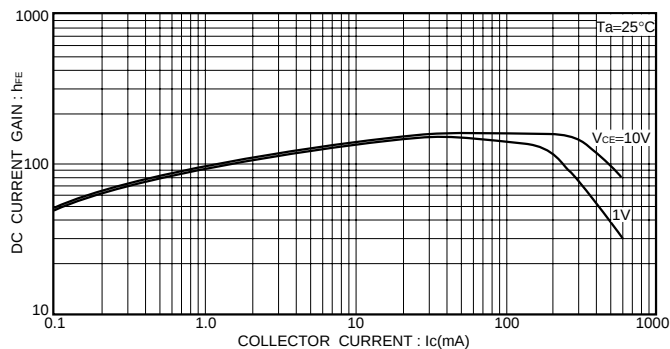


Fig.3 DC current gain vs. collector current(I)

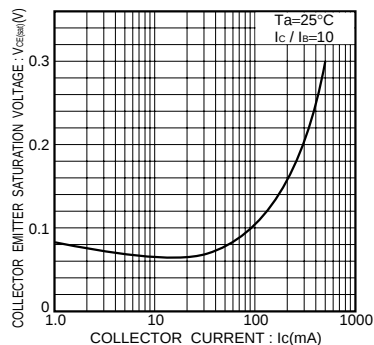


Fig.2 Collector-emitter saturation voltage vs. collector current

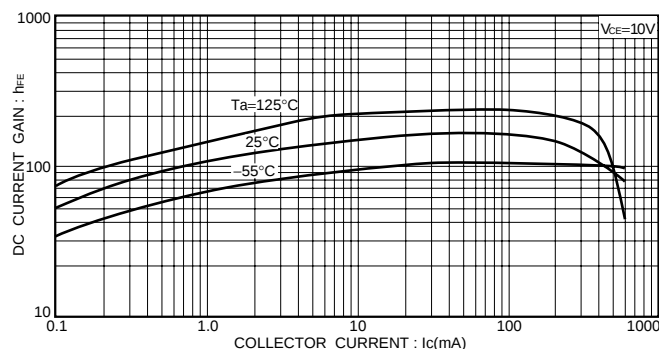


Fig.4 DC current gain vs. collector current(II)

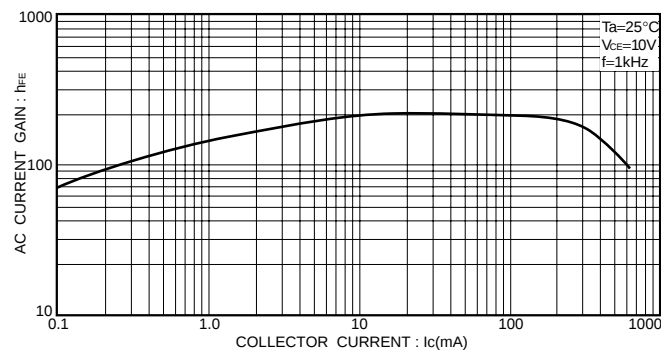


Fig.5 AC current gain vs. collector current

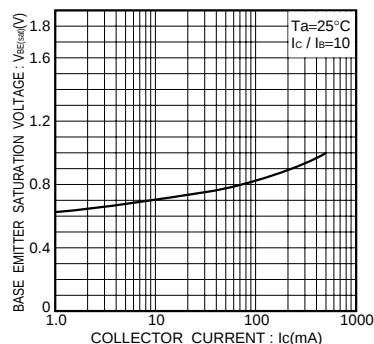


Fig.6 Base-emitter saturation voltage vs. collector current

SST4401 / MMST4401 / 2N4401

Transistors

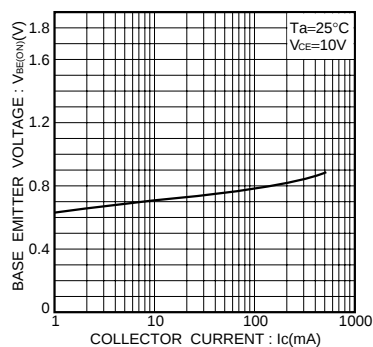


Fig.7 Grounded emitter propagation characteristics

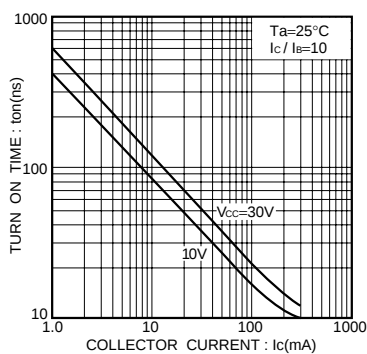


Fig.8 Turn-on time vs. collector current

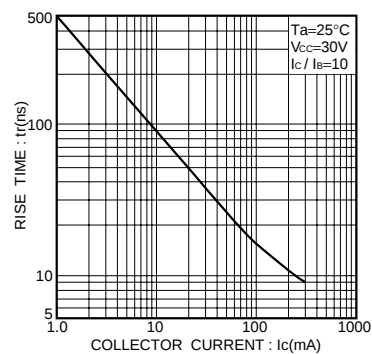


Fig.9 Rise time vs. collector current

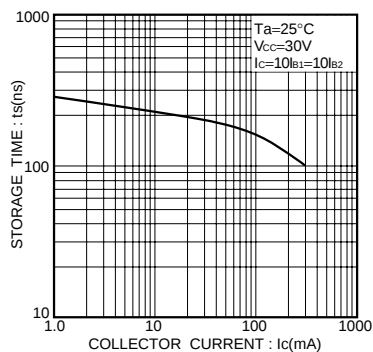


Fig.10 Storage time vs. collector current

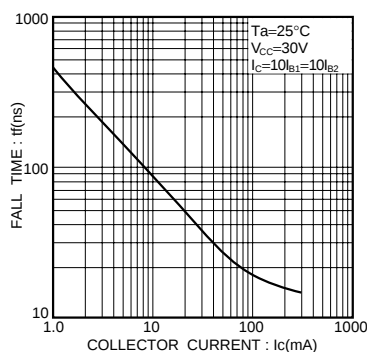


Fig.11 Fall time vs. collector current

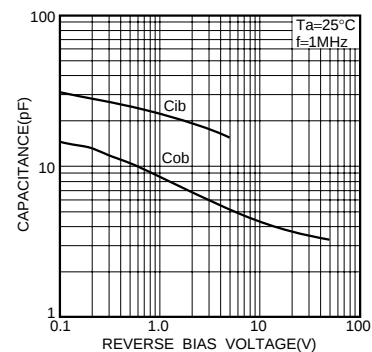


Fig.12 Input / output capacitance vs. voltage

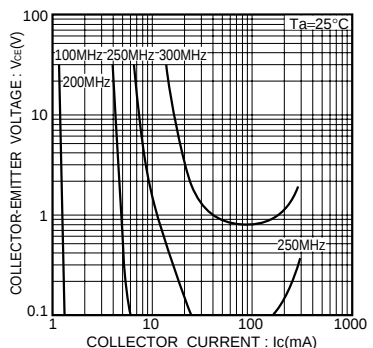


Fig.13 Gain bandwidth product

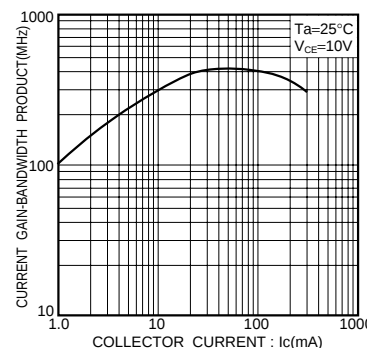


Fig.14 Gain bandwidth product vs. collector current

Appendix

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.