

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Pulse Electronics Corporation](#)
[E5964-5DG132-L](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

A1RFRD10


REVISION RECORD				
REV	ECC	DESCRIPTION	DRFT	CHKD

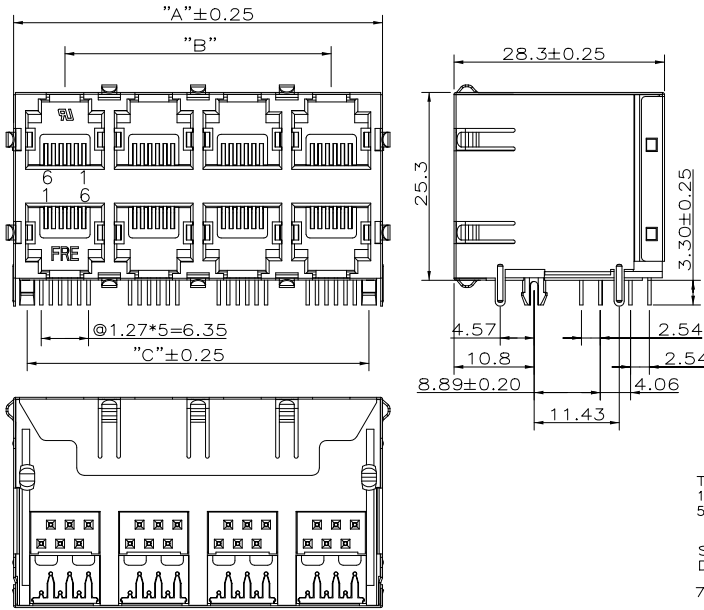

NOTES:

- ELECTRICAL:**
- VOLTAGE RATING : 125 VAC RMS.
 - CURRENT RATING : 1.5 AMP.
 - CONTACT RESISTANCE : 50 MILLIOHMS MAX.
 - INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
 - DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
- MECHANICAL:**
- HOUSING MATERIAL : NYLON+30%G.F(FR52) UL94V-0.
 - CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
 - PLATING : GOLD PLATING OVER NICKEL.
 - OPERATING LIFE : 750 CYCLES MIN.
 - PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - PCB RETENTION POST-SOLDER : 10 LBS MIN.
- ENVIRONMENTAL:**
- STORAGE: -40°C TO +85°C.
 - OPERATION: 0°C TO 70°C.
 - WAVE SOLDERING TEMPERATURE : 255~265°C (5~10 SECONDS)
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
- PART NUMBER: E596X-XXX13X-L
- Gold Thickness:
1-3u" 2-6u" 3-15u"
4-30u" 5-50u" 6-Pd20u"
- Tab:
1-W/O Tab
5-W/ Top & Side & Bottom tabs
- Ports
A-2x2 C-2x4 D-2x5
E-2x6 G-2x8
- Shield:
D-Nickel Plated With Tinned Grounding Peg
7- Nickel

DIM	PORT	2x2	2x4	2x5	2x6	2x8
"A" ±0.25		25.74	49.61	61.55	73.49	97.37
"B"		11.938	35.814	47.752	59.690	83.566
"C" ±0.25		22.10	45.97	57.91	69.85	93.73

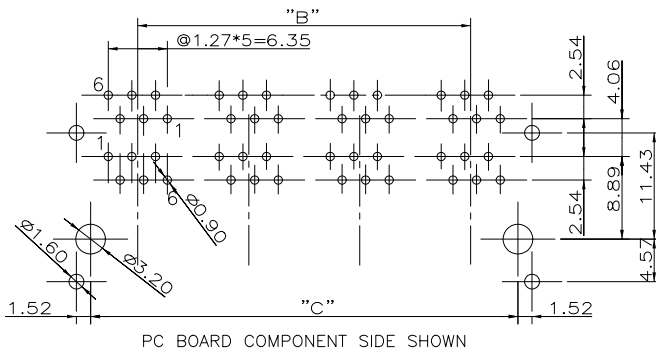

← MM →		DFTO QIANDU DATE 5/24/05'	FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED	CHMD YICAN DATE 2005/5/24	MFD DATE	TITLE RJ11 STACKED PCB GANG JACK	
.0 ± 0.2	APPLV.SAMMY DATE 2005/5/24	MATERIAL :		
.00 ± 0.15		QTY :	DRAWING NO. GE593A69-LA	SIZE A3
.000 ± 0.075		FINISH :	/PART NO. SEE NOTE	REV 0
ANGLES ± 0.5		SCALE : 2:1	DO NOT SCALE DRAWING	SHEET 1 OF 1
THIRD ANGLE PROJECTION				

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1