

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[Pulse Electronics Corporation](#)

[E5J88-00AJG2-L](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
7		P/N MODIFY	Jake	12/07/04
6		P/N MODIFY	Jake	12/10/04
5		DIMENSION MODIFY	Aaron	06/08/05

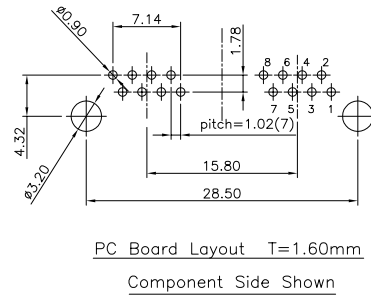

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
- OPERATING: 750 CYCLES MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON+30%.G.F(FR52) UL94V-0.COLOR-BLACK.
- INSERT MATERIAL : NYLON+30%.G.F(FR52) UL94V-0.COLOR-BLACK.
- BACK PLATE MATERIAL : NYLON+30%.G.F(FR52) UL94V-0.COLOR-BLACK.
- CONTACT MATERIAL : PHOSPHOR BRONZE 0.35mm THICKNESS OR $\phi 0.46$ mm.
- PLATING : GOLD PLATING OVER NICKEL.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERRATURE: 255~265°C (5~10 SECONDS)

MATES WITH MODULAR PLUG CONFORMING TO
 FCC PART 68, SUBPART F.
 CUL FILE NO. E163191

△ PART NUMBER: E5J88- 0 0 A J X X-L △

G-STAMPED PIN. _____ PLATING:1-3u"
 H-ROUND PIN _____ 2-6u"
 3-15u"
 4-30u"
 5-50u"

MM (INCH)		DFTD Jake	DATE 05/05/04	FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD Chi	DATE 08/08/05		
MM		MFO Tzou	DATE 08/08/05	TITLE ROHS LED GANG JACK 2 PORTS	
±0.20	±	APPLV Yuan	DATE 08/08/05		
±0.15	±	MATERIAL :		DRAWING NO. GE5J3138	
±0.075	±	MATERIAL :			
ANGLES ±		QTY :		SIZE A3	
THIRD ANGLE PROJECTION		FINISH :		REV 3	
SCALE : 50:19		DO NOT SCALE DRAWING		SHEET 1 OF 1	

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1