

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[E-Switch](#)
[1003P4T7B13M1QE](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

SHEET 1 OF 1

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
2-3, 5-6, 8-9	OPEN	2-1, 5-4, 8-7

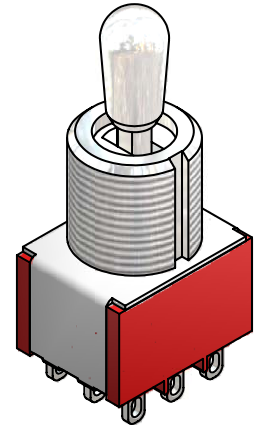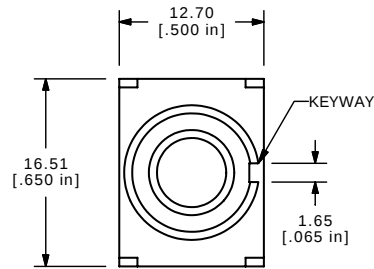



ISOMETRIC



CIRCUIT: 3PDT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERMINAL NUMBERS FOR REFERENCE ONLY
4. PLATING MATERIAL: SILVER
- ▲ 5. RATING: 5 AMP W/RESISTIVE LOAD @ 120VAC OR 28VDC
2 AMPS 2/RESISTIVE LOAD @ 250VAC
6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT

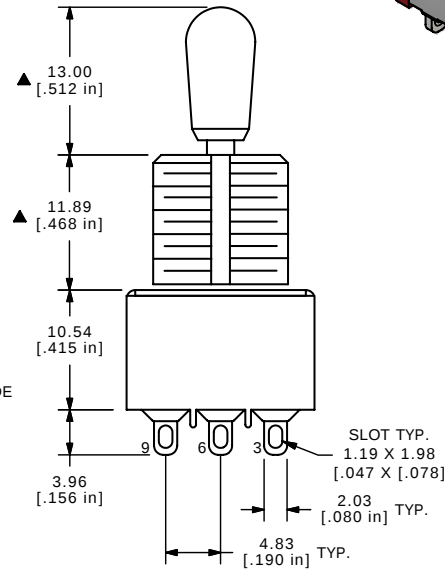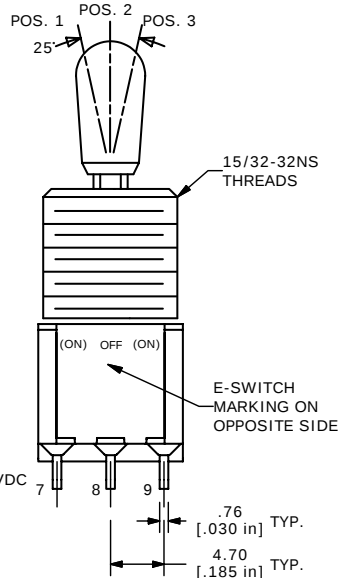

B	17059	FIXED TERMINAL NUMBERS, NOTES	3/5/07	TN
A	13709	RELEASED FOR PRODUCTION	1/13/04	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE 1003P4T7B13M1QE

SCALE 2:1	DATE 3/5/2007	DR TN	DWG T134006	REV B
-----------	---------------	-------	-------------	-------