

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)  
[1004P6T9B1M7RE](#)

For any questions, you can email us directly:





[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

SHEET 1 OF 1

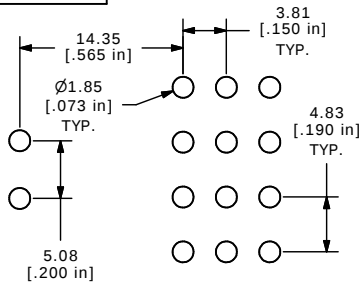


P.C. MOUNTING

| SWITCH FUNCTION         |                         |                         |
|-------------------------|-------------------------|-------------------------|
| POS. 1                  | POS. 2                  | POS. 3                  |
|                         |                         |                         |
| ON                      | ON                      | ON                      |
| 2-3, 5-6,<br>8-9, 11-12 | 2-3, 5-4,<br>8-9, 11-10 | 2-1, 5-4,<br>8-7, 11-10 |

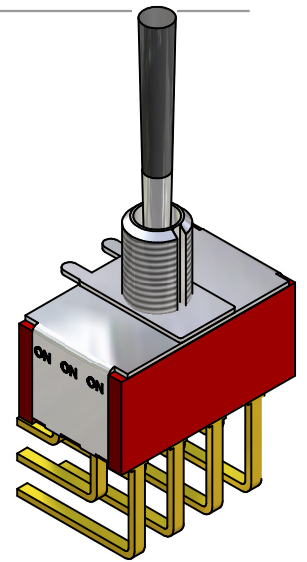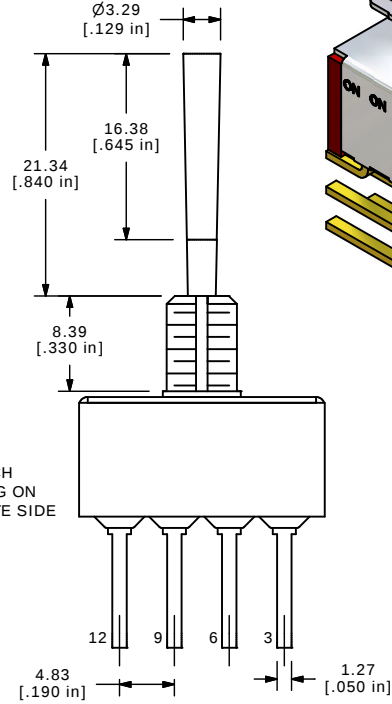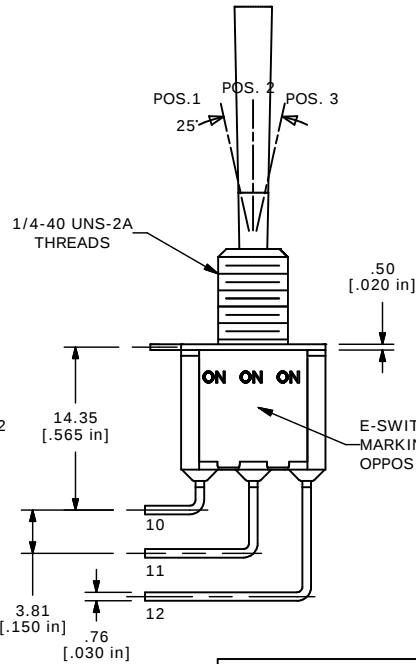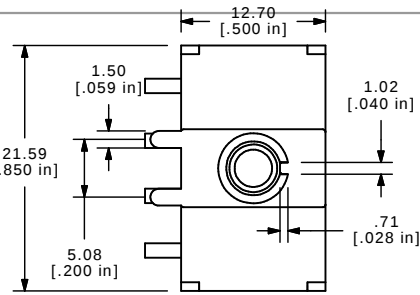

ISOMETRIC

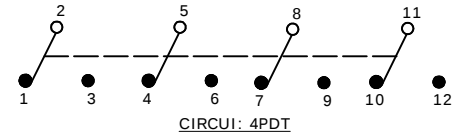

CIRCUIT: 4PDT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. PLATING MATERIAL: GOLD
5. RATING: 0.4 (VA) Max. @20V Max.
6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

**E-SWITCH®**

|     |        |                         |         |    |
|-----|--------|-------------------------|---------|----|
| A   | 14239  | RELEASED FOR PRODUCTION | 8/17/04 | AR |
| REV | PCR NO | DESCRIPTION             | DATE    | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 1004P6T9B1M7RE

SCALE 2:1

DATE 8/17/04

DR AR

DWG T146011

REV A