

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)
[100AWSP2T1B4M6RE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

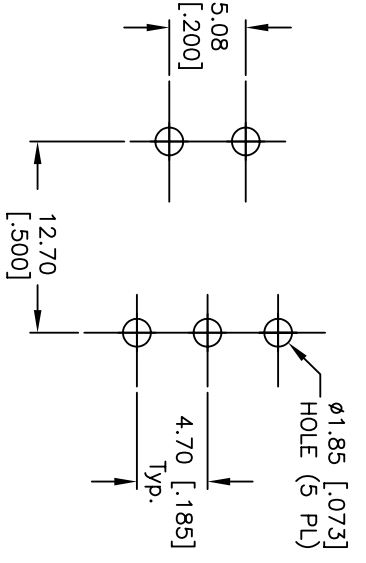



RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPDT CONTACT CONFIGURATION



SWITCH FUNCTION	PDS. 1	PDS. 2	PDS. 3
DN			
OPEN			
	2-3	2-3	2-1

(<) = MOMENTARY

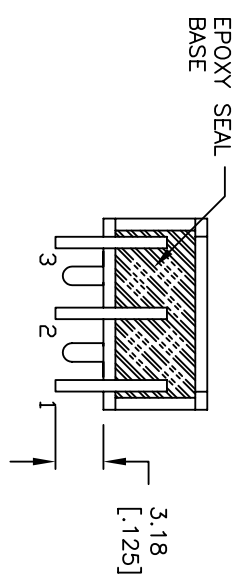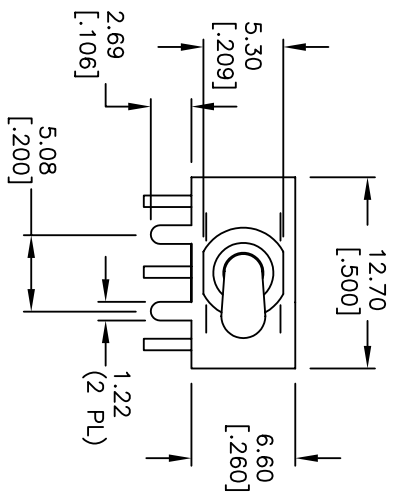

REAR VIEW

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 0.4(VA) Max. @20V (AC or DC)
 5. FIXED TERM. & MOVING CONTACT: COPPER ALLOY PLATE over NI Plate W/Gold
 6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
 7. INSULATION RESISTANCE: 1,000M ohm min.
 8. DIELECTRIC STRENGTH: 1,000V RMS @sea level.
 9. OPERATING TEMP.: -30°C to +85°C.
 10. ▲ DENOTES CRITICAL PARAMETER
 11. 2002/95/EC (ROHS) COMPLIANT

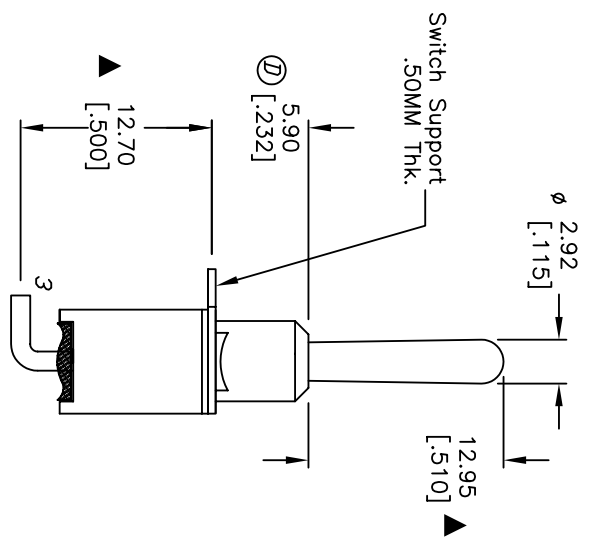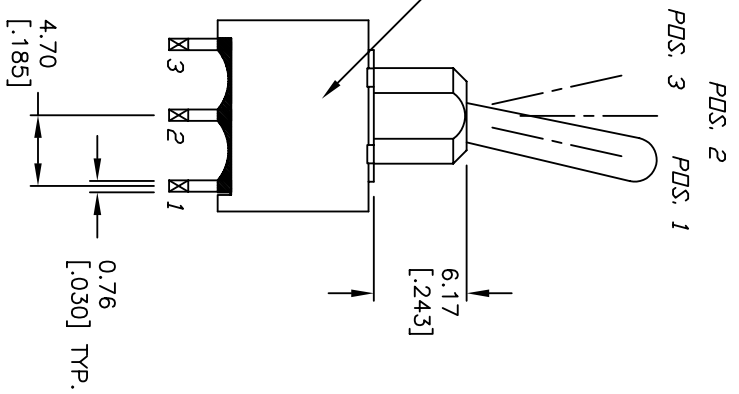

CHANGES NOTED

REV.	ECN No.	DESCRIPTION	DATE	CHKD
D	15876		3/17/06	PH
C	15576	DIM FROM 6.9 TO 6.6	12/2/05	PH
B	12883	REVERSED PIN OUT/ PDS	3/5/03	--
A	12047	RELEASED FOR PRODUCTION	4/9/02	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

REV.	ECN No.	DESCRIPTION	DATE	CHKD
D	15876		3/17/06	PH
C	15576	DIM FROM 6.9 TO 6.6	12/2/05	PH
B	12883	REVERSED PIN OUT/ PDS	3/5/03	--
A	12047	RELEASED FOR PRODUCTION	4/9/02	CJB

TITLE	SCALE	DATE	DR	DWG	REV
100A WSP-2 T1 B4 M6 R E (GOLD CONTACTS)	2:1	4/9/02	CJB	T101022	D

E-SWITCH®