

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[100DP1T1B4M6QE](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

SHEET 0F

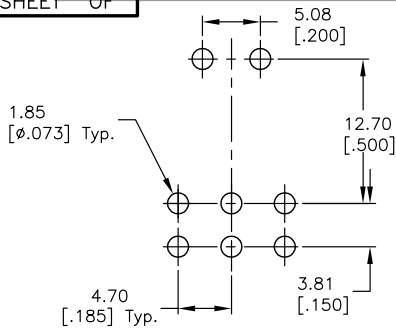

RECOMMEND P.C.B. LAYOUT





CIRCUIT: DPDT
CONTACT CONFIGURATION


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3, 5-6	OPEN	2-1, 5-4

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 5A @120VAC OR 28VDC:
2A @250VAC.
- FIXED TERM. & MOVING CONTACT:
Copper Alloy W/SILVER plate.
- ELECTRICAL LIFE: 50,000 make-and-break cycles
at full load.
- INSULATION RESISTANCE: 1,000M ohm min.
- DIELECTRIC STRENGTH: 1,000V RMS @sea level.
- OPERATING TEMP.: -30°C to +85°C.
- ▲ DENOTES CRITICAL PARAMETER.

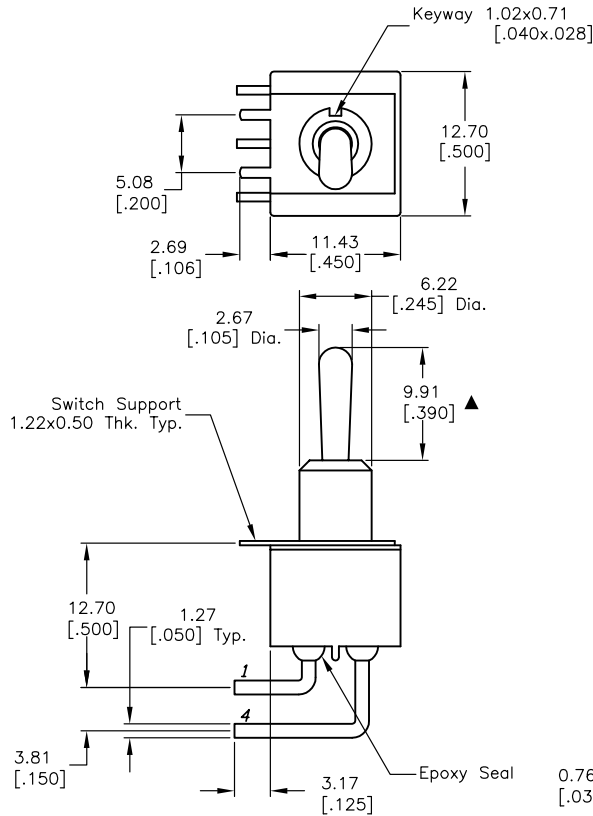

VIEW A-A

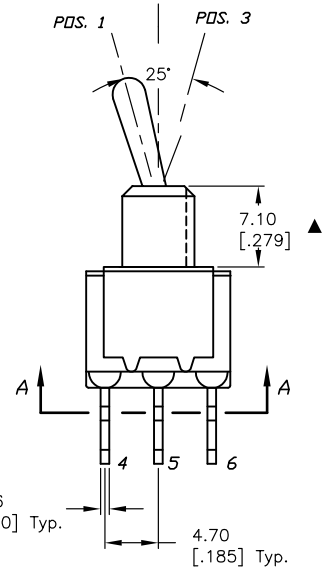

E-SWITCH®

TITLE

100DP1T1B4M6QE

A	13638	RELEASED FOR PRODUCTION	12/4/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

SCALE	2:1	DATE	12/4/03	DR	AR	DWG	T121046	REV	A
-------	-----	------	---------	----	----	-----	---------	-----	---