

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[E-Switch](#)
[100SP4T1B4VS2QE](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

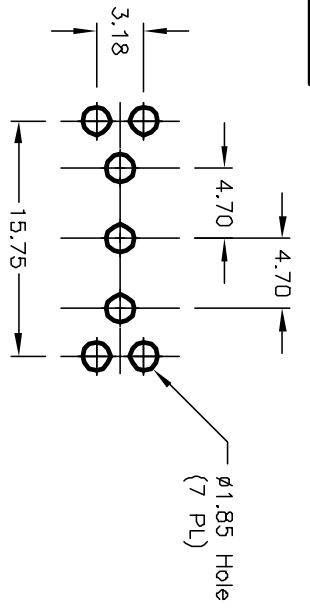

RECOMMENDED P.C.B. LAYOUT





CIRCUIT: SPDT


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
<DN>	<DF>	<DN>
2-3	DPEN	2-1

NOTES: < > = MOMENTARY

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC 2A @250VAC w/Resistive loads
5. FIXED TERM. & MOVING CONTACT: Copper alloy w/SILVER plate
6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS min. @sea level.
9. OPERATING TEMP.: -30°C to +85°C

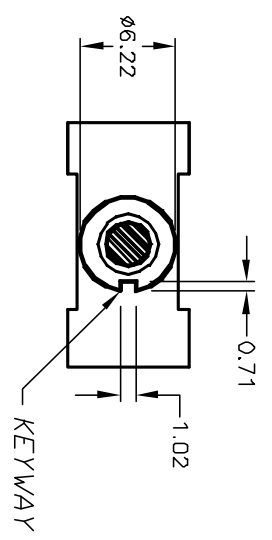

VIEW A-A

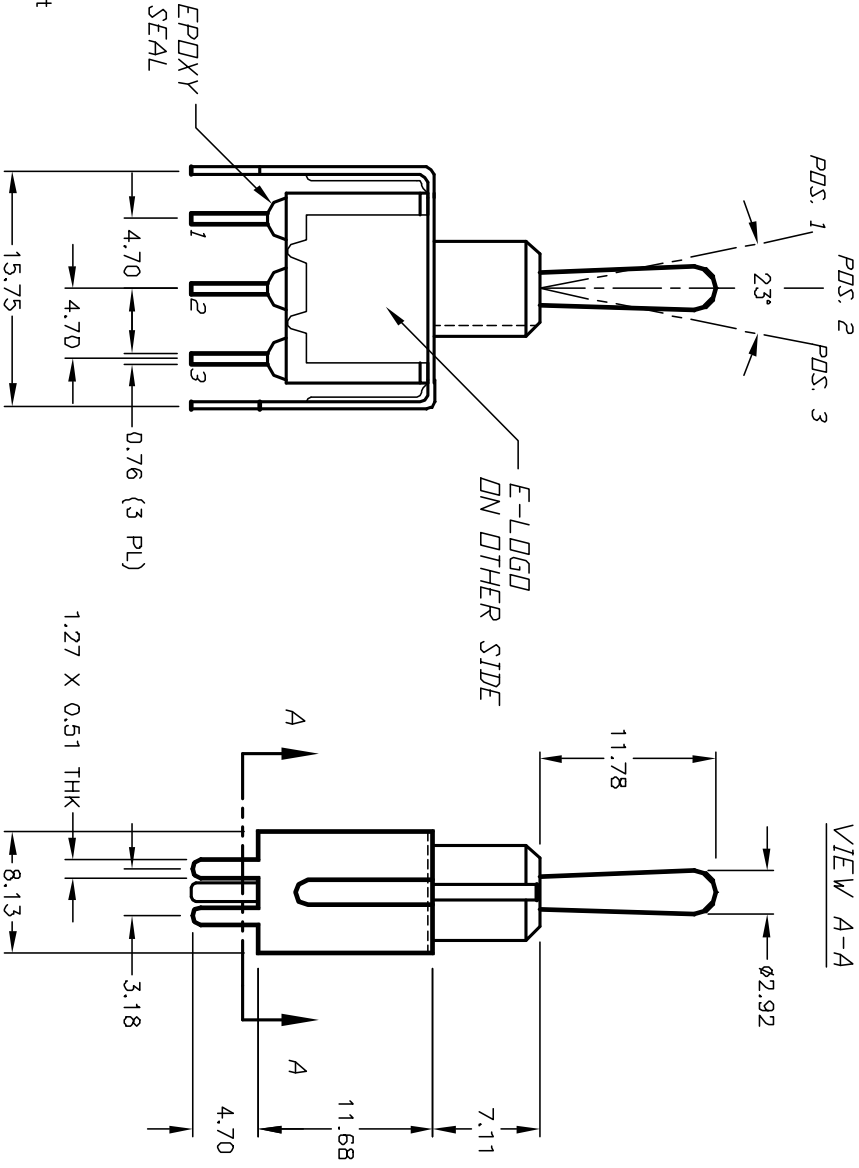

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12045	RELEASED FOR PRODUCTION	4/8/02	CB

TITLE	SCALE	DATE	DR	DWG	REV
100 SP-4 T1 B4 VS2 Q E	2:1	4/8/02	CB	T114016	A

E-SWITCH®

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED